

Classic Pendants



RIP1044
Brushed Aluminum

RIP1052
Brushed Aluminum

24" 32" 42"

Stepped Trim



RIP1060
Brushed Aluminum



RIP1068
Brushed Aluminum

Classic Pendants-24"

RENAISSANCE


24"

Specifications:


- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.


Traditional Trim




RIP1002



RIP1010




RIP1018




RIP1026


Stepped Trim




RIP1042



RIP1050




RIP1058




RIP1066


Bullnose Trim




RIP1082



RIP1090




RIP1098



RIP1106

(40") Overall Height of fixture with metal halide lamping.



A, D, E
Symmetrical
Indirect

Sample model number: **RIP1002 - 2F39/1F39 - 120 - BAL - HP02**

Select Style	Select any Lamping (indirect/bowl illumination)	Select Voltage	Select Finish	Select Options
<p>RIP1002</p> <p>RIP1010</p> <p>RIP1018</p> <p>RIP1026</p> <p>RIP1042</p> <p>RIP1050</p> <p>RIP1058</p> <p>RIP1066</p> <p>RIP1082</p> <p>RIP1090</p> <p>RIP1098</p> <p>RIP1106</p>	<p>1M100PSC / 1F40 100W ED17 PULSE START CERAMIC MH - 40W CIRC T5 A E402-17</p> <p>1M150PSC / 1F40 150W ED17 PULSE START CERAMIC MH - 40W CIRC T5 A E402-17</p> <p>1M250 / 1F40 250W BT28 MH - 40W CIRC T5 A E402-17</p> <p>1M250PS / 1F40 250W ED28 PULSE START MH - 40W CIRC T5 A E402-17</p> <p>1M350PS / 1F40 350W ED28 PULSE START MH - 40W CIRC T5 A E402-17</p> <p>1M400 / 1F40 400W BT28 MH - 40W CIRC T5 A E402-17</p> <p>1M400PS / 1F40 400W ED28 PULSE START MH - 40W CIRC T5 A E402-17</p> <p>1N300 300W PS30 INC B NA</p> <p>2T250 (2) 250W T10 QTZ C E433-75R</p> <p>2F39 / 1F39¹ (2) FT39W/2G11 - (1) FT39W/2G11 D E433-71</p> <p>2F39DM / 1F39¹ (2) FT39W/2G11 - (1) FT39W/2G11 D E433-75R</p> <p>4F32 / 1F22 (4) CFTR32W/GX24q - 22W CIRC T5 E E402-20</p> <p>4F42 / 1F22 (4) CFTR42W/GX24q - 22W CIRC T5 E E402-20</p>	<p>120</p> <p>277</p>	<p>PT__ Painted. (Include Paint Number.)</p> <p>PBR Polished solid brass</p> <p>BBR Brushed solid brass</p> <p>ABR Antique solid brass</p> <p>CPBR Chrome plated polished brass</p> <p>BAL Brushed aluminum</p> <p>ABST Antique brass over steel</p> <p>BBST Brushed brass over steel</p> <p>CPST Polished chrome over steel</p> <p>PBST Polished brass over steel</p> <p><i>See Finish Selection Guide, pages 268-269.</i></p>	<p>OAH__ Pendant length other than standard. (Provide fixture height in inches.)</p> <p>F Fuse option</p> <p>RPI Remote ballast support tray</p> <p>EMI¹ Emergency ballast(s) integral</p> <p>EMR Emergency ballast(s) remote</p> <p>SBA Sandblasted acrylic</p> <p>SAJ Contemporary ballast canopy</p> <p>SAV Traditional ballast canopy</p> <p>SS Separate switching</p> <p>HP01 Silver hand-painted acrylic</p> <p>HP02 Beige hand-painted acrylic</p> <p>HP03 Amber hand-painted acrylic</p> <p>FIN Finial option</p>

TRADITIONAL




STEPPED

BULL NOSE

Lamping Detail (indirect - bowl illumination) Optical Pkg. Photometry


DM = Dimming ballast(s) provided *If Photometry is not available, consult factory for further details.*

¹Denotes lamping options available with **EMI**

For further detail on options, see Technical Notes on page 264.

OPTICAL PACKAGES

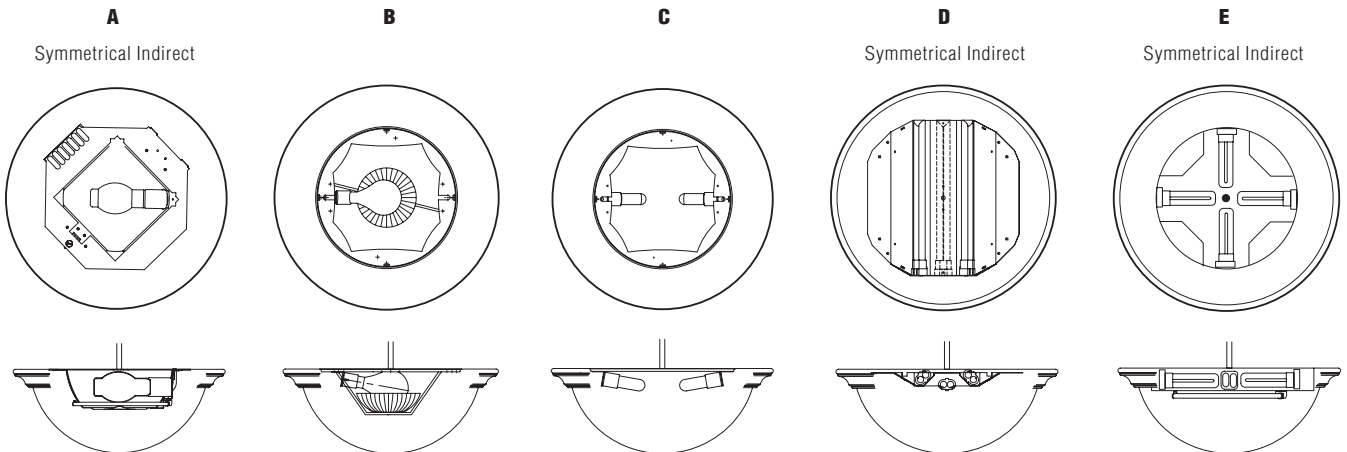

Classic Pendants-32"


RENAISSANCE

32"


Specifications:

- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)


Traditional Trim




RIP1004



RIP1012




RIP1020




RIP1028


Stepped Trim




RIP1044



RIP1052




RIP1060




RIP1068


Bullnose Trim




RIP1084



RIP1092




RIP1100



RIP1108

Design modification rights reserved.



A, C, D
Symmetrical
Indirect

E
Wide
Indirect

F
Symmetrical
Direct

Sample model number: **RIP1004 - 6F39/1F22 - 120 - BAL - HP02**

Select Style

Select any Lamping
(indirect/bowl illumination)

Select Voltage

Select Finish

Select Options

TRADITIONAL

STEPPED

BULLNOSE


Model	Lamping Detail (indirect - bowl illumination)	Optical Pkg. Photometry
RIP1004	1M100PSC / 1F40 ¹	100W ED17 PULSE START CERAMIC MH - 40W CIRC T5 A E402-17
RIP1012	1M150PSC / 1F40 ¹	150W ED17 PULSE START CERAMIC MH - 40W CIRC T5 A E402-17
RIP1020	1M250 / 1F40 ¹	250W BT28 MH - 40W CIRC T5 A E402-17
RIP1028	1M250PS / 1F40 ¹	250W ED28 PULSE START MH - 40W CIRC T5 A E402-17
	1M350PS / 1F40 ¹	350W ED28 PULSE START MH - 40W CIRC T5 A E402-17
RIP1044	1M400 / 1F40 ¹	400W BT28 MH - 40W CIRC T5 A E402-17
RIP1052	1M400PS / 1F40 ¹	400W BT28 PULSE START MH - 40W CIRC T5 A E402-17
RIP1060	3N150	(3) 150W A21 INC B NA
RIP1068	3T250	(3) 250W T10 QTZ B NA
	4F40 / 2F40 ¹	(4) FT40W/2G11 - (2) FT40W/2G11 C E433-72
RIP1084	4F40DM / 2F40 ¹	(4) FT40W/2G11 - (2) FT40W/2G11 C E433-72
RIP1092	6F40 / 1F40 ¹	(6) FT40W/2G11 - 40W CIRC T5 D E433-87
RIP1100	6F55 / 1F40 ¹	(6) FT55W/2G11 - 40W CIRC T5 D E433-87
RIP1108	6F39 / 1F22 ¹	(6) FT39W/2G11 - 22W CIRC T5 E NA
	3F39-3F40 / 1F22 ¹	(3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5 E NA
	3F39-3F55 / 1F22 ¹	(3) FT39W/2G11 - (3) FT55W/2G11 - 22W CIRC T5 E NA
	6F40 / 1F22 ²	(6) FT40W/2G11 - 22W CIRC T5 E NA
	6F40DM / 1F22 ²	(6) FT40W/2G11 - 22W CIRC T5 E NA
	6F55 / 1F22 ²	(6) FT55W/2G11 - 22W CIRC T5 E NA
	6F39DM / 1F22	(6) FT39W/2G11 - 22W CIRC T5 E NA
	3F39DM-3F40DM / 1F22	(3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5 E NA
	2F40 / 4F40	(2) FT40W/2G11 - (4) FT40W/2G11 F ITL3691A

120
277

PT	Painted. (Include Paint Number.)
PBR	Polished solid brass
BBR	Brushed solid brass
ABR	Antique solid brass
CPBR	Chrome plated polished brass
BAL	Brushed aluminum
ABST	Antique brass over steel
BBST	Brushed brass over steel
CPST	Polished chrome over steel
PBST	Polished brass over steel

See Finish Selection Guide, pages 268-269.

OAH	Pendant length other than standard. (Provide fixture height in inches.)
F	Fuse option (M and F)
EMI ¹	Emergency ballast(s) integral
EMR	Emergency ballast(s) remote
SBA	Sandblasted acrylic
SAJ	Contemporary ballast canopy
SAV	Traditional ballast canopy
SS	Separate switching
HP01	Silver hand-painted acrylic
HP02	Beige hand-painted acrylic
HP03	Amber hand-painted acrylic
FIN	Final option (standard with E optical package)



For further detail on options, see Technical Notes on page 264.


DM = Dimming ballast(s) provided

If Photometry is not available, consult factory for further details.

¹Denotes lamping options available with EMI

²This lamping option is only available with RIP1084, 1092, 1100 or 1108

OPTICAL PACKAGES

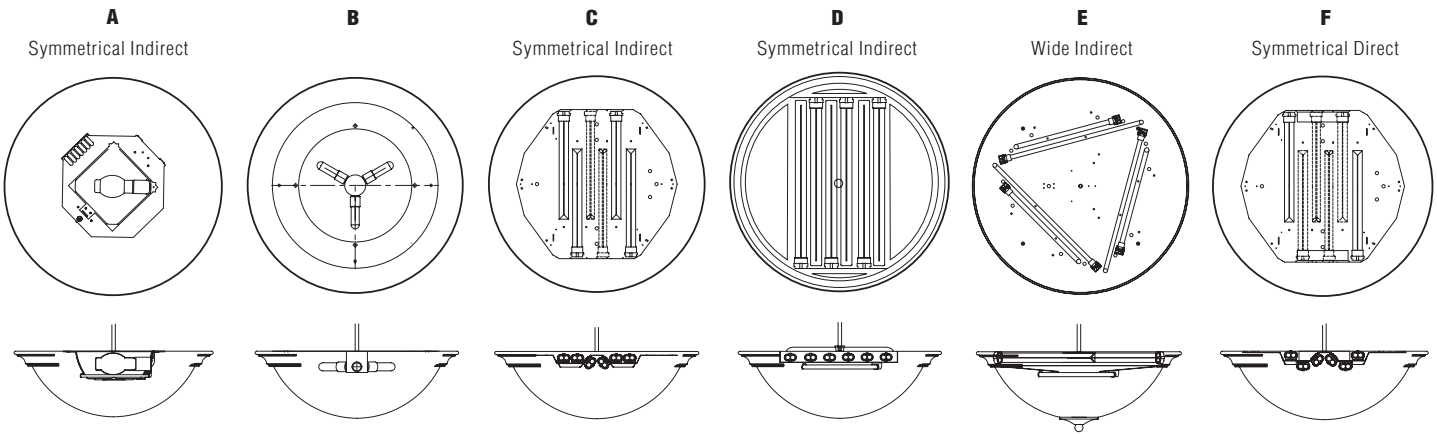

Classic Pendants-42"


RENAISSANCE

42"


Specifications:

- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)


Traditional Trim




RIP1006



RIP1014




RIP1022




RIP1030


Stepped Trim




RIP1046



RIP1054




RIP1062




RIP1070


Bullnose Trim




RIP1086



RIP1094




RIP1102



RIP1110

Design modification rights reserved.

Complete photometric data
on page 254

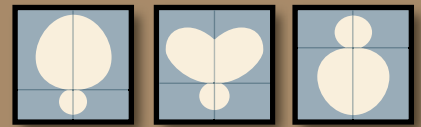

A, B, E, F
Symmetrical
Indirect

G
Wide
Indirect

H
Symmetrical
Direct

Sample model number: **RIP1006 - 6F55/1F40 - 120 - BAL - HP02**

Select Style

Select any Lamping
(indirect/bowl illumination)

Select Voltage

Select Finish

Select Options

TRADITIONAL

STEPPED

BULLNOSE

Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg.	Photometry
RIP1006	2M400 / 3F39 ¹	(2) 400W ED37 MH - (3) FT39W/2G11	A	E411-28
RIP1014	2M400PS / 3F39 ¹	(2) 400W ED37 PULSE START MH - (3) FT39W/2G11	A	E411-28
RIP1022	2M350PS / 3F39 ¹	(2) 350W ED28 PULSE START MH - (3) FT39W/2G11	A	E411-28
RIP1030	1M250 / 3F39 ¹	250W ED28 MH - (3) FT39W/2G11	B	E403-27
	1M250PS / 3F39 ¹	250W ED28 PULSE START MH - (3) FT39W/2G11	B	E403-27
RIP1046	1M350PS / 3F39 ¹	350W ED28 PULSE START MH - (3) FT39W/2G11	B	E403-27
RIP1054	1M400 / 3F39	400W ED37 MH - (3) FT39W/2G11	B	E403-27
RIP1062	1M400PS / 3F39	400W ED37 PULSE START MH - (3) FT39W/2G11	B	E403-27
RIP1070	1M1000 / 3F39	1000W BT37 MH - (3) FT39W/2G11	B	E403-27
	3N300	(3) 300W PS30 INC	C	NA
RIP1086	4T350 / 4N40	(4) 350 T3 QTZ - (4) 40W T10 INC	D	NA
RIP1094	6F40 / 3F40 ¹	(6) FT40W/2G11 - (3) FT40W/2G11	E	E433-73
RIP1102	6F40DM / 3F40	(6) FT40W/2G11 - (3) FT40W/2G11	E	E433-73
RIP1110	8F40 / 1F40 ¹	(8) FT40W/2G11 - 40W CIRC T5	E	E433-88
	8F40DM / 1F40	(8) FT40W/2G11 - 40W CIRC T5	E	E433-88
	8F55 / 1F40 ¹	(8) FT55W/2G11 - 40W CIRC T5	F	E433-88
	8F55DM / 1F40	(8) FT55W/2G11 - 40W CIRC T5	F	E433-88
	6F55 / 1F40 ¹	(6) FT55W/2G11 - 40W CIRC T5	G	NA
	6F55DM / 1F40	(6) FT55W/2G11 - 40W CIRC T5	G	NA
	3F40 / 6F40	(3) FT40W/2G11 - (6) FT40W/2G11	H	ITL36915

120
277

PT__	Painted. (Include Paint Number.)
PBR	Polished solid brass
BBR	Brushed solid brass
ABR	Antique solid brass
CPBR	Chrome plated polished brass
BAL	Brushed aluminum
ABST	Antique brass over steel
BBST	Brushed brass over steel
CPST	Polished chrome over steel
PBST	Polished brass over steel

See Finish Selection Guide, pages 268-269.

OAH__	Pendant length other than standard. (Provide fixture height in inches.)
F	Fuse option (M and F)
EMI ¹	Emergency ballast(s) integral
EMR	Emergency ballast(s) remote
SBA	Sandblasted acrylic
SAJ	Contemporary ballast canopy
SAV	Traditional ballast canopy
SS	Separate switching
HP01	Silver hand-painted acrylic
HP02	Beige hand-painted acrylic
HP03	Amber hand-painted acrylic
FIN	Finial option



For further detail on options,
see Technical Notes on page 264.

DM = Dimming ballast(s) provided

If Photometry is not available,
consult factory for further details.

¹Denotes lamping options available with EMI

The lamping is per bowl of the Chandelier.

OPTICAL PACKAGES

