

Cone Arm Sconce & Sconce



RIW1220
Brushed Aluminum



RIW1210
Chrome Plated Polished Brass

16"

Sloped Trim

24"

Stepped Trim



RIW1080
Brushed Aluminum



RIW1070
Chrome Plated Polished Brass


Cone Sconce

RENAISSANCE


16"

24"

Sloped Trim

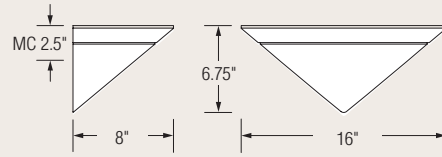


RIW1070

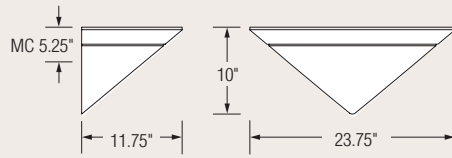


RIW1072

Stepped Trim

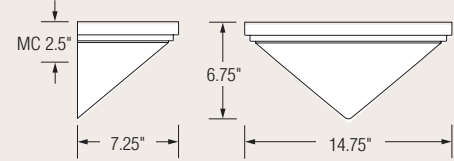

RIW1080

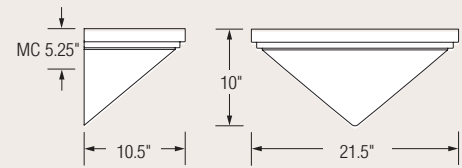

RIW1082

Specifications:

- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Backplate attaches to standard 4" octagonal junction box.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.



D
Forward-throw
Asymmetric

Sample model number: **RIW1072 - 1F26/1F13 - 120 - BAL - HP02**

Select Style		Select any Lamping (indirect/bowl illumination)		Select Voltage		Select Finish		Select Options	
16"	RIW1070 RIW1080	2F13 1N75	(2) CFQ13W/G24q 75W A19 INC	A B	NA NA	120 277	PT Painted. (Include Paint Number.) PBR Polished solid brass BBR Brushed solid brass ABR Antique solid brass CPBR Chrome plated polished brass BAL Brushed aluminum ABST Antique brass over steel BBST Brushed brass over steel CPST Polished chrome over steel PBST Polished brass over steel	F Fuse option (M and F) EMR Emergency ballast(s) remote SBA Sandblasted acrylic SS Separate switching HP01 Silver hand-painted acrylic HP02 Beige hand-painted acrylic HP03 Amber hand-painted acrylic	
24"	RIW1072 RIW1082	1F26/1F13 1F26DM/1F13 2F39/1F13 1N150 1T150/1N25 1M150/1F13	CFQ26W/G24q - CFQ13W/G24q CFQ26W/G24q - CFQ13W/G24q (2) FT39W/2G11 - CFQ13W/G24q 150W A21 INC 150W T10 QTZ - 25W T10 INC 150W T6/G12 MH - CFQ13W/G24q	D D C E D D	E433-86 E433-86 E433-86 NA E433-82R NA				

DM = Dimming ballast(s) provided

If Photometry is not available, consult factory for further details.

See Finish Selection Guide, pages 268-269.

For further detail on options, see Technical Notes on page 264.

OPTICAL PACKAGES

