

Drum Pendants



RIP1484
Brushed Brass

RIP1500
Brushed Brass

24" 32"

Stepped Trim



RIP1492
Brushed Brass



RIP1508
Brushed Brass

Drum Pendants-24"

RENAISSANCE





24"

Specifications:





- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.

Sloped Trim



Stepped Trim



(38.5") Overall Height of fixture with metal halide lamping.

(38.25") Overall Height of fixture with metal halide lamping.



A, D, E
Symmetrical
Indirect

Sample model number: **RIP1442 - 2F39/1F39 - 120 - BAL - HP02**

Select Style	Select any Lamping (indirect/bowl illumination)	Select Voltage	Select Finish	Select Options
<p>RIP1442</p> <p>RIP1450</p> <p>RIP1458</p> <p>RIP1466</p> <p>RIP1482</p> <p>RIP1490</p> <p>RIP1498</p> <p>RIP1506</p>	<p>1M100PSC/1F40 100W ED17 PULSE START CERAMIC MH - 40W CIRC T5 A E402-17</p> <p>1M150PSC/1F40 150W ED17 PULSE START CERAMIC MH - 40W CIRC T5 A E402-17</p> <p>1M250/1F40 250W BT28 MH - 40W CIRC T5 A E402-17</p> <p>1M250PS/1F40 250W ED28 PULSE START MH - 40W CIRC T5 A E402-17</p> <p>1M350PS/1F40 350W ED28 PULSE START MH - 40W CIRC T5 A E402-17</p> <p>1M400/1F40 400W BT28 MH - 40W CIRC T5 A E402-17</p> <p>1M400PS/1F40 400W ED28 PULSE START MH - 40W CIRC T5 A E402-17</p> <p>1N300 300W PS30 INC B NA</p> <p>2T250 (2) 250W T10 QTZ C E433-75R</p> <p>2F39/1F39¹ (2) FT39W/2G11 - (1) 39W/2G11 D E433-71</p> <p>2F39DM/1F39¹ (2) FT39W/2G11 - (1) 39W/2G11 D E433-71</p> <p>4F32/1F22 (4) CFTR32W/GX24q - 22W CIRC T5 E E402-20</p> <p>4F42/1F22 (4) CFTR42W/GX24q - 22W CIRC T5 E E402-20</p>	<p>120</p> <p>277</p>	<p>PT Painted. (Include Paint Number.)</p> <p>PBR Polished solid brass</p> <p>BBR Brushed solid brass</p> <p>ABR Antique solid brass</p> <p>CPBR Chrome plated polished brass</p> <p>BAL Brushed aluminum</p> <p>ABST Antique brass over steel</p> <p>BBST Brushed brass over steel</p> <p>CPST Polished chrome over steel</p> <p>PBST Polished brass over steel</p> <p><i>See Finish Selection Guide, pages 268-269.</i></p>	<p>OAH Pendant length other than standard. (Provide fixture height in inches.)</p> <p>F Fuse option (M and F)</p> <p>RPI Remote ballast support tray</p> <p>EMI¹ Emergency ballast(s) integral</p> <p>EMR Emergency ballast(s) remote</p> <p>SBA Sandblasted acrylic</p> <p>SS Separate switching</p> <p>HP01 Silver hand-painted acrylic</p> <p>HP02 Beige hand-painted acrylic</p> <p>HP03 Amber hand-painted acrylic</p> <p>FIN Finial option</p>

DM = Dimming ballast(s) provided

¹Denotes lamping options available with **EMI**


If Photometry is not available, consult factory for further details.

Sloped

Stepped

For further detail on options, see Technical Notes on page 264.

OPTICAL PACKAGES

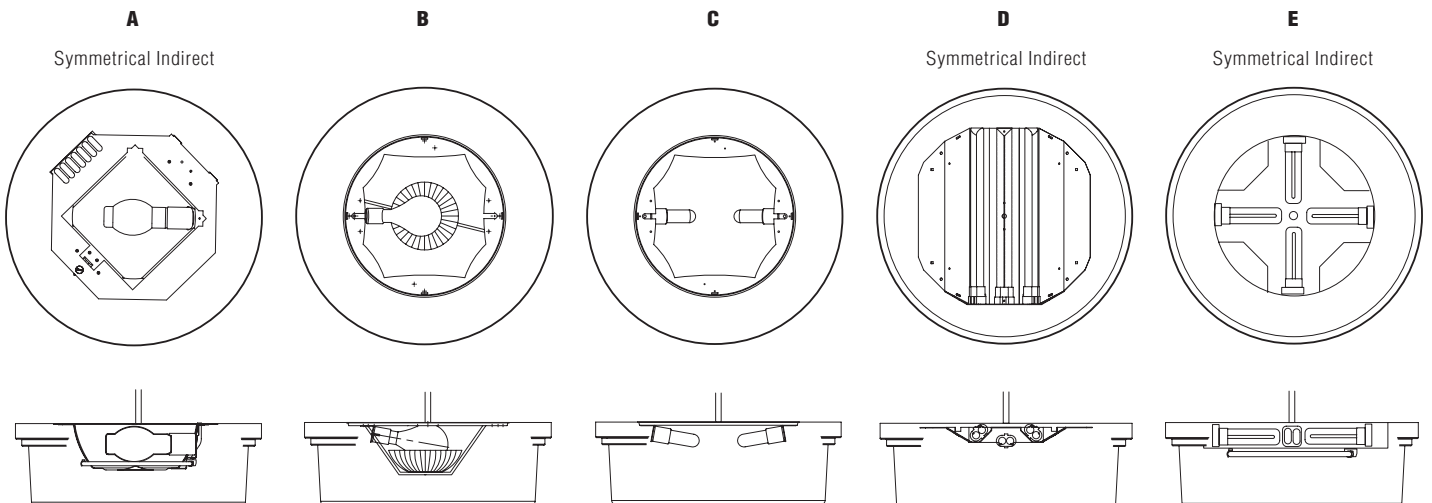

Drum Pendants-32"





RENAISSANCE

32"





Specifications:

- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)


Sloped Trim



Stepped Trim



Design modification rights reserved.

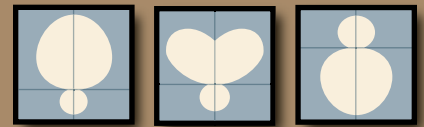

A, C, D
Symmetrical Indirect

E
Wide Indirect

F
Symmetrical Direct

Sample model number: **RIP1444 - 1M400/1F40 - 120 - BAL - HP02**

Select Style

Select any Lamping
(indirect/bowl illumination)

Select Voltage

Select Finish

Select Options

SLOPED

STEPPED

Style	Lamping Detail (indirect - bowl illumination)	Optical Pkg. Photometry
RIP1444	1M150PSC/1F40 150W ED17 PULSE START CERAMIC MH - 40W CIRC T5 A E402-17	
RIP1452	1M250/1F40 250W BT28 MH - 40W CIRC T A E402-17	
RIP1460	1M250PS/1F40 250W ED28 PULSE START MH - 40W CIRC T5 A E402-17	
RIP1468	1M350PS/1F40 350W ED28 PULSE START MH - 40W CIRC T5 A E402-17	
	1M400/1F40 400W BT28 MH - 40W CIRC T5 A E402-17	
	1M400PS/1F40 400W ED28 PULSE START MH - 40W CIRC T5 A E402-17	
RIP1484	3N150 (3) 150W A21 INC B NA	
RIP1492	3T250 (3) 250W T10 QTZ B NA	
RIP1500	4F40/2F40¹ (4) FT40W/2G11 - (2) FT40W/2G11 C E433-72	
RIP1508	4F40DM/2F40¹ (4) FT40W/2G11 - (2) FT40W/2G11 C E433-72	
	6F40/1F40¹ (6) FT40W/2G11 - 40W CIRC T5 D E433-87	
	6F40DM/1F40¹ (6) FT40W/2G11 - 40W CIRC T5 D E433-87	
	6F55/1F40¹ (6) FT55W/2G11 - 40W CIRC T5 D E433-87	
	6F39/1F22¹ (6) FT39W/2G11 - 22W CIRC T5 E NA	
	6F39DM/1F22 (6) FT39W/2G11 - 22W CIRC T5 E NA	
	3F39-3F40/1F22¹ (3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5 E NA	
	3F39DM-3F40DM/1F22 (3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5 E NA	
	3F39-3F55/1F22 (3) FT39W/2G11 - (3) FT55W/2G11 - 22W CIRC T5 E NA	
	2F40/4F40 (2) FT40W/2G11 - (4) FT40W/2G11 F NA	

120
277

PT __	Painted. (Include Paint Number.)
PBR	Polished solid brass
BBR	Brushed solid brass
ABR	Antique solid brass
CPBR	Chrome plated polished brass
BAL	Brushed aluminum
ABST	Antique brass over steel
BBST	Brushed brass over steel
CPST	Polished chrome over steel
PBST	Polished brass over steel

See Finish Selection Guide, pages 268-269.

OAH __	Pendant length other than standard. (Provide fixture height in inches.)
F	Fuse option (M and F)
RPI	Remote ballast support tray
EMI ¹	Emergency ballast(s) integral
EMR	Emergency ballast(s) remote
SBA	Sandblasted acrylic
SS	Separate switching
HP01	Silver hand-painted acrylic
HP02	Beige hand-painted acrylic
HP03	Amber hand-painted acrylic
FIN	Finial option (standard with E optical package)



For further detail on options, see Technical Notes on page 264.

DM = Dimming ballast(s) provided

If Photometry is not available, consult factory for further details.

¹Denotes lamping options available with **EMI**

OPTICAL PACKAGES

