

Drum Pendants



RIP1444
Chrome Plated Polished Brass

RIP1468
Chrome Plated Polished Brass

24" 32"

Sloped Trim



RIP1452
Chrome Plated Polished Brass



RIP1460
Chrome Plated Polished Brass

Drum Pendants-24"

RENAISSANCE





24"

Specifications:





- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.

Sloped Trim



Stepped Trim



(38.5") Overall Height of fixture with metal halide lamping.

(38.25") Overall Height of fixture with metal halide lamping.



A, D, E
Symmetrical
Indirect

Sample model number: **RIP1442 - 2F39/1F39 - 120 - BAL - HP02**

Select Style	Select any Lamping (indirect/bowl illumination)	Select Voltage	Select Finish	Select Options
RIP1442	1M100PSC/1F40 100W ED17 PULSE START CERAMIC MH - 40W CIRC T5 A E402-17	120	PT__ Painted. (Include Paint Number.)	OAH__ Pendant length other than standard. (Provide fixture height in inches.)
RIP1450	1M150PSC/1F40 150W ED17 PULSE START CERAMIC MH - 40W CIRC T5 A E402-17	277	PBR Polished solid brass	F Fuse option (M and F)
RIP1458	1M250/1F40 250W BT28 MH - 40W CIRC T5 A E402-17		BBR Brushed solid brass	RPI Remote ballast support tray
RIP1466	1M250PS/1F40 250W ED28 PULSE START MH - 40W CIRC T5 A E402-17		ABR Antique solid brass	EMI¹ Emergency ballast(s) integral
RIP1482	1M350PS/1F40 350W ED28 PULSE START MH - 40W CIRC T5 A E402-17		CPBR Chrome plated polished brass	EMR Emergency ballast(s) remote
RIP1490	1M400/1F40 400W BT28 MH - 40W CIRC T5 A E402-17		BAL Brushed aluminum	SBA Sandblasted acrylic
RIP1498	1M400PS/1F40 400W ED28 PULSE START MH - 40W CIRC T5 A E402-17		ABST Antique brass over steel	SS Separate switching
RIP1506	1N300 300W PS30 INC B NA		BBST Brushed brass over steel	HP01 Silver hand-painted acrylic
	2T250 (2) 250W T10 QTZ C E433-75R		CPST Polished chrome over steel	HP02 Beige hand-painted acrylic
	2F39/1F39¹ (2) FT39W/2G11 - (1) 39W/2G11 D E433-71		PBST Polished brass over steel	HP03 Amber hand-painted acrylic
	2F39DM/1F39¹ (2) FT39W/2G11 - (1) 39W/2G11 D E433-71			FIN Finial option
	4F32/1F22 (4) CFTR32W/GX24q - 22W CIRC T5 E E402-20			
	4F42/1F22 (4) CFTR42W/GX24q - 22W CIRC T5 E E402-20			

DM = Dimming ballast(s) provided *If Photometry is not available, consult factory for further details.*


¹Denotes lamping options available with **EMI**

Sloped

Stepped

For further detail on options, see Technical Notes on page 264.

OPTICAL PACKAGES

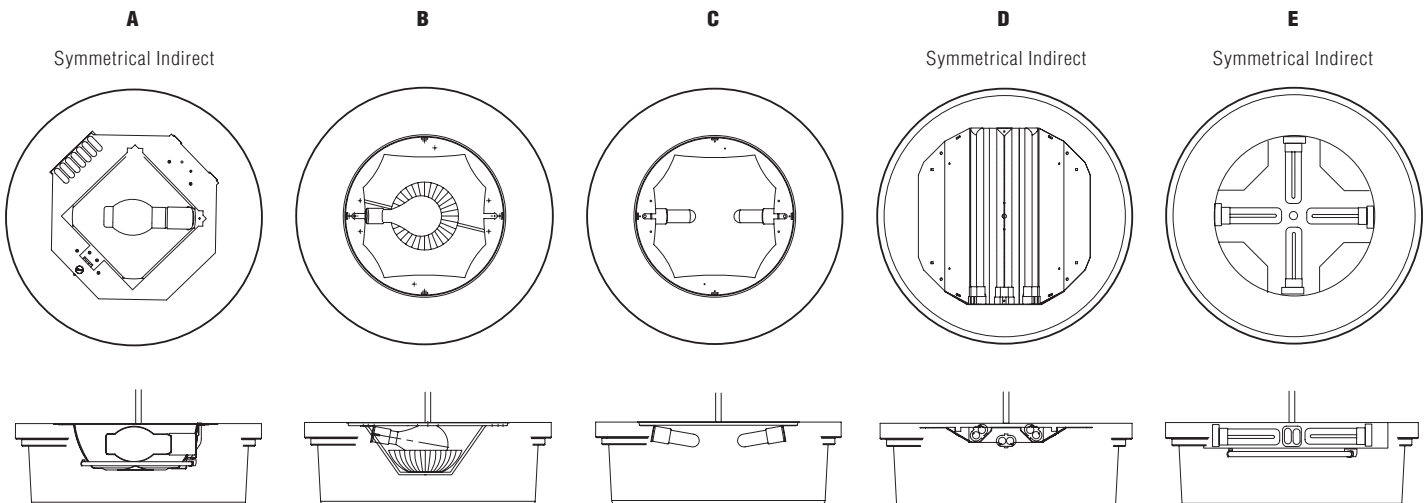

Drum Pendants-32"





RENAISSANCE

32"





Specifications:

- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)


Sloped Trim




Stepped Trim




Design modification rights reserved.



A, C, D
Symmetrical
Indirect



E
Wide
Indirect



F
Symmetrical
Direct

Sample model number: **RIP1444 - 1M400/1F40 - 120 - BAL - HP02**

Select Style	Select any Lamping (indirect/bowl illumination)	Select Voltage	Select Finish	Select Options
<p>RIP1444</p> <p>RIP1452</p> <p>RIP1460</p> <p>RIP1468</p> <p>RIP1484</p> <p>RIP1492</p> <p>RIP1500</p> <p>RIP1508</p>	<p>1M150PSC/1F40 150W ED17 PULSE START CERAMIC MH - 40W CIRC T5 A E402-17</p> <p>1M250/1F40 250W BT28 MH - 40W CIRC T A E402-17</p> <p>1M250PS/1F40 250W ED28 PULSE START MH - 40W CIRC T5 A E402-17</p> <p>1M350PS/1F40 350W ED28 PULSE START MH - 40W CIRC T5 A E402-17</p> <p>1M400/1F40 400W BT28 MH - 40W CIRC T5 A E402-17</p> <p>1M400PS/1F40 400W ED28 PULSE START MH - 40W CIRC T5 A E402-17</p> <p>3N150 (3) 150W A21 INC B NA</p> <p>3T250 (3) 250W T10 QTZ B NA</p> <p>4F40/2F40¹ (4) FT40W/2G11 - (2) FT40W/2G11 C E433-72</p> <p>4F40DM/2F40¹ (4) FT40W/2G11 - (2) FT40W/2G11 C E433-72</p> <p>6F40/1F40¹ (6) FT40W/2G11 - 40W CIRC T5 D E433-87</p> <p>6F40DM/1F40¹ (6) FT40W/2G11 - 40W CIRC T5 D E433-87</p> <p>6F55/1F40¹ (6) FT55W/2G11 - 40W CIRC T5 D E433-87</p> <p>6F39/1F22¹ (6) FT39W/2G11 - 22W CIRC T5 E NA</p> <p>6F39DM/1F22 (6) FT39W/2G11 - 22W CIRC T5 E NA</p> <p>3F39-3F40/1F22¹ (3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5 E NA</p> <p>3F39DM-3F40DM/1F22 (3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5 E NA</p> <p>3F39-3F55/1F22 (3) FT39W/2G11 - (3) FT55W/2G11 - 22W CIRC T5 E NA</p> <p>2F40/4F40 (2) FT40W/2G11 - (4) FT40W/2G11 F NA</p>	<p>120</p> <p>277</p>	<p>PT Painted. (Include Paint Number.)</p> <p>PBR Polished solid brass</p> <p>BBR Brushed solid brass</p> <p>ABR Antique solid brass</p> <p>CPBR Chrome plated polished brass</p> <p>BAL Brushed aluminum</p> <p>ABST Antique brass over steel</p> <p>BBST Brushed brass over steel</p> <p>CPST Polished chrome over steel</p> <p>PBST Polished brass over steel</p> <p><i>See Finish Selection Guide, pages 268-269.</i></p>	<p>OAH Pendant length other than standard. (Provide fixture height in inches.)</p> <p>F Fuse option (M and F)</p> <p>RPI Remote ballast support tray</p> <p>EMI¹ Emergency ballast(s) integral</p> <p>EMR Emergency ballast(s) remote</p> <p>SBA Sandblasted acrylic</p> <p>SS Separate switching</p> <p>HP01 Silver hand-painted acrylic</p> <p>HP02 Beige hand-painted acrylic</p> <p>HP03 Amber hand-painted acrylic</p> <p>FIN Finial option (standard with E optical package)</p>

Lamping Detail (indirect - bowl illumination) **Optical Pkg. Photometry**

SLOPED (RIP1444 - RIP1468) **STEPPED** (RIP1484 - RIP1508)

DM = Dimming ballast(s) provided *If Photometry is not available, consult factory for further details.*

¹Denotes lamping options available with **EMI**

SLOPED

STEPPED

For further detail on options, see Technical Notes on page 264.

OPTICAL PACKAGES

