

Retro Arm Sconce & Sconce



RIW1140
Brushed Aluminum

16" 24"

Stepped Trim




RIW1040
Brushed Aluminum


16"

24"

Stepped Trim

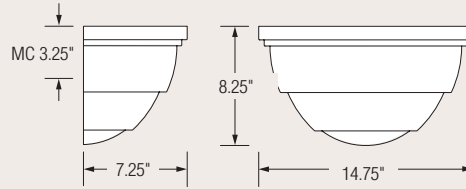

RIW1040

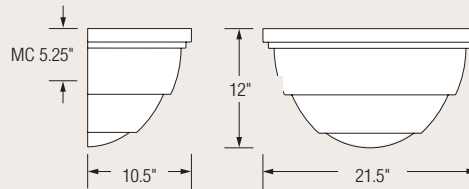

RIW1042

MC = Mounting Center

Specifications:

- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- H.I.D. ballasts are magnetic HX-HPF for 150 watt and below. Magnetic CWA-HPF ballasts are used for over 150 watts. H.I.D. ballasts are remote mounted.
- Ballasts are thermally protected.
- Fluorescent ballasts have a Class "A" and H.I.D. a Class "B" sound rating.
- Backplate attaches to standard 4" octagonal junction box.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.



B, F
Forward-throw
Asymmetric

Sample model number: **RIW1042** - **1M150/1F13** - **120** - **BAL** - **HP02**

Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg. Photometry	Select Voltage	Select Finish	Select Options																
16" RIW1040	2F13	(2) CFQ13W/G24q	A NA	120 277	PT Painted. (Include Paint Number.)	<table border="1"> <tr><td>F</td><td>Fuse option (M and F)</td></tr> <tr><td>RPI</td><td>Remote ballast support tray</td></tr> <tr><td>EMR</td><td>Emergency ballast(s) remote</td></tr> <tr><td>SBA</td><td>Sandblasted acrylic</td></tr> <tr><td>SS</td><td>Separate switching</td></tr> <tr><td>HP01</td><td>Silver hand-painted acrylic</td></tr> <tr><td>HP02</td><td>Beige hand-painted acrylic</td></tr> <tr><td>HP03</td><td>Amber hand-painted acrylic</td></tr> </table> <p><i>For further detail on options, see Technical Notes on page 264.</i></p>	F	Fuse option (M and F)	RPI	Remote ballast support tray	EMR	Emergency ballast(s) remote	SBA	Sandblasted acrylic	SS	Separate switching	HP01	Silver hand-painted acrylic	HP02	Beige hand-painted acrylic	HP03	Amber hand-painted acrylic
	F	Fuse option (M and F)																				
	RPI	Remote ballast support tray																				
EMR	Emergency ballast(s) remote																					
SBA	Sandblasted acrylic																					
SS	Separate switching																					
HP01	Silver hand-painted acrylic																					
HP02	Beige hand-painted acrylic																					
HP03	Amber hand-painted acrylic																					
1T75/1N25	75W DC BAY QTZ - 25W T10 INC	B NA	PBR Polished solid brass																			
1N75	75W A19 INC	C NA	BBR Brushed solid brass																			
24" RIW1042	1N150	150W A21 INC	E NA	ABR Antique solid brass	<p>See Finish Selection Guide, pages 268-269.</p>																	
	2F39/1F13	(2) FT39W/2G11 - CFQ13W/G24q	D NA	CPBR Chrome plated polished brass																		
	1F26/1F13	CFQ26W/G24q - CFQ13W/G24q	F E433-86	BAL Brushed aluminum																		
	1F26DM/1F13	CFQ26W/G24q - CFQ13W/G24q	F E433-86	ABST Antique brass over steel																		
	1T150/1N25	150W T10 QTZ - 25W T10 INC	F E433-82R	BBST Brushed brass over steel																		
	1M150/1F13	150W T6/G12 MH - CFQ13W/G24q	F NA	CPST Polished chrome over steel																		
				PBST Polished brass over steel																		

DM = Dimming ballast(s) provided

If Photometry is not available, consult factory for further details.

OPTICAL PACKAGES

