

# Shallow Pendants



RIP1404  
Brushed Aluminum

RIP1428  
Brushed Aluminum

# 24" 32"

Stepped Trim



RIP1412  
Brushed Aluminum




RIP1420  
Brushed Aluminum

# Shallow Pendants-24"


RENAISSANCE

# 24"


## Stepped Trim




RIP1402



RIP1418



RIP1410




RIP1426

### Specifications:


- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- Ballasts are thermally protected and have Class "A" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.




**A**  
Symmetrical  
Indirect

Sample model number: **RIP1402 - 2F39/1F22 - 120 - BAL - HP02**

<p><b>Select Style</b></p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-bottom: 5px;"></div> <p>▼</p> <div style="border: 1px solid black; padding: 5px;"> <p><b>RIP1402</b></p> <p><b>RIP1410</b></p> <p><b>RIP1418</b></p> <p><b>RIP1426</b></p> </div>	<p><b>Select any Lamping</b> (indirect/bowl illumination)</p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-bottom: 5px;"></div> <p>▼</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 20%;"></th> <th style="width: 20%;">Lamping Detail (indirect - bowl illumination)</th> <th style="width: 20%;">Optical Pkg.</th> <th style="width: 20%;">Photometry</th> </tr> </thead> <tbody> <tr> <td><b>2F27 / 1F22</b></td> <td>(2) FT27W/2G11 - 22W CIRC T5</td> <td>A</td> <td>E433-71</td> </tr> <tr> <td><b>2F39 / 1F22</b></td> <td>(2) FT39W/2G11 - 22W CIRC T5</td> <td>A</td> <td>E433-71</td> </tr> <tr> <td><b>2F39DM / 1F22</b></td> <td>(2) FT39W/2G11 - 22W CIRC T5</td> <td>A</td> <td>E433-71</td> </tr> </tbody> </table> <p><b>DM</b> = Dimming ballast(s) provided</p>		Lamping Detail (indirect - bowl illumination)	Optical Pkg.	Photometry	<b>2F27 / 1F22</b>	(2) FT27W/2G11 - 22W CIRC T5	A	E433-71	<b>2F39 / 1F22</b>	(2) FT39W/2G11 - 22W CIRC T5	A	E433-71	<b>2F39DM / 1F22</b>	(2) FT39W/2G11 - 22W CIRC T5	A	E433-71	<p><b>Select Voltage</b></p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-bottom: 5px;"></div> <p>▼</p> <div style="border: 1px solid black; padding: 5px;"> <p><b>120</b></p> <p><b>277</b></p> </div>	<p><b>Select Finish</b></p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-bottom: 5px;"></div> <p>▼</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 5%;"><b>PT</b>__</td> <td>Painted. (Include Paint Number.)</td> </tr> <tr> <td><b>PBR</b></td> <td>Polished solid brass</td> </tr> <tr> <td><b>BBR</b></td> <td>Brushed solid brass</td> </tr> <tr> <td><b>ABR</b></td> <td>Antique solid brass</td> </tr> <tr> <td><b>CPBR</b></td> <td>Chrome plated polished brass</td> </tr> <tr> <td><b>BAL</b></td> <td>Brushed aluminum</td> </tr> <tr> <td><b>ABST</b></td> <td>Antique brass over steel</td> </tr> <tr> <td><b>BBST</b></td> <td>Brushed brass over steel</td> </tr> <tr> <td><b>CPST</b></td> <td>Polished chrome over steel</td> </tr> <tr> <td><b>PBST</b></td> <td>Polished brass over steel</td> </tr> </tbody> </table> <p><i>See Finish Selection Guide, pages 268-269.</i></p>	<b>PT</b> __	Painted. (Include Paint Number.)	<b>PBR</b>	Polished solid brass	<b>BBR</b>	Brushed solid brass	<b>ABR</b>	Antique solid brass	<b>CPBR</b>	Chrome plated polished brass	<b>BAL</b>	Brushed aluminum	<b>ABST</b>	Antique brass over steel	<b>BBST</b>	Brushed brass over steel	<b>CPST</b>	Polished chrome over steel	<b>PBST</b>	Polished brass over steel	<p><b>Select Options</b></p> <div style="border: 1px solid black; width: 100px; height: 20px; margin-bottom: 5px;"></div> <p>▼</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tbody> <tr> <td style="width: 5%;"><b>OAH</b>__</td> <td>Pendant length other than standard. (Provide fixture height in inches.)</td> </tr> <tr> <td><b>F</b></td> <td>Fuse option</td> </tr> <tr> <td><b>EMR</b></td> <td>Emergency ballast(s) remote</td> </tr> <tr> <td><b>SBA</b></td> <td>Sandblasted acrylic</td> </tr> <tr> <td><b>SAJ</b></td> <td>Contemporary ballast canopy</td> </tr> <tr> <td><b>SS</b></td> <td>Separate switching</td> </tr> <tr> <td><b>HP01</b></td> <td>Silver hand-painted acrylic</td> </tr> <tr> <td><b>HP02</b></td> <td>Beige hand-painted acrylic</td> </tr> <tr> <td><b>HP03</b></td> <td>Amber hand-painted acrylic</td> </tr> <tr> <td><b>FIN</b></td> <td>Finial option</td> </tr> </tbody> </table> <div style="text-align: center; margin-top: 10px;">  <p>Stepped</p> </div> <p><i>For further detail on options, see Technical Notes on page 264.</i></p>	<b>OAH</b> __	Pendant length other than standard. (Provide fixture height in inches.)	<b>F</b>	Fuse option	<b>EMR</b>	Emergency ballast(s) remote	<b>SBA</b>	Sandblasted acrylic	<b>SAJ</b>	Contemporary ballast canopy	<b>SS</b>	Separate switching	<b>HP01</b>	Silver hand-painted acrylic	<b>HP02</b>	Beige hand-painted acrylic	<b>HP03</b>	Amber hand-painted acrylic	<b>FIN</b>	Finial option
	Lamping Detail (indirect - bowl illumination)	Optical Pkg.	Photometry																																																									
<b>2F27 / 1F22</b>	(2) FT27W/2G11 - 22W CIRC T5	A	E433-71																																																									
<b>2F39 / 1F22</b>	(2) FT39W/2G11 - 22W CIRC T5	A	E433-71																																																									
<b>2F39DM / 1F22</b>	(2) FT39W/2G11 - 22W CIRC T5	A	E433-71																																																									
<b>PT</b> __	Painted. (Include Paint Number.)																																																											
<b>PBR</b>	Polished solid brass																																																											
<b>BBR</b>	Brushed solid brass																																																											
<b>ABR</b>	Antique solid brass																																																											
<b>CPBR</b>	Chrome plated polished brass																																																											
<b>BAL</b>	Brushed aluminum																																																											
<b>ABST</b>	Antique brass over steel																																																											
<b>BBST</b>	Brushed brass over steel																																																											
<b>CPST</b>	Polished chrome over steel																																																											
<b>PBST</b>	Polished brass over steel																																																											
<b>OAH</b> __	Pendant length other than standard. (Provide fixture height in inches.)																																																											
<b>F</b>	Fuse option																																																											
<b>EMR</b>	Emergency ballast(s) remote																																																											
<b>SBA</b>	Sandblasted acrylic																																																											
<b>SAJ</b>	Contemporary ballast canopy																																																											
<b>SS</b>	Separate switching																																																											
<b>HP01</b>	Silver hand-painted acrylic																																																											
<b>HP02</b>	Beige hand-painted acrylic																																																											
<b>HP03</b>	Amber hand-painted acrylic																																																											
<b>FIN</b>	Finial option																																																											

**OPTICAL PACKAGES**

**A**  
Symmetrical Indirect

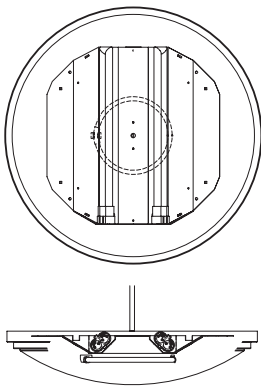


# Shallow Pendants-32"


RENAISSANCE

# 32"


## Stepped Trim




RIP1404



RIP1420



RIP1412



RIP1428

### Specifications:

- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- Ballasts are thermally protected and have Class "A" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.



**A**  
Symmetrical  
Indirect

**B**  
Wide  
Indirect

Sample model number: **RIP1404** - **6F39/1F22** - **120** - **BAL** - **HP02**

**Select Style**

**Select any Lamping**  
(indirect/bowl illumination)

**Select Voltage**

**Select Finish**

**Select Options**

**RIP1404**

**RIP1412**

**RIP1420**

**RIP1428**

	Lamping Detail (indirect - bowl illumination)	Optical Pkg.	Photometry
<b>6F40 / 1F40<sup>1</sup></b>	(6) FT40W/2G11 - 40W CIRC T5	A	E433-87
<b>6F55 / 1F40<sup>1</sup></b>	(6) FT55W/2G11 - 40W CIRC T5	A	E433-87
<b>6F39 / 1F22<sup>1</sup></b>	(6) FT39W/2G11 - 22W CIRC T5	B	NA
<b>6F39DM / 1F22<sup>1</sup></b>	(6) FT39W/2G11 - 22W CIRC T5	B	NA
<b>3F39-3F40 / 1F22<sup>1</sup></b>	(3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5	B	NA
<b>3F39DM-3F40DM / 1F22</b>	(3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5	B	NA
<b>3F39-3F55 / 1F22</b>	(3) FT39W/2G11 - (3) FT55W/2G11 - 22W CIRC T5	B	NA

**DM** = Dimming ballast(s) provided

<sup>1</sup>Denotes lamping options available with **EMI**


**120**

**277**

<b>PT</b>	Painted. (Include Paint Number.)
<b>PBR</b>	Polished solid brass
<b>BBR</b>	Brushed solid brass
<b>ABR</b>	Antique solid brass
<b>CPBR</b>	Chrome plated polished brass
<b>BAL</b>	Brushed aluminum
<b>ABST</b>	Antique brass over steel
<b>BBST</b>	Brushed brass over steel
<b>CPST</b>	Polished chrome over steel
<b>PBST</b>	Polished brass over steel

*See Finish Selection Guide, pages 268-269.*

<b>OAH</b>	Pendant length other than standard. (Provide fixture height in inches.)
<b>F</b>	Fuse option
<b>EMI<sup>1</sup></b>	Emergency ballast(s) integral
<b>EMR</b>	Emergency ballast(s) remote
<b>SBA</b>	Sandblasted acrylic
<b>SAJ</b>	Contemporary ballast canopy
<b>SS</b>	Separate switching
<b>HP01</b>	Silver hand-painted acrylic
<b>HP02</b>	Beige hand-painted acrylic
<b>HP03</b>	Amber hand-painted acrylic
<b>FIN</b>	Finial option (standard with B optical package)




Stipped

*For further detail on options, see Technical Notes on page 264.*

## OPTICAL PACKAGES

**A**

Symmetrical Indirect

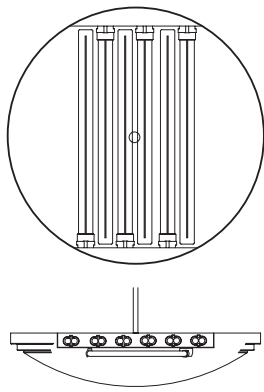

**B**

Wide Indirect

