

Shallow Arm Sconce & Ceiling



RIW1180
Brushed Aluminum

16" 24" 32"

Stepped Trim



RIC1080
Brushed Aluminum


Shallow Arm Sconce

RENAISSANCE


16"

24"

Stepped Trim

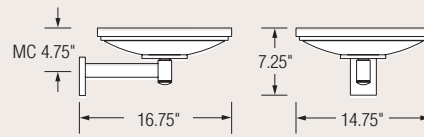

RIW1180

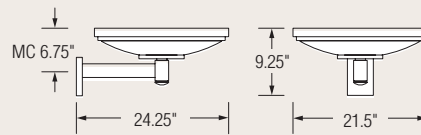


RIW1182

MC = Mounting Center

Specifications:

- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Hinged optical tray for easy replacement of lamps and ballasts without removal of the bowl.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- Ballasts are thermally protected and have Class "A" sound rating.
- Wall plate fits over standard junction box and is mounted to wall surface.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.



B
Symmetrical
Indirect

Sample model number: **RIW1182 - 2F39/1F22 - 120 - BAL - HP02**

	Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg.	Photometry	Select Voltage	Select Finish	Select Options
16"	RIW1180	1F22	22W CIRC T5	A	NA	120 277		
24"	RIW1182	2F39 / 1F22	(2) FT39W/2G11 - 22W CIRC T5	B	E433-71			
		2F39DM / 1F22	(2) FT39W/2G11 - 22W CIRC T5	B	E433-71			

PT__	Painted. (Include Paint Number.)
PBR	Polished solid brass
BBR	Brushed solid brass
ABR	Antique solid brass
CPBR	Chrome plated polished brass
BAL	Brushed aluminum
ABST	Antique brass over steel
BBST	Brushed brass over steel
CPST	Polished chrome over steel
PBST	Polished brass over steel

F	Fuse option
EMR	Emergency ballast(s) remote
SBA	Sandblasted acrylic
SS	Separate switching (Not available for RIW1180.)
HP01	Silver hand-painted acrylic
HP02	Beige hand-painted acrylic
HP03	Amber hand-painted acrylic

DM = Dimming ballast(s) provided


If Photometry is not available, consult factory for further details.

See Finish Selection Guide, pages 268-269.

For further detail on options, see Technical Notes on page 264.

OPTICAL PACKAGES

A

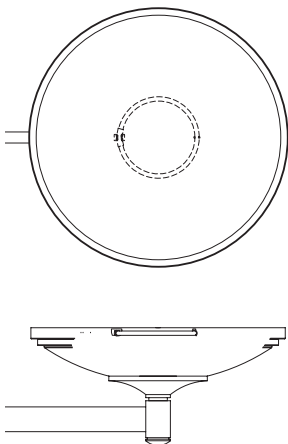

B

Symmetrical Indirect

