

# Swept Pendants



RIP1244  
Polished Brass

RIP1252  
Polished Brass

24" 32"

Traditional Trim



RIP1260  
Polished Brass



RIP1268  
Polished Brass

# Swept Pendants-24"

RENAISSANCE





# 24"

## Specifications:





- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- Ballasts are thermally protected and have Class "A" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)


Design modification rights reserved.

## Traditional Trim





## Bullnose Trim





**A**  
Symmetrical  
Indirect

Sample model number: **RIP1242 - 2F39/1F22 - 120 - BAL - HP02**

	Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg.	Photometry	Select Voltage	Select Finish	Select Options
TRADITIONAL	RIP1242	<b>2F27 / 1F22</b>	(2) FT27W/2G11 - 22W CIRC T5	A	E433-71	<b>120</b> <b>277</b>	<b>PT</b> Painted. (Include Paint Number.)	<b>OAH</b> Pendant length other than standard. (Provide fixture height in inches.) <b>F</b> Fuse option <b>EMR</b> Emergency ballast(s) remote <b>SBA</b> Sandblasted acrylic <b>SAJ</b> Contemporary ballast canopy <b>SAV</b> Traditional ballast canopy <b>SS</b> Separate switching <b>HP01</b> Silver hand-painted acrylic <b>HP02</b> Beige hand-painted acrylic <b>HP03</b> Amber hand-painted acrylic <b>FIN</b> Finial option
	RIP1250	<b>2F39 / 1F22</b>	(2) FT39W/2G11 - 22W CIRC T5	A	E433-71		<b>PBR</b> Polished solid brass	
	RIP1258	<b>2F39DM / 1F22</b>	(2) FT39W/2G11 - 22W CIRC T5	A	E433-71		<b>BBR</b> Brushed solid brass	
	RIP1266						<b>ABR</b> Antique solid brass	
	RIP1322						<b>CPBR</b> Chrome plated polished brass	
	RIP1330						<b>BAL</b> Brushed aluminum	
BULLNOSE	RIP1338					<b>ABST</b> Antique brass over steel	 Traditional  Bullnose	
	RIP1346					<b>BBST</b> Brushed brass over steel		
						<b>CPST</b> Polished chrome over steel		
						<b>PBST</b> Polished brass over steel		
						<i>See Finish Selection Guide, pages 268-269.</i>		


**DM** = Dimming ballast(s) provided

*For further detail on options, see Technical Notes on page 264.*

**OPTICAL PACKAGES**

**A**

Symmetrical Indirect

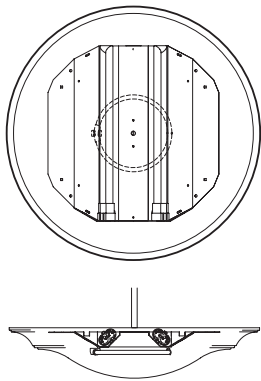

# Swept Pendants-32"

RENAISSANCE





# 32"

## Specifications:





- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- Ballasts are thermally protected and have Class "A" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)


Design modification rights reserved.

## Traditional Trim



## Bullnose Trim





**A**  
Symmetrical Indirect

**B**  
Wide Indirect

Sample model number: **STYLE** **LAMPING** **VOLTAGE** **FINISH** **OPTION**  
**RIP1244 - 6F55/1F40 - 120 - BAL - HP02**

**Select Style**

**Select any Lamping**  
(indirect/bowl illumination)

**Select Voltage**

**Select Finish**

**Select Options**

TRADITIONAL

BULLNOSE

Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg.	Photometry
RIP1244	6F40 / 1F40 <sup>1</sup>	(6) FT40W/2G11 - 40W CIRC T5	A	E433-87
RIP1252	6F40DM / 1F40 <sup>1</sup>	(6) FT40W/2G11 - 40W CIRC T5	A	E433-87
RIP1260	6F55 / 1F40 <sup>1</sup>	(6) FT55W/2G11 - 40W CIRC T5	A	E433-87
RIP1268	6F39 / 1F22 <sup>1</sup>	(6) FT39W/2G11 - 22W CIRC T5	B	NA
	3F39-3F40 / 1F22	(3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5	B	NA
RIP1324	3F39-3F55 / 1F22	(3) FT39W/2G11 - (3) FT55W/2G11 - 22W CIRC T5	B	NA
RIP1332	6F39DM / 1F22 <sup>1</sup>	(6) FT39W/2G11 - 22W CIRC T5	B	NA
RIP1340	6F40 / 1F22 <sup>1,2</sup>	(6) FT40W/2G11 - 22W CIRC T5	B	NA
RIP1348	6F55 / 1F22 <sup>2</sup>	(6) FT55W/2G11 - 22W CIRC T5	B	NA

DM = Dimming ballast(s) provided

<sup>1</sup>Denotes lamping options available with EMI

<sup>2</sup>This lamping option is only available with RIP1324, 1332, 1340 or 1348

*If Photometry is not available, consult factory for further details.*

120  
277

PT__	Painted. (Include Paint Number.)
PBR	Polished solid brass
BBR	Brushed solid brass
ABR	Antique solid brass
CPBR	Chrome plated polished brass
BAL	Brushed aluminum
ABST	Antique brass over steel
BBST	Brushed brass over steel
CPST	Polished chrome over steel
PBST	Polished brass over steel

**See Finish Selection Guide, pages 268-269.**

OAH__	Pendant length other than standard. (Provide fixture height in inches.)
F	Fuse option
EMI <sup>1</sup>	Emergency ballast(s) integral
EMR	Emergency ballast(s) remote
SBA	Sandblasted acrylic
SAJ	Contemporary ballast canopy
SAV	Traditional ballast canopy
SS	Separate switching
HP01	Silver hand-painted acrylic
HP02	Beige hand-painted acrylic
HP03	Amber hand-painted acrylic
FIN	Finial option (standard with B optical package)




**For further detail on options, see Technical Notes on page 264.**

**OPTICAL PACKAGES**

**A**

Symmetrical Indirect

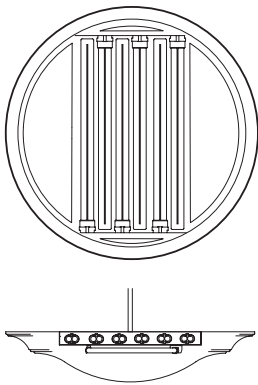

**B**

Wide Indirect

