

Swept Pendants



RIP1324
Polished Brass

RIP1340
Polished Brass

24" 32"

Bullnose Trim



RIP1332
Polished Brass



RIP1348
Polished Brass

Swept Pendants-24"

RENAISSANCE





24"

Specifications:





- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- Ballasts are thermally protected and have Class "A" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)


Design modification rights reserved.

Traditional Trim



Bullnose Trim






A
Symmetrical
Indirect


Sample model number: **RIP1242 - 2F39/1F22 - 120 - BAL - HP02**

Select Style		Select any Lamping (indirect/bowl illumination)		Select Voltage		Select Finish		Select Options		
TRADITIONAL	RIP1242	2F27 / 1F22	(2) FT27W/2G11 - 22W CIRC T5	A	E433-71	120 277	PT __	Painted. (Include Paint Number.)	OAH __	Pendant length other than standard. (Provide fixture height in inches.)
	RIP1250	2F39 / 1F22	(2) FT39W/2G11 - 22W CIRC T5	A	E433-71		PBR	Polished solid brass	F	Fuse option
	RIP1258	2F39DM / 1F22	(2) FT39W/2G11 - 22W CIRC T5	A	E433-71		BBR	Brushed solid brass	EMR	Emergency ballast(s) remote
	RIP1266						ABR	Antique solid brass	SBA	Sandblasted acrylic
	RIP1322						CPBR	Chrome plated polished brass	SAJ	Contemporary ballast canopy
	RIP1330						BAL	Brushed aluminum	SAV	Traditional ballast canopy
BULLNOSE	RIP1338					ABST	Antique brass over steel	SS	Separate switching	
	RIP1346					BBST	Brushed brass over steel	HP01	Silver hand-painted acrylic	
						CPST	Polished chrome over steel	HP02	Beige hand-painted acrylic	
						PBST	Polished brass over steel	HP03	Amber hand-painted acrylic	
						<i>See Finish Selection Guide, pages 268-269.</i>		FIN		Finial option

DM = Dimming ballast(s) provided



Traditional




Bullnose

For further detail on options, see Technical Notes on page 264.

OPTICAL PACKAGES

A
Symmetrical Indirect

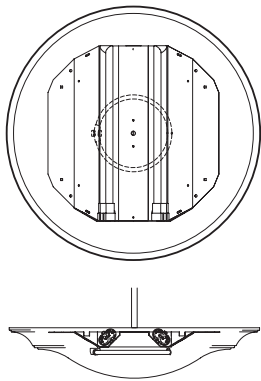

Swept Pendants-32"

RENAISSANCE





32"

Specifications:





- Trim rings are spun from .063" thick base material (brass or aluminum) or 18 gauge steel (plated or painted).
- Chassis is formed from 18 gauge cold-rolled steel.
- 3/8 IP (.688" dia.) stem.
- Formed acrylic bowl with a minimum wall thickness of .118". Opal finish is standard.
- Integral fluorescent ballasts are HPF electronic with low harmonic distortion.
- Ballasts are thermally protected and have Class "A" sound rating.
- Inner steel support bracket attaches to 4" octagonal box.
- 45° swivel canopy is standard and meets all earthquake related codes.
- UL listed (US and Canada) for damp locations. (Not recommended for exterior use.)

Design modification rights reserved.

Traditional Trim



Bullnose Trim





A
Symmetrical Indirect

B
Wide Indirect

Sample model number: **STYLE** **LAMPING** **VOLTAGE** **FINISH** **OPTION**
RIP1244 - 6F55/1F40 - 120 - BAL - HP02

Select Style

Select any Lamping
(indirect/bowl illumination)

Select Voltage

Select Finish

Select Options

TRADITIONAL

BULLNOSE

Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg.	Photometry
RIP1244	6F40 / 1F40¹	(6) FT40W/2G11 - 40W CIRC T5	A	E433-87
RIP1252	6F40DM / 1F40¹	(6) FT40W/2G11 - 40W CIRC T5	A	E433-87
RIP1260	6F55 / 1F40¹	(6) FT55W/2G11 - 40W CIRC T5	A	E433-87
RIP1268	6F39 / 1F22¹	(6) FT39W/2G11 - 22W CIRC T5	B	NA
	3F39-3F40 / 1F22	(3) FT39W/2G11 - (3) FT40W/2G11 - 22W CIRC T5	B	NA
RIP1324	3F39-3F55 / 1F22	(3) FT39W/2G11 - (3) FT55W/2G11 - 22W CIRC T5	B	NA
RIP1332	6F39DM / 1F22¹	(6) FT39W/2G11 - 22W CIRC T5	B	NA
RIP1340	6F40 / 1F22^{1,2}	(6) FT40W/2G11 - 22W CIRC T5	B	NA
RIP1348	6F55 / 1F22²	(6) FT55W/2G11 - 22W CIRC T5	B	NA

DM = Dimming ballast(s) provided

¹Denotes lamping options available with EMI

²This lamping option is only available with RIP1324, 1332, 1340 or 1348

If Photometry is not available, consult factory for further details.

120
277

PT __	Painted. (Include Paint Number.)
PBR	Polished solid brass
BBR	Brushed solid brass
ABR	Antique solid brass
CPBR	Chrome plated polished brass
BAL	Brushed aluminum
ABST	Antique brass over steel
BBST	Brushed brass over steel
CPST	Polished chrome over steel
PBST	Polished brass over steel

See Finish Selection Guide, pages 268-269.

OAH __	Pendant length other than standard. (Provide fixture height in inches.)
F	Fuse option
EMI ¹	Emergency ballast(s) integral
EMR	Emergency ballast(s) remote
SBA	Sandblasted acrylic
SAJ	Contemporary ballast canopy
SAV	Traditional ballast canopy
SS	Separate switching
HP01	Silver hand-painted acrylic
HP02	Beige hand-painted acrylic
HP03	Amber hand-painted acrylic
FIN	Finial option (standard with B optical package)




For further detail on options, see Technical Notes on page 264.

OPTICAL PACKAGES

A

Symmetrical Indirect

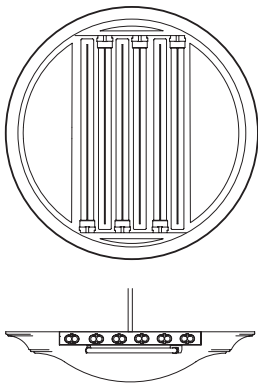

B

Wide Indirect

