


Sconce, Ceiling, Pier Mount



OIW1010
Painted White

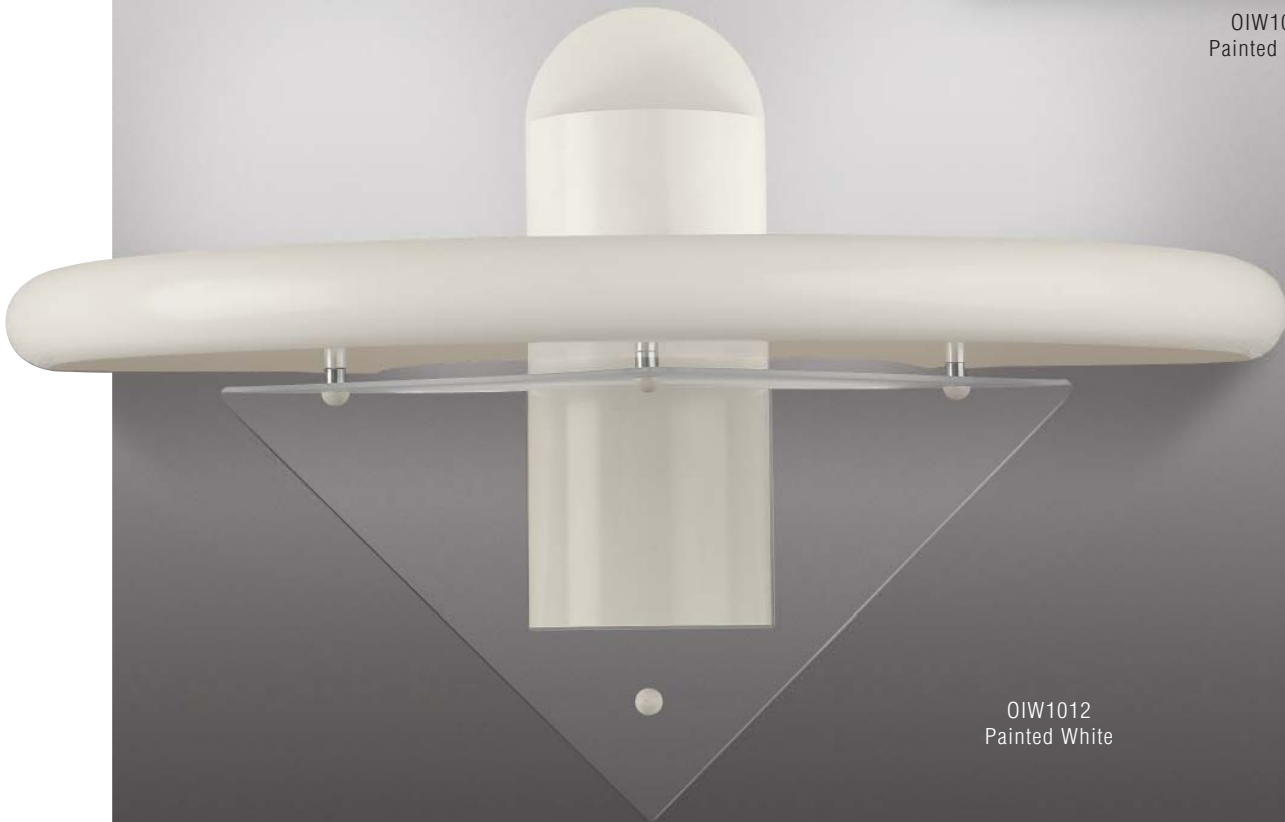

OIW1012
Painted White

20" 29"



OIPM1000
Painted White




OIC1010
Painted White


20"

29"

Round

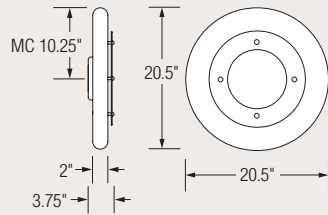


OIW1000
ADA

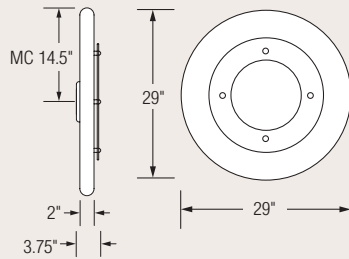


OIW1010
ADA

Triangular

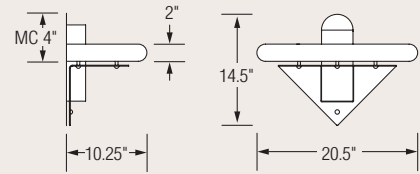

OIW1002

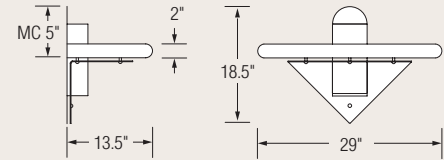

OIW1012

MC = Mounting Center

Specifications:

- Spun steel housing, 18 gauge formed cold-rolled steel chassis
- Standard shield is frosted acrylic
- Integral, HPF electronic ballast
- Ballast thermally protected
- Mounts to a standard 4" octagonal junction box.
- UL Listed for damp locations. (Not recommended for exterior use.)

Sample model number: **0IW1012 - 2F39 - 120 - PT17 - OP**


Select Style		Select any Lamping (indirect/bowl illumination)		Select Voltage		Select Finish		Select Options	
20"	0IW1000	1F21	(1) F21 2D	A	NA	120 277	PT__ Painted. (Include Paint Number.) <i>See Finish Selection Guide, pages 268-269.</i>	F Fuse option EMR Emergency ballast(s) remote OP Opal shield GN Green tint acrylic shield	<i>For further detail on options, see Technical Notes on page 265.</i>
20"	0IW1002	1F27	(1) FT27W/2G11	B	E433-78				
		1F39	(1) FT39W/2G11	B	E433-78				
29"	0IW1010	1F21	(1) F21 2D	A	NA				
29"	0IW1012	2F27	(2) FT27W/2G11	C	E433-79				
		2F39	(2) FT39W/2G11	C	E433-79				
		2F39DM	(2) FT39W/2G11	C	E433-79				
		2F40	(2) FT40W/2G11	C	E433-79				
		2F40DM	(2) FT40W/2G11	C	E433-79				
		2F50	(2) FT50W/2G11	C	E433-79				
		2F50DM		C	E433-79				
2F55		C	E433-79						

DM = Dimming ballast(s) provided


If Photometry is not available, consult factory for further details.

OPTICAL PACKAGES

A



B



C

