


# Sconce, Ceiling, Pier Mount



OIW1010  
Painted White

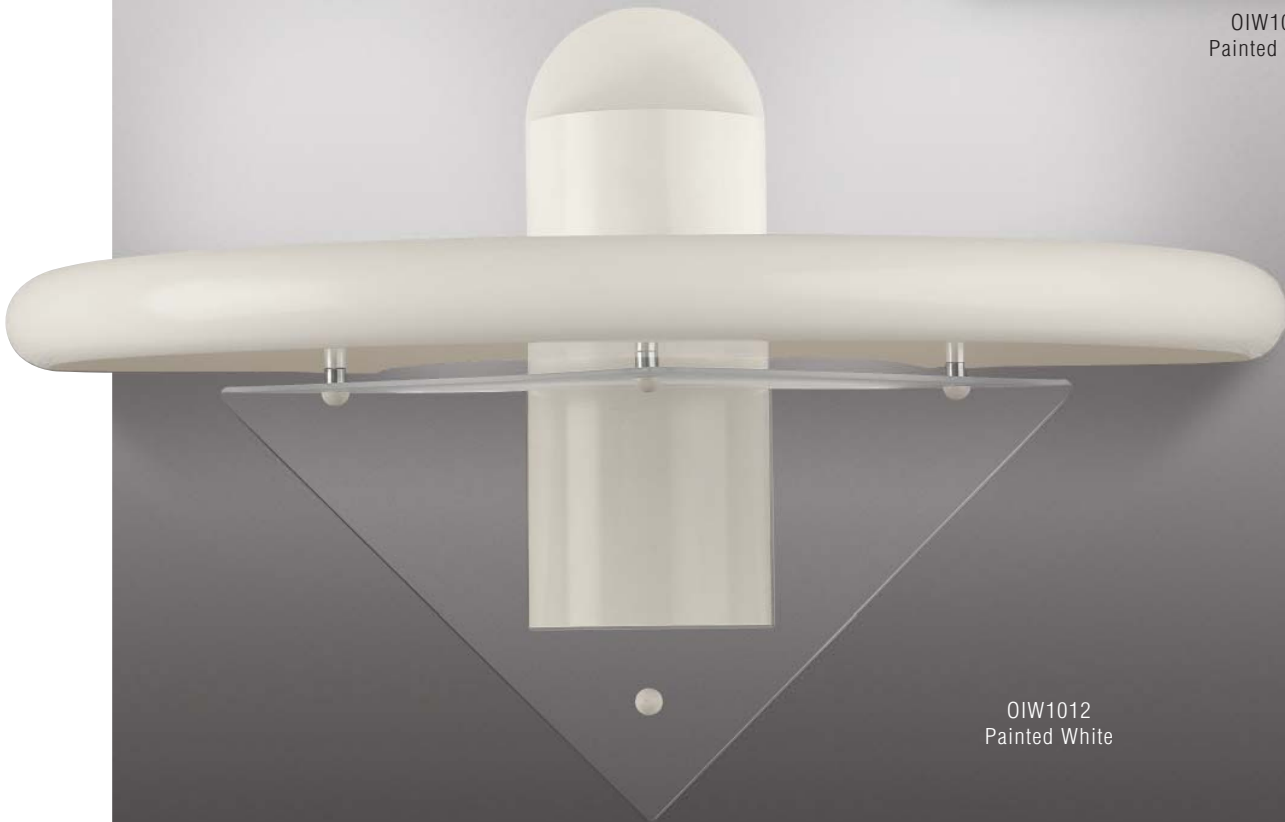

OIW1012  
Painted White

20" 29"



OIPM1000  
Painted White



OIC1010  
Painted White


# Ceiling

## OPTIONS

# 20"


# 29"

### Round




**OIC1000**

### Cone




**OIC1100**


### Dome




**OIC1200**



**OIC1010**



**OIC1110**



**OIC1210**

### Specifications:

- Spun steel housing, 18 gauge formed cold-rolled steel chassis
- Standard shield is frosted acrylic
- Integral, HPF electronic ballast
- Ballast thermally protected
- Base canopy mounts to a standard 4" octagonal junction box.
- UL Listed for damp locations. (Not recommended for exterior use.)

Sample model number: **OIC1000 - 1F21 - 120 - PT01 - OP**

	Select Style	Select any Lamping (indirect/bowl illumination)	Lamping Detail (indirect - bowl illumination)	Optical Pkg. Photometry	Select Voltage	Select Finish	Select Options								
20"	OIC1000 OIC1100 OIC1200	1F21	(1) F21 2D	A (1) F21 2D	120 277	PT__ Painted. (Include Paint Number.)  <i>See Finish Selection Guide, pages 268-269.</i>	<table border="1"> <tr> <td><b>F</b></td> <td>Fuse option</td> </tr> <tr> <td><b>EMR</b></td> <td>Emergency ballast(s) remote</td> </tr> <tr> <td><b>OP</b></td> <td>Opal shield</td> </tr> <tr> <td><b>GN</b></td> <td>Green tint acrylic shield</td> </tr> </table> <p><i>For further detail on options, see Technical Notes on page 265.</i></p>	<b>F</b>	Fuse option	<b>EMR</b>	Emergency ballast(s) remote	<b>OP</b>	Opal shield	<b>GN</b>	Green tint acrylic shield
<b>F</b>	Fuse option														
<b>EMR</b>	Emergency ballast(s) remote														
<b>OP</b>	Opal shield														
<b>GN</b>	Green tint acrylic shield														
29"	OIC1010 OIC1110 OIC1210	1F21	(1) F21 2D	A (1) F21 2D											

**OPTICAL PACKAGES**

**A**

