



Interior Ceiling Mount

Specifications:



- **Extruded** - Extruded .156" aluminum housing.
- **Solid** - Roll-formed .05" aluminum housing.
- **Perforated** - Roll-formed, perforated 18 gauge steel housing.
- Cast aluminum end caps with flush-mounted fasteners.
- Housing is field adjustable for application specific aiming and can be mechanically locked in the desired position.
- Yoke bracket is die-formed from 14 gauge steel.
- Hub utilize a cast aluminum square hub.
- Formed steel cover to fit over standard 4" junction box.
- The Ceiling Mount Kit utilizes a yoke bracket with a cover plate that mounts to a standard 4" junction box. Allows for 356° horizontal adjustability.
- H.I.D. luminaires utilize a segmented, 95% reflective, specular clear, aluminum reflector with an impact and heat-resistant, tempered glass lens.
- Fluorescent luminaires have a die-formed, 85% reflective, low-iridescent, specular aluminum reflector.
- Housing, endcaps, brackets and cover plates painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- H.I.D. ballasts are Integral, open core and coil, magnetic CWA-HPF design (multi-tap). Ballasts are thermally protected and have a Class "C" sound rating.
- Fluorescent luminaires utilize an integral, HPF electronic ballast with low harmonic distortion (<20%). Minimum starting temperature is 0° F. Ballasts are thermally protected and have a Class "A" sound rating.
- UL listed (U.S. and Canada) for damp locations. (Not for exterior use.)

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.



Yoke



Hub



Ceiling Mount Kit



FT	PW	VG	Lamp Wattage Range	Lamp
			32-110W	FL
			175-400W	MH
				TH

SELECT STYLE

Mounting Housing

SELECT LAMPING

Lamping Detail

SELECT OPTICAL PACKAGE

SELECT VOLTAGE

SELECT FINISH

SELECT OPTIONS

16"	EIC 3042	Yoke	Extruded	1F32 (1) 32W CFL Triple/GX24q 1F32DM (1) 32W CFL Triple/GX24q DM 1F42 (1) 42W CFL Triple/GX24q 1F42DM (1) 42W CFL Triple/GX24q DM	FT Forward Throw	120 277	PT Painted. (Include Paint Number) See SPI Finish Selection Guide on pages 168-169. Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.	CS Cut-off Shield. EMR Remote emergency lighting option. (fluorescent lamping) DCL Dust Cover Lens. (fluorescent lamping) EBL External Blade Louver. (fluorescent lamping) Q Standby Quartz Lamping. (metal halide lamping) F Fuse.
	EIC 3044	Yoke	Perforated					
	EIC 3046	Yoke	Solid					
	EIC 3048	Hub	Extruded					
	EIC 3050	Hub	Perforated					
	EIC 3052	Hub	Solid					
	EIC 3054	CM Kit	Extruded					
	EIC 3056	CM Kit	Perforated					
EIC 3058	CM Kit	Solid						
19"	EIC 3066	Yoke	Extruded	2F26 (2) 26W CFL Triple/GX24q 2F26DM (2) 32W CFL Triple/GX24q 2F32 (2) 32W CFL Triple/GX24q 2F32DM (2) 32W CFL Triple/GX24q DM 2F42 (2) 42W CFL Triple/GX24q 2F42DM (2) 42W CFL Triple/GX24q DM	FT Forward Throw	120 277	CS Cut-off Shield. EMR Remote emergency lighting option. (fluorescent lamping) DCL Dust Cover Lens. (fluorescent lamping) EBL External Blade Louver. (fluorescent lamping) Q Standby Quartz Lamping. (metal halide lamping) F Fuse.	
	EIC 3068	Yoke	Perforated					
	EIC 3070	Yoke	Solid					
	EIC 3072	Hub	Extruded					
	EIC 3074	Hub	Perforated					
	EIC 3076	Hub	Solid					
	EIC 3078	CM Kit	Extruded					
	EIC 3080	CM Kit	Perforated					
EIC 3082	CM Kit	Solid						
27.5"	EIC 3090	Yoke	Extruded	1M175 (1) 175W ED17 MH - Medium 1M250 (1) 250W ET18 MH - Mogul 1M400 (1) 400W ET18 MH - Mogul 1M250PS (1) 250W T15 Pulse Start MH - Mogul 1M400PS (1) 400W T15 Pulse Start MH - Mogul	FT Forward Throw PW Plane Wash	120 277	CS Cut-off Shield. EMR Remote emergency lighting option. (fluorescent lamping) DCL Dust Cover Lens. (fluorescent lamping) EBL External Blade Louver. (fluorescent lamping) Q Standby Quartz Lamping. (metal halide lamping) F Fuse.	
	EIC 3092	Hub						
	EIC 3098	Yoke	Extruded					
	EIC 3100	Yoke	Perforated					
	EIC 3102	Yoke	Solid					
27.5"	EIC 3104	Hub	Extruded	2F40 (2) 40W TT FL/2G11 2F40DM* (2) 40W TT FL/2G11 DM 2F50 (2) 50W TT FL/2G11 2F50DM* (2) 50W TT FL/2G11 DM 2F55 (2) 55W TT FL/2G11 2F55DM* (2) 55W TT FL/2G11 DM	FT Forward Throw	120 277	CS Cut-off Shield. EMR Remote emergency lighting option. (fluorescent lamping) DCL Dust Cover Lens. (fluorescent lamping) EBL External Blade Louver. (fluorescent lamping) Q Standby Quartz Lamping. (metal halide lamping) F Fuse.	
	EIC 3106	Hub	Perforated					
	EIC 3108	Hub	Solid					
	EIC 3104	Hub	Extruded					
	EIC 3106	Hub	Perforated					

* DCL option not available with this lamping.

For additional lamping details and options, see Technical Notes on pages 160-161.

Dimming ballast provides from 100% to 10% lumen output, <20%THD and start temperature of 10° C.

Reflections
Wall
Ceiling
Pendant

3.5
Wall
Ceiling
Pendant

5.0
Wall
Ceiling
Pendant
Pier
Cove
MRI
Shapes

6.0
Wall
Ceiling
Pendant
Pier
Cove
MRI

9.0
Wall
Ceiling
Pendant
Pier
Cove
MRI
Shapes



16.5
Wall
Pier
Pendant

Exterior



Lightruss

Interior Ceiling Mount

Yoke

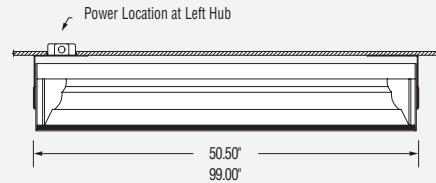

Hub

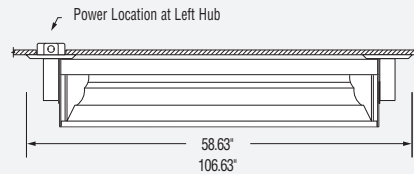

Specifications:

- **Extruded** - Extruded .156" aluminum housing.
- **Solid** - Roll-formed .05" aluminum housing.
- **Perforated** - Roll-formed, perforated 18 gauge steel housing.
- Cast aluminum end caps with flush-mounted fasteners.
- Housing is field adjustable for application specific aiming and can be mechanically locked in the desired position.
- Yoke bracket is a two-piece assembly, die-formed from 14 gauge steel.
- Hub utilize a cast aluminum square hub.
- Formed steel cover to fit over standard 4" junction box.
- Fluorescent luminaires have a die-formed, 85% reflective, low-iridescent, specular aluminum reflector.
- Housing, endcaps, brackets and cover plates painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- Fluorescent luminaires utilize an integral, HPF electronic ballast with low harmonic distortion (<20%). Minimum starting temperature is 0° F. Ballasts are thermally protected and have a Class "A" sound rating.
- UL listed (U.S. and Canada) for damp locations. (Not for exterior use.)

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.

FT	PW	VG	Lamp Wattage Range	Lamp
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	64-440W	FL
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		MH
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		TH

SELECT STYLE

	Mounting	Housing	
60.5"	EIC 3120	Yoke	Extruded
	EIC 3122	Hub	
89"	EIC 3128	Yoke	Extruded
	EIC 3130	Hub	

SELECT LAMPING

	Lamping Detail	
60.5"	2F32 (2) 32W T8 FL/T8 Med. Bipin	
	2F32DM (2) 32W T8 FL/T8 Med. Bipin DM	
	4F40 (4) 40W TT FL/2G11	
	4F40DM* (4) 40W TT FL/2G11 DM	
	4F50 (4) 50W TT FL/2G11	
	4F50DM* (4) 50W TT FL/2G11 DM	
	4F55 (4) 55W TT FL/2G11	
	4F55DM* (4) 55W TT FL/2G11 DM	
	89"	2F59 (2) 59W T8 FL/T8 Med. Bipin
		4F32 (4) 32W T8 FL/T8 Med. Bipin
4F32DM* (4) 32W T8 FL/T8 Med. Bipin DM		
8F40 (8) 40W TT FL/2G11		
8F40DM* (8) 40W TT FL/2G11 DM		
8F50 (8) 50W TT FL/2G11		
8F50DM* (8) 50W TT FL/2G11 DM		
8F55 (8) 55W TT FL/2G11		
8F55DM* (8) 55W TT FL/2G11 DM		

* DCL option not available with this lamping.
 For additional lamping details and options, see Technical Notes on pages 160-161.
 Dimming ballast provides from 100% to 10% lumen output, <20%THD and start temperature of 10° C.

SELECT OPTICAL PACKAGE

FT Forward Throw

SELECT VOLTAGE

120
277

See SPI Finish Selection Guide on pages 168-169.
 Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

SELECT FINISH

PT_ Painted. (Include Paint Number)

SELECT OPTIONS

CS	Cut-off Shield.
F	Fuse.
DCL	Dust Cover Lens.
EBL	External Blade Louver.
EMI	Integral emergency.
EMR	Remote emergency.

For further details on Options, see Technical Notes on page 165.

- Reflections Wall Ceiling Pendant
- 3.5 Wall Ceiling Pendant
- 5.0 Wall Ceiling Pendant Pier Cove MRI Shapes
- 6.0 Wall Ceiling Pendant Pier Cove MRI
- 9.0 Wall Ceiling Pendant Pier Cove MRI Shapes
- 16.5 Wall Pier Pendant
- Exterior
- Lightruss