

## Interior Wall Mount

### Specifications:

- **Extruded** - Extruded .125" aluminum housing.
- **Solid** - Roll-formed .05" aluminum housing.
- **Perforated** - Roll-formed, perforated 18 gauge steel housing.
- Cast aluminum end caps with flush-mounted fasteners.
- Housing is field adjustable for application specific aiming and can be mechanically locked in the desired position.
- H.I.D. luminaries utilize a segmented, 95% reflective, specular clear, aluminum reflector. Impact and heat-resistant, tempered glass lens.
- Fluorescent luminaries have a die-formed steel, 94% reflective, painted super white reflector.
- Yoke bracket is die-formed from 14 gauge steel.
- Hub and Horizontal Stem mountings utilize cast aluminum canopies. Horizontal Stem mount units include 1 1/2" square steel stems and square canopies. Hub mount supplied with round canopies.
- Cantilever Arm mount utilizes a yoke bracket with 1" dia. steel arm.
- Formed aluminum cover to fit over a standard 4" junction box.
- Housing, endcaps, brackets, cover plates and stems painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- Integral H.I.D. ballasts are open core and coil, magnetic CWA-HPF design (120/277 volt). Ballasts are thermally protected and have a Class "C" sound rating.
- Fluorescent luminaries utilize an integral, HPF electronic ballast with low harmonic distortion (<20%). Minimum starting temperature is 0° F. Ballasts are thermally protected and have a Class "A" sound rating.
- UL listed (U.S. and Canada) for damp locations. (Not for exterior use.)

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.


### Yoke




### Hub



### Horizontal Stem

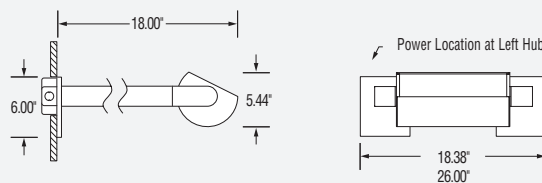

### Cantilever Arm

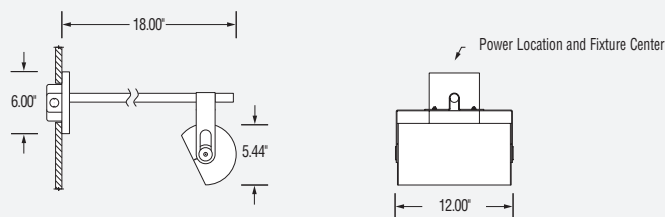

# ECHO 6.0

Integral Ballast

FT	PW	VG	Lamp Wattage Range	Lamp
			<b>26-78W</b>	<b>FL</b>
			<b>39-150W</b>	<b>MH</b>
				<b>TH</b>

**SELECT STYLE**

	Mounting	Housing
EIW 2024	Yoke	Extruded
EIW 2026	Yoke	Perforated
EIW 2028	Yoke	Solid
EIW 2030	Hub	Extruded
EIW 2032	Hub	Perforated
EIW 2034	Hub	Solid
EIW 2036	Horiz. Stem	Extruded
EIW 2038	Horiz. Stem	Perforated
EIW 2040	Horiz. Stem	Solid
EIW 2042	Cant. Arm	Extruded
EIW 2044	Cant. Arm	Perforated
EIW 2046	Cant. Arm	Solid
EIW 2048	Yoke	Extruded
EIW 2050	Yoke	Perforated
EIW 2052	Yoke	Solid
EIW 2054	Hub	Extruded
EIW 2056	Hub	Perforated
EIW 2058	Hub	Solid
EIW 2060	Horiz. Stem	Extruded
EIW 2062	Horiz. Stem	Perforated
EIW 2064	Horiz. Stem	Solid

**SELECT LAMPING**

Lamping Detail	
<b>1F26</b>	(1) 26W CFL Quad/G24q
<b>1F26DM</b>	(1) 26W CFL Quad/G24q DM
<b>1F27</b>	(1) 27W/2G11 TT
<b>1F39</b>	(1) 39W/2G11 TT
<b>1F39DM</b>	(1) 39W/2G11 TT DM
<b>2F39</b>	(2) 39W/2G11 TT
<b>2F39DM<sup>4</sup></b>	(2) 39W/2G11 TT DM
<b>1M39<sup>3</sup></b>	(1) 39W T6 CMH/G12
<b>1M70<sup>3</sup></b>	(1) 70W T6 CMH/G12
<b>1M150<sup>3</sup></b>	(1) 150W T6 CMH/G12

**SELECT OPTICAL PACKAGE**

<b>FT</b>	Forward Throw
<b>FT</b>	Forward Throw
<b>FT</b>	Forward Throw
<b>PW</b>	Plane Wash
<b>VG</b>	Vertical Graze

**SELECT VOLTAGE**

<b>120</b>
<b>277</b>

**SELECT FINISH**

<b>PT_</b>	Painted. (Include Paint Number)
------------	---------------------------------

See SPI Finish Selection Guide on pages 168-169.

Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

**SELECT OPTIONS**

<b>CS</b>	Cut-off Shield.
<b>RPI</b>	Remote ballast support tray. (metal halide lamping)
<b>DCL</b>	Dust Cover Lens. (fluorescent lamping)
<b>EBL</b>	External Blade Louver. (fluorescent lamping)
<b>EMR</b>	Remote Emergency. (fluorescent lamping)
<b>F</b>	Fuse.

For further details on Options, see Technical Notes on page 165.

<sup>3</sup> Only available in extruded housing.

<sup>4</sup> DCL option not available with lamp offering.




For additional lamping details and options, see Technical Notes on pages 160-161.

Dimming ballast provides from 100% to 10% lumen output, <20%THD and start temperature of 10° C.



- Reflections Wall Ceiling Pendant
- 3.5 Wall Ceiling Pendant
- 5.0 Wall Ceiling Pendant Pier Cove MRI Shapes
- 6.0 Wall Ceiling Pendant Pier Cove MRI
- 9.0 Wall Ceiling Pendant Pier Cove MRI Shapes
- 16.5 Wall Pier Pendant
- Exterior
- Lightruss

## Interior Wall Mount



### Yoke

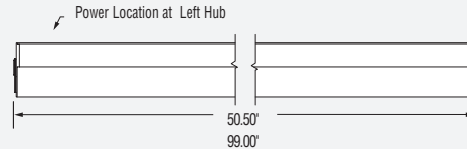

### Hub



### Horizontal Stem



#### Specifications:

- **Extruded** - Extruded .125" aluminum housing.
- **Solid** - Roll-formed .05" aluminum housing.
- **Perforated** - Roll-formed, perforated 18 gauge steel housing.
- Cast aluminum end caps with flush-mounted fasteners.
- Housing is field adjustable for application specific aiming and can be mechanically locked in the desired position.
- Fluorescent luminaires have a die-formed steel, 94% reflective, painted super white reflector.
- Yoke bracket is die-formed from 14 gauge steel. Luminaires over 27" in length have a two-piece yoke assembly.
- Hub and Horizontal Stem mountings utilize cast aluminum canopies. Horizontal Stem mount units include 1 1/2" square steel stems and square canopies. Hub mount supplied with round canopies.
- Formed aluminum cover to fit over a standard 4" junction box.
- Housing, endcaps, brackets, cover plates and stems painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- Fluorescent luminaires utilize an integral, HPF electronic ballast with low harmonic distortion (<20%). Minimum starting temperature is 0° F. Ballasts are thermally protected and have a Class "A" sound rating.
- UL listed (U.S. and Canada) for damp locations. (Not for exterior use.)

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.

FT	PW	VG	Lamp Wattage Range	Lamp
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<b>32-220W</b>	<b>FL</b>
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		MH
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		TH

**SELECT STYLE**

	Mounting	Housing
EIW 2072	Yoke	Extruded
EIW 2074	Yoke	Perforated
EIW 2076	Yoke	Solid
EIW 2078	Hub	Extruded
EIW 2080	Hub	Perforated
EIW 2082	Hub	Solid
EIW 2084	Horiz. Stem	Extruded
EIW 2086	Horiz. Stem	Perforated
EIW 2088	Horiz. Stem	Solid

EIW 2096	Yoke	Extruded
EIW 2098	Hub	
EIW 2100	Horiz. Stem	

EIW 2102	Yoke	Extruded
EIW 2104	Hub	
EIW 2106	Horiz. Stem	

**SELECT LAMPING**

	Lamping Detail
1F40	(1) 40W TT FL/2G11
1F40DM	(1) 40W TT FL/2G11 DM
1F50	(1) 50W TT FL/2G11
1F50DM	(1) 50W TT FL/2G11 DM
1F55	(1) 55W TT FL/2G11
1F55DM	(1) 55W TT FL/2G11 DM
2F40	(2) 40W TT FL/2G11
2F40DM <sup>4</sup>	(2) 40W TT FL/2G11 DM
2F50	(2) 50W TT FL/2G11
2F50DM <sup>4</sup>	(2) 50W TT FL/2G11 DM
2F55	(2) 55W TT FL/2G11
2F55DM <sup>4</sup>	(2) 55W TT FL/2G11 DM

1F32	(1) 32W T8 FL/T8 Med. Bipin
1F32DM	(1) 32W T8 FL/T8 Med. Bipin DM
2F54	(2) 54W T5HO/T5 Mini Bipin
2F40	(2) 40W TT FL/2G11
2F40DM	(2) 40W TT FL/2G11 DM
2F50	(2) 50W TT FL/2G11
2F50DM	(2) 50W TT FL/2G11 DM
2F55	(2) 55W TT FL/2G11
2F55DM	(2) 55W TT FL/2G11 DM
4F40	(4) 40W TT FL/2G11
4F40DM <sup>4</sup>	(4) 40W TT FL/2G11 DM
4F50	(4) 50W TT FL/2G11
4F50DM <sup>4</sup>	(4) 50W TT FL/2G11 DM
4F55	(4) 55W TT FL/2G11
4F55DM <sup>4</sup>	(4) 55W TT FL/2G11 DM

1F59	(1) 59W T8 FL/T8 Med. Bipin
2F32	(2) 32W T8 FL/T8 Med. Bipin
2F32DM	(2) 32W T8 FL/T8 Med. Bipin DM
4F54	(4) 54W T5HO/T5 Mini Bipin

**SELECT OPTICAL PACKAGE**

FT Forward Throw

**SELECT VOLTAGE**

120  
 277

**SELECT FINISH**

PT\_ Painted. (Include Paint Number)

See SPI Finish Selection Guide on pages 168-169.

Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

**SELECT OPTIONS**

CS	Cut-off Shield.
F	Fuse.
DCL	Dust Cover Lens. (fluorescent lamping)
EBL	External Blade Louver. (fluorescent lamping)
EMI	Integral Emergency. Available for 50.6" and 99" fixtures.
EMR	Remote Emergency. Available for 26.5" fixtures.

For further details on Options, see Technical Notes on page 165.

26.5"

50.5"

99"

<sup>4</sup> DCL option not available with lamp offering.  
 For additional lamping details and options, see Technical Notes on pages 160-161.  
 Dimming ballast provides from 100% to 10% lumen output, <20%THD and start temperature of 10° C.

Reflections  
Wall  
Ceiling  
Pendant

3.5  
Wall  
Ceiling  
Pendant

5.0  
Wall  
Ceiling  
Pendant  
Pier  
Cove  
MRI  
Shapes

6.0  
Wall  
Ceiling  
Pendant  
Pier  
Cove  
MRI

9.0  
Wall  
Ceiling  
Pendant  
Pier  
Cove  
MRI  
Shapes

16.5  
Wall  
Pier  
Pendant

Exterior

Lightruss

© 1990-2006 SPI Lighting. Design modification rights reserved.

Tel 262.242.1420 Fax 262.242.6414 www.spilighting.com

45