



Interior Ceiling Mount

Specifications:



- **Extruded** - Extruded .125" aluminum housing.
- **Solid** - Roll-formed .05" aluminum housing.
- **Perforated** - Roll-formed, perforated 18 gauge steel housing.
- Cast aluminum end caps with flush-mounted fasteners.
- Housing is field adjustable for application specific aiming and can be mechanically locked in the desired position.
- H.I.D. luminaries utilize a segmented, 95% reflective, specular clear, aluminum reflector. Impact and heat-resistant, tempered glass lens.
- Fluorescent luminaries have a die-formed steel, 94% reflective, painted super white reflector.
- Yoke bracket is die-formed from 14 gauge steel.
- Hub mounting utilizes a cast aluminum hub.
- Formed aluminum cover is to fit over a standard 4" junction box.
- The Ceiling Mount Kit utilizes a yoke bracket with a cover plate that mounts directly to a standard 4" junction box. Allows for 356° horizontal adjustability.
- Housing, endcaps, brackets, and cover plates painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- Integral H.I.D. ballasts are open core and coil, magnetic CWA-HPF design (120/277 volt operation). Ballasts have a Class "C" sound rating.
- Fluorescent luminaries utilize an integral, HPF electronic ballast with low harmonic distortion (<20%). Minimum starting temperature is 0° F. Ballasts are thermally protected and have a Class "A" sound rating.
- UL listed (U.S. and Canada) for damp locations. (Not for exterior use.)

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.



Yoke



Hub



Ceiling Mount Kit



ECHO 6.0

Integral Ballast

FT	PW	VG	Lamp Wattage Range	Lamp
			26-78W	FL
			39-150W	MH
				TH

SELECT STYLE

	Mounting	Housing
EIC 2024	Yoke	Extruded
EIC 2026	Yoke	Perforated
EIC 2028	Yoke	Solid
EIC 2030	Hub	Extruded
EIC 2032	Hub	Perforated
EIC 2034	Hub	Solid
EIC 2036	CM Kit	Extruded
EIC 2038	CM Kit	Perforated
EIC 2040	CM Kit	Solid
EIC 2048	Yoke	Extruded
EIC 2050	Yoke	Perforated
EIC 2052	Yoke	Solid
EIC 2054	Hub	Extruded
EIC 2056	Hub	Perforated
EIC 2058	Hub	Solid
EIC 2060	CM Kit	Extruded
EIC 2062	CM Kit	Perforated
EIC 2064	CM Kit	Solid

SELECT LAMPING

Lamping Detail	
1F26	(1) CFQ 26W/G24q
1F26DM	(1) CFQ 26W/G24q DM
1F27	(1) 27W TT FL/2G11
1F39	(1) 39W TT FL/2G11
1F39DM	(1) 39W TT FL/2G11 DM
2F39	(2) 39W TT FL/2G11
2F39DM	(2) 39W TT FL/2G11 DM
1M39³	(1) 39W T6 CMH/G12
1M70³	(1) 70W T6 CMH/G12
1M150³	(1) 150W T6 CMH/G12

SELECT OPTICAL PACKAGE

FT	Forward Throw
FT	Forward Throw
FT	Forward Throw
PW	Plane Wash

SELECT VOLTAGE

120
277

SELECT FINISH

PT_	Painted. (Include Paint Number)
------------	---------------------------------

SELECT OPTIONS

CS	Cut-off Shield.
RPI	Remote ballast support tray. (metal halide lamping)
EMR	Remote emergency lighting. (fluorescent lamping)
DCL	Dust Cover Lens. (fluorescent lamping)
EBL	External Blade Louver. (fluorescent lamping)
F	Fuse.

See SPI Finish Selection Guide on pages 168-169.

Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

³ Only available in extruded housing.



For additional lamping details and options, see Technical Notes on pages 160-161.

Dimming ballast provides from 100% to 10% lumen output, <20%THD and start temperature of 10° C.



- Reflections
- Wall
- Ceiling
- Pendant
- 3.5 Wall Ceiling Pendant
- 5.0 Wall Ceiling Pendant Pier Cove MRI Shapes
- 6.0 Wall Ceiling Pendant Pier Cove MRI
- 9.0 Wall Ceiling Pendant Pier Cove MRI Shapes
- 16.5 Wall Pier Pendant
- Exterior
- Lightruss

Interior Ceiling Mount

Yoke

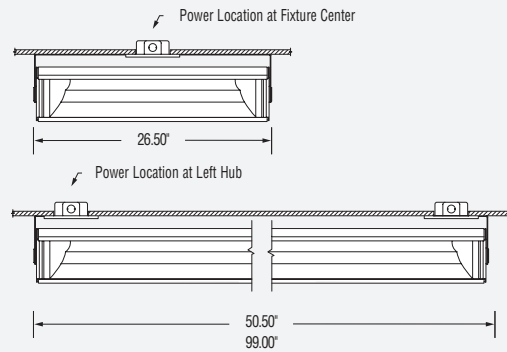

Hub

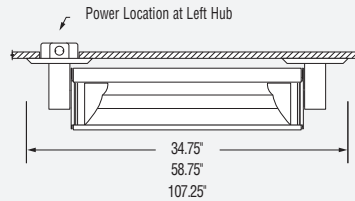

Specifications:

- **Extruded** - Extruded .125" aluminum housing.
- **Solid** - Roll-formed .05" aluminum housing.
- **Perforated** - Roll-formed, perforated 18 gauge steel housing.
- Cast aluminum end caps with flush-mounted fasteners.
- Housing is field adjustable for application specific aiming and can be mechanically locked in the desired position.
- Fluorescent luminaires have a die-formed steel, 94% reflective, painted super white reflector.
- Yoke bracket is die-formed from 14 gauge steel. Luminaires over 27" in length have a two-piece yoke assembly.
- Hub mounting utilizes a cast aluminum hub.
- Formed aluminum cover is provided to fit over a standard 4" junction box.
- Housing, endcaps, brackets, and cover plates painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- Fluorescent luminaires utilize an integral, HPF electronic ballast with low harmonic distortion (<20%). Minimum starting temperature is 0° F. Ballasts are thermally protected and have a Class "A" sound rating.
- UL listed (U.S. and Canada) for damp locations. (Not for exterior use.)

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.

FT	PW	VG	Lamp Wattage Range	Lamp
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	32-220W	FL
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		MH
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		TH

SELECT STYLE

	Mounting	Housing
EIC 2072	Yoke	Extruded
EIC 2074	Yoke	Perforated
EIC 2076	Yoke	Solid
EIC 2078	Hub	Extruded
EIC 2080	Hub	Perforated
EIC 2082	Hub	Solid

EIC 2096	Yoke	Extruded
EIC 2098	Hub	

EIC 2102	Yoke	Extruded
EIC 2104	Hub	

SELECT LAMPING

	Lamping Detail
1F40	(1) 40W TT FL/2G11
1F40DM	(1) 40W TT FL/2G11 DM
1F50	(1) 50W TT FL/2G11
1F50DM	(1) 50W TT FL/2G11 DM
1F55	(1) 55W TT FL/2G11
1F55DM	(1) 55W TT FL/2G11 DM
2F40	(2) 40W TT FL/2G11
2F40DM*	(2) 40W TT FL/2G11 DM
2F50	(2) 50W TT FL/2G11
2F50DM*	(2) 50W TT FL/2G11 DM
2F55	(2) 55W TT FL/2G11
2F55DM*	(2) 55W TT FL/2G11 DM

1F32	(1) 32W T8 FL/T8 Med. Bipin
1F32DM	(1) 32W T8 FL/T8 Med. Bipin DM
2F54	(2) 54W T5HQ/T5 Mini Bipin
2F40	(2) 40W TT FL /2G11
2F40DM	(2) 40W TT FL/2G11 DM
2F50	(2) 50W TT FL/2G11
2F50DM	(2) 50W TT FL/2G11 DM
2F55	(2) 55W TT FL/2G11
2F55DM	(2) 55W TT FL/2G11 DM
4F40	(4) 40W TT FL/2G11
4F40DM*	(4) 40W TT FL/2G11 DM
4F50	(4) 50W TT FL/2G11
4F50DM*	(4) 50W TT FL/2G11 DM
4F55	(4) 55W TT FL/2G11
4F55DM*	(4) 55W TT FL/2G11 DM

1F59	(1) 59W T8 FL /T8 Med. Bipin
2F32	(2) 32W T8 FL /T8 Med. Bipin
2F32DM	(2) 32W T8 FL /T8 Med. Bipin DM

SELECT OPTICAL PACKAGE

FT Forward Throw

SELECT VOLTAGE

120
277

SELECT FINISH

PT_ Painted. (Include Paint Number)

See SPI Finish Selection Guide on pages 168-169.

Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

SELECT OPTIONS

CS	Cut-off Shield.
F	Fuse.
DCL	Dust Cover Lens.
EBL	External Blade Louver.
EMI	Integral emergency. Available for 50.5 and 99" fixtures.
EMR	Remote emergency. Available for 26.5" fixtures.

For further details on Options, see Technical Notes on page 165.

* DCL options not available with this lamping.

For additional lamping details and options, see Technical Notes on pages 160-161.

Dimming ballast provides from 100% to 10% lumen output, <20%THD and start temperature of 10° C.

- Reflections
- Wall
- Ceiling
- Pendant
- 3.5
- Wall
- Ceiling
- Pendant
- 5.0
- Wall
- Ceiling
- Pendant
- Pier
- Cove
- MRI
- Shapes
- 6.0
- Wall
- Ceiling
- Pendant
- Pier
- Cove
- MRI
- 9.0
- Wall
- Ceiling
- Pendant
- Pier
- Cove
- MRI
- Shapes
- 16.5
- Wall
- Pier
- Pendant
- Exterior
- Lightruss