


Interior Wall Mount - Shapes

Remote Ballast

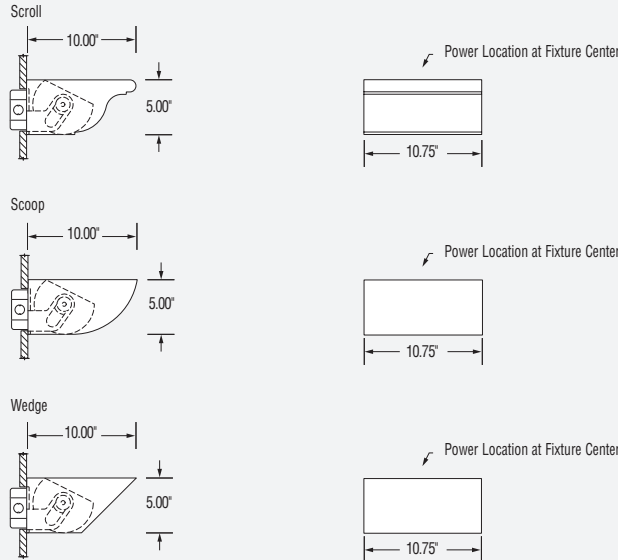


Specifications:

- The remote-ballasted Shapes™ have an outer housing die-formed from 18 gauge steel with an inner housing rolled-formed 20 gauge perforated steel with cast aluminum end caps.
- The integrally-ballasted Shapes™ have an 18 gauge, die-formed outer housing. The inner housing is roll-formed 20 gauge perforated steel with cast aluminum endcaps.
- Housing is field adjustable for application specific aiming and can be mechanically locked in the desired position.
- H.I.D. and Tungsten Halogen luminaires utilize a segmented, 95% reflective, specular clear, aluminum reflector. Impact and heat-resistant, tempered pattern 62 glass lens.
- H.I.D. ballasts are remote, encased and potted, magnetic CWA-HPF design (120/277 volt operation). Ballasts are thermally protected and have a Class "B" sound rating.
- Power Tray™ integral ballast is a dual-tap 120/277 volt, open core and coil magnetic ballast with all components installed on a tray, pre-wired with quick-connect plugs for ease of installation and maintenance. Ballast is thermally protected and has a Class "C" sound rating.
- The shroud and inner housing are painted to match.
- Shapes™ is surface-mounted over a standard 4" junction box.
- Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- UL listed (U.S. and Canada) for damp locations. (Not for exterior use.)

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.


Power Tray - Integral Ballast

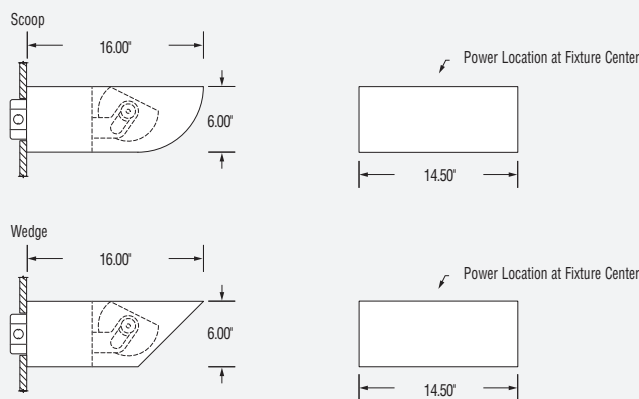

ECHO 5.0

Remote or Integral Ballast

FT	PW	VG	Lamp Wattage Range	Lamp
				FL
<input type="checkbox"/>			39-150W	MH
<input type="checkbox"/>			150-250W	TH



Remote Ballast

	Mounting	Housing
EIW 1520	Wall	Scroll
EIW 1522	Wall	Scoop
EIW 1524	Wall	Wedge

10.5

	Lamping Detail
1M39	(1) 39W T6 CMH/G12
1M70	(1) 70W T6 CMH/G12
1M150	(1) 150W T6 CMH/G12
1T150²	(1) 150W T4 DC BAY QTZ
1T250²	(1) 250W T4 DC BAY QTZ

FT Forward Throw

120
277

PT Painted. (Include Paint Number)

See SPI Finish Selection Guide on pages 168-169.

Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

RPI	Remote ballast support tray. (metal halide lamping)
F	Fuse. (metal halide lamping)

For further details on Options, see Technical Notes on page 164.

Integral Ballast

	Mounting	Housing
EIW 1530	Wall	Scoop
EIW 1532	Wall	Wedge

14.5

	Lamping Detail
1M39	(1) 39W T6 CMH/G12
1M70	(1) 70W T6 CMH/G12
1M150	(1) 150W T6 CMH/G12

² 120 volt only.

For additional lamping details and options, see Technical Notes on pages 160-161.

Reflections
Wall
Ceiling
Pendant

3.5
Wall
Ceiling
Pendant

5.0
Wall
Ceiling
Pendant
Pier
Cove
MRI
Shapes

6.0
Wall
Ceiling
Pendant
Pier
Cove
MRI

9.0
Wall
Ceiling
Pendant
Pier
Cove
MRI
Shapes

16.5
Wall
Pier
Pendant

Exterior

Lightruss