

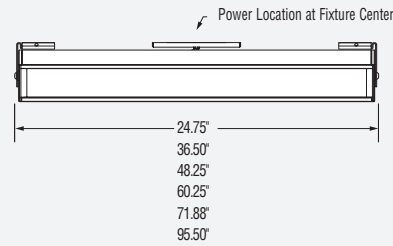



## Interior Ceiling Mount

### Bracket

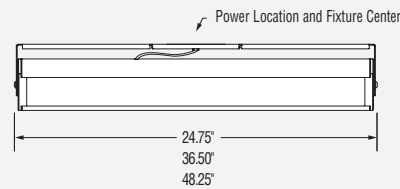

### Yoke



### Specifications:

- **Extruded** - Extruded .094" aluminum housing.
- Cast aluminum end caps and steel mounting brackets.
- Aluminum cover to fit over a standard 4" junction box.
- Stainless steel exterior fasteners.
- Housing is field adjustable for application specific aiming and can be mechanically locked in the desired position.
- 95% premium reflective aluminum reflector.
- Housings, endcaps, brackets and cover plates painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- Integral ballasts are HPF electronic with low harmonic distortion (<20%).
- Minimum starting temperature is 0°F. Ballasts are thermally protected and have a Class "A" sound rating.
- UL listed (US and Canada) for damp locations. (Not for exterior use).

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.

# ECHO 3.5

Integral Ballast

FT	PW	VG	Lamp Wattage Range	Lamp
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	14-108W	FL
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		MH
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		TH

**SELECT STYLE**

Mounting	Housing
<b>EIC 1002</b> Bracket	Extruded
<b>EIC 1004</b> Yoke	
<b>EIC 1008</b> Bracket	Extruded
<b>EIC 1010</b> Yoke	
<b>EIC 1014</b> Bracket	Extruded
<b>EIC 1020</b> Yoke	
<b>EIC 1026</b> Bracket	Extruded
<b>EIC 1032</b> Bracket	Extruded
<b>EIC 1038</b> Bracket	Extruded

**SELECT LAMPING**

Lamping Detail	
<b>1F14</b> (1) 14W T5 FL/T5 Mini Bipin	
<b>1F24</b> (1) 24W T5HO FL/T5 Mini Bipin	
<b>1F24DM</b> (1) 24W T5HO FL/T5 Mini Bipin DM	
<b>1F21</b> (1) 21W T5 FL/T5 Mini Bipin	
<b>1F39</b> (1) 39W T5HO FL/T5 Mini Bipin	
<b>1F39DM</b> (1) 39W T5HO FL/T5 Mini Bipin DM	
<b>1F28</b> (1) 28W T5 FL/T5 Mini Bipin	
<b>1F28DM</b> (1) 28W T5 FL/T5 Mini Bipin DM	
<b>1F54</b> (1) 54W T5HO FL/T5 Mini Bipin	
<b>1F54DM</b> (1) 54W T5HO FL/T5 Mini Bipin DM	
<b>1F35</b> (1) 35W T5 FL/T5 Mini Bipin	
<b>1F80<sup>1</sup></b> (1) 80W T5HO FL/T5 Mini Bipin	
<b>2F21</b> (2) 21W T5 FL/T5 Mini Bipin	
<b>2F39</b> (2) 39W T5HO FL/T5 Mini Bipin	
<b>2F39DM</b> (2) 39W T5HO FL/T5 Mini Bipin DM	
<b>2F28</b> (2) 28W T5 FL/T5 Mini Bipin	
<b>2F28DM</b> (2) 28W T5 FL/T5 Mini Bipin DM	
<b>2F54</b> (2) 54W T5HO FL/T5 Mini Bipin	

**SELECT OPTICAL PACKAGE**

**FT** Forward Throw

**SELECT VOLTAGE**

**120**  
**277**

**SELECT FINISH**

**PT\_** Painted. (Include Paint Number)

See SPI Finish Selection Guide on pages 168-169.

Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

**SELECT OPTIONS**

<b>IBL</b>	Internal Blade Louver. Cannot be used with <b>DCL</b> .
<b>DCL</b>	Dust Cover Lens. Cannot be used with <b>IBL</b> .
<b>F</b>	Fusing.
<b>EMR</b>	Remote Emergency. Available for 24" and 36" fixtures.
<b>EMI</b>	Integral Emergency. Available for 48", 60", 72" and 96" fixtures.
<b>CM</b>	Optional mounting hardware to install yoke fixtures in lay-in ceiling applications.

For further details on Options, see Technical Notes on page 163.

<sup>1</sup> Not available with emergency ballasts.

For additional lamping details and options, see Technical Notes on pages 160-161.

Dimming ballast provides from 100% to 10% lumen output, <20%THD and start temperature of 10° C.

Reflections  
Wall  
Ceiling  
Pendant

**3.5**  
Wall  
Ceiling  
Pendant

**5.0**  
Wall  
Ceiling  
Pendant  
Pier  
Cove  
MRI  
Shapes

**6.0**  
Wall  
Ceiling  
Pendant  
Pier  
Cove  
MRI

**9.0**  
Wall  
Ceiling  
Pendant  
Pier  
Cove  
MRI  
Shapes

**16.5**  
Wall  
Pier  
Pendant

Exterior

Lightruss