



Exterior Wall Mount

Hub

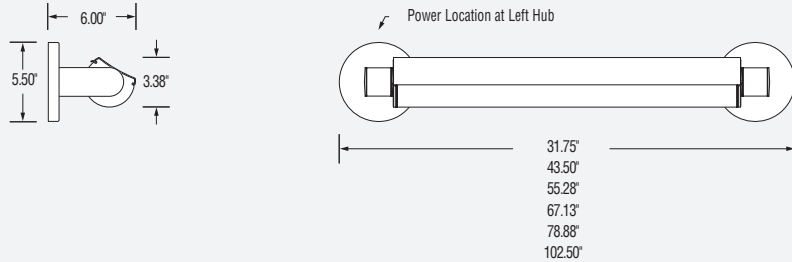

Horizontal Stem

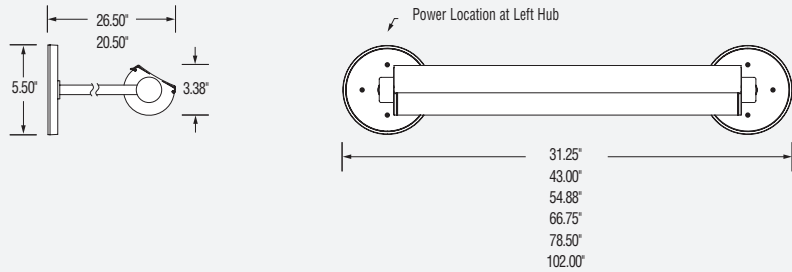


Specifications:

- **Extruded** - Extruded .094" aluminum housing.
- Cast aluminum mounting hubs and brackets.
- Horizontal stem mount units include (2) 5/8" dia. stainless steel mounting stems.
- Formed aluminum cover to fit over a standard 4" junction box.
- Stainless steel exterior fasteners.
- Housing is field adjustable for application specific aiming and can be mechanically locked in the desired position.
- 95% premium reflective aluminum reflector.
- Snap tight acrylic lens with gasketing.
- Housings, endcaps, brackets and cover plates painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- Integral ballasts are HPF electronic with low harmonic distortion (<20%).
- Minimum starting temperature is 0° F. Ballasts are thermally protected and have a Class "A" sound rating.
- UL listed (US and Canada) for wet locations.

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.

Continuous Row

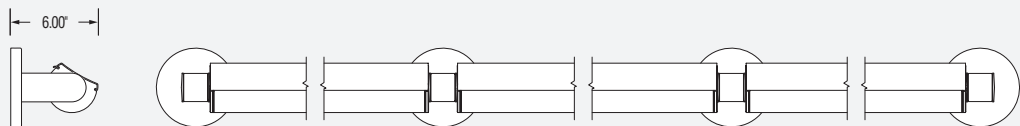

Please Consult Factory.

Note: Each section of the Continuous Row fixture is available in any combination of the following lengths; 2', 3', 4', 5', 6' and 8'.

ECHO 3.5

Integral Ballast

FT	PW	VG	Lamp Wattage Range	Lamp
<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	14-108W	FL
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		MH
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>		TH

SELECT STYLE

Mounting Housing

24°	EEW 1002	Hub	Extruded
	EEW 1004	Horiz. Stem	
36°	EEW 1010	Hub	Extruded
	EEW 1012	Horiz. Stem	
48°	EEW 1018	Hub	Extruded
	EEW 1020	Horiz. Stem	
60°	EEW 1026	Hub	Extruded
	EEW 1028	Horiz. Stem	
72°	EEW 1032	Hub	Extruded
	EEW 1034	Horiz. Stem	
96°	EEW 1038	Hub	Extruded
	EEW 1040	Horiz. Stem	

SELECT LAMPING

Lamping Detail

1F14	(1) 14W T5 FL/T5 Mini Bipin
	1F24 (1) 24W T5HO FL/T5 Mini Bipin
1F21	(1) 21W T5 FL/T5 Mini Bipin
	1F39 (1) 39W T5HO FL/T5 Mini Bipin
1F28	(1) 28W T5 FL/T5 Mini Bipin
	1F54 (1) 54W T5HO FL/T5 Mini Bipin
1F35	(1) 35W T5 FL/T5 Mini Bipin
	1F80 (1) 80W T5HO FL/T5 Mini Bipin
2F21	(2) 21W T5 FL/T5 Mini Bipin
	2F39 (2) 39W T5HO FL/T5 Mini Bipin
2F28	(2) 28W T5 FL/T5 Mini Bipin
	2F54 (2) 54W T5HO FL/T5 Mini Bipin

For additional lamping details and options, see Technical Notes on pages 160-161.

SELECT OPTICAL PACKAGE

FT Forward Throw

SELECT VOLTAGE

120
277

See SPI Finish Selection Guide on pages 168-169.

Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

SELECT FINISH

PT Painted. (Include Paint Number)

For further details on Options, see Technical Notes on page 163.

SELECT OPTIONS

IBL Internal Blade Louver.

- Reflections
- Wall
- Ceiling
- Pendant
- 3.5
- Wall
- Ceiling
- Pendant
- 5.0
- Wall
- Ceiling
- Pendant
- Pier
- Cove
- MRI
- Shapes
- 6.0
- Wall
- Ceiling
- Pendant
- Pier
- Cove
- MRI
- 9.0
- Wall
- Ceiling
- Pendant
- Pier
- Cove
- MRI
- Shapes
- 16.5
- Wall
- Pier
- Pendant

