



Interior Wall Mount


Remote Ballast

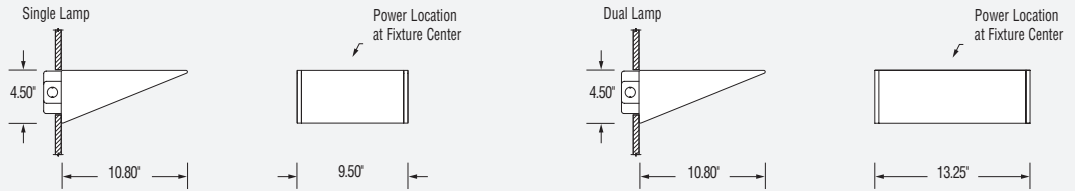

Integral Ballast

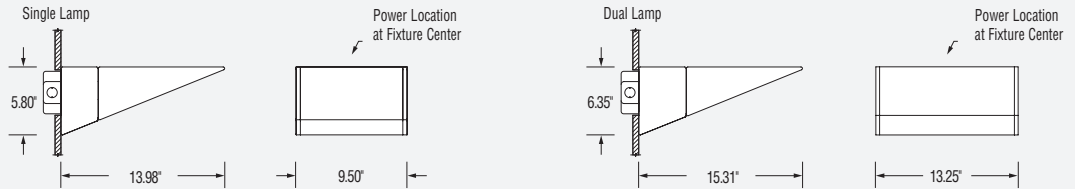

Adjustable Arm

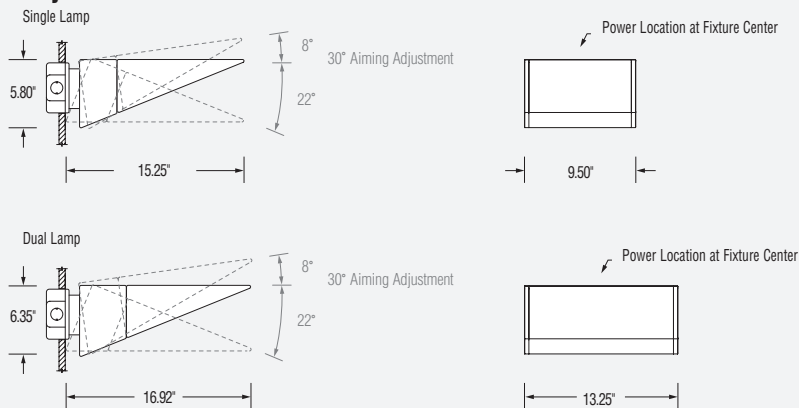

Specifications:

- **Extruded** - Extruded .188" aluminum housing.
- Cast aluminum end caps.
- Wall mount and adjustable arm units supplied with steel mounting bracket to fit over a standard 4" junction box. Simple three step installation.
- No visible fasteners.
- Adjustable arm mount allows for optical aiming from 22° below horizontal to 8° above horizontal.
- H.I.D. and Tungsten Halogen luminaires utilize a 95% premium reflective aluminum reflector. Impact and heat resistant tempered glass lens.
- Housings, endcaps, brackets and cover plates painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- Integral and remote ballasts are HPF electronic with low harmonic distortion (<15%). Ballasts are thermally protected and have Class "A" sound rating. Maximum remote mounting distance 50 feet.
- Metal Halide lamps are 4200°K.
- UL listed (US and Canada) for damp locations. (Not for exterior use).

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.

ECHO REFLECTIONS

Remote or Integral Ballast

FT	PW	VG	Lamp Wattage Range	Lamp
				FL
			39-300W	MH
			150-500W	TH

SELECT STYLE

SELECT LAMPING

SELECT OPTICAL PACKAGE

SELECT VOLTAGE

SELECT FINISH

SELECT OPTIONS

WALL MOUNT

Remote Ballast

	Mounting	Housing	Lamping Detail	
9.50'	EIW 5002	Wall	Extruded	1T150 (1) 150W T4 DC BAY QTZ
1T250 (1) 250W T4 DC BAY QTZ				
1M39 (1) 39W T6 CMH/G12				
1M70 (1) 70W T6 CMH/G12				
1M150 (1) 150W T6 CMH/G12				

FT	Forward Throw
PW	Plane Wash
VG	Vertical Graze

120
277

PT_ Painted. (Include Paint Number)

See SPI Finish Selection Guide on pages 168-169.

Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

MB⁶ Remote Magnetic Ballast.

F Fuse. (metal halide only)

For further details on Options, see Technical Notes on page 163.

⁶ Not available with EIW5004, EIW5012 or EIW5054.

13.25'	EIW 5010	Wall	Extruded	2T150 (2) 150W T4 DC BAY QTZ
2T250 (2) 250W T4 DC BAY QTZ				
2M150 (2) 150W T6 CMH/G12				

Integral Ballast

	Mounting	Housing	Lamping Detail	
9.50'	EIW 5004	Wall	Extruded	1M39 (1) 39W T6 CMH/G12
1M70 (1) 70W T6 CMH/G12				
1M150 (1) 150W T6 CMH/G12				

13.25'	EIW 5012	Wall	Extruded	2M150 (2) 150W T6 CMH/G12
--------	----------	------	----------	---------------------------

ADJUSTABLE ARM MOUNT

Remote Ballast

	Mounting	Housing	Lamping Detail	
9.50'	EIW 5052	Adj. Arm	Extruded	1T150 (1) 150W T4 DC BAY QTZ
1T250 (1) 250W T4 DC BAY QTZ				
1M39 (1) 39W T6 CMH/G12				
1M70 (1) 70W T6 CMH/G12				
1M150 (1) 150W T6 CMH/G12				

13.25'	EIW 5060	Adj. Arm	Extruded	2T150 (2) 150W T4 DC BAY QTZ
2T250 (2) 250W T4 DC BAY QTZ				
2M150 (2) 150W T6 CMH/G12				

Integral Ballast

	Mounting	Housing	Lamping Detail	
9.50'	EIW 5054	Adj. Arm	Extruded	1M39 (1) 39W T6 CMH/G12
1M70 (1) 70W T6 CMH/G12				
1M150 (1) 150W T6 CMH/G12				

For additional lamping details and options, see Technical Notes on pages 160-161.

Reflections
Wall
Ceiling
Pendant

3.5
Wall
Ceiling
Pendant

5.0
Wall
Ceiling
Pendant
Pier
Cove
MRI
Shapes

6.0
Wall
Ceiling
Pendant
Pier
Cove
MRI

9.0
Wall
Ceiling
Pendant
Pier
Cove
MRI
Shapes

16.5
Wall
Pier
Pendant

Exterior

Lightruss