
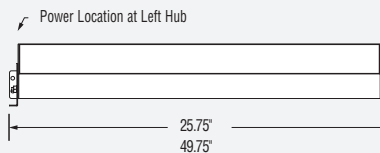


## Interior Cove Mount

### Cove



### Specifications:

- The housing is die-formed from 18 gauge perforated steel and can be mounted to horizontal or vertical surfaces.
- Pre-wired with 18" long, 1/2" O.D. flexible metal conduit, and insulated wire leads extend 6".
- Housing is field adjustable for application specific aiming and can be mechanically locked in the desired position.
- Fluorescent luminaries have a die-formed steel, 94% reflective, painted super white reflector.
- Fluorescent luminaries utilize an integral, HPF electronic ballast with low harmonic distortion (<20%). Minimum starting temperature is 0° F. Ballasts are thermally protected and have a Class "A" sound rating.
- Housing and brackets painted to match. Standard finish is thermoset polyester powder coat. All metal surfaces go through a 5-stage pretreatment process prior to powder coat application.
- UL listed (U.S. and Canada) for damp locations. (Not for exterior use.)

Assistance Available: Please see our website, or call 262-242-1420 for more specific product information, applications assistance or modification requests.

# ECHO 6.0

Integral Ballast

FT	PW	VG	Lamp Wattage Range	Lamp
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<b>32-110W</b>	<b>FL</b>
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		MH
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		TH

## SELECT STYLE

### Integral Ballast

Mounting	Housing
<input checked="" type="checkbox"/> EIV 2054	Cove Perforated

## SELECT LAMPING

Lamping Detail	
<b>1F40</b>	(1) 40W TT FL/2G11
<b>1F40DM</b>	(1) 40W TT FL/2G11 DM
<b>1F50</b>	(1) 50W TT FL/2G11
<b>1F50DM</b>	(1) 50W TT FL/2G11 DM
<b>1F55</b>	(1) 55W TT FL/2G11
<b>1F55DM</b>	(1) 55W TT FL/2G11 DM
<b>2F40</b>	(2) 40W TT FL/2G11
<b>2F40DM<sup>4</sup></b>	(2) 40W TT FL/2G11 DM
<b>2F50</b>	(2) 50W TT FL/2G11
<b>2F50DM<sup>4</sup></b>	(2) 50W TT FL/2G11 DM
<b>2F55</b>	(2) 55W TT FL/2G11
<b>2F55DM<sup>4</sup></b>	(2) 55W TT FL/2G11 DM

## SELECT OPTICAL PACKAGE

<input checked="" type="checkbox"/> FT	Forward Throw
--	---------------

## SELECT VOLTAGE

<input checked="" type="checkbox"/> 120	<input checked="" type="checkbox"/> 277
---	---

<input type="checkbox"/> PT_	Painted. (Include Paint Number)
------------------------------	---------------------------------

See SPI Finish Selection Guide on pages 168-169.

Other voltages/frequencies are available. For additional details and options, see Technical Notes on page 166 or consult factory for information.

## SELECT OPTIONS

<input type="checkbox"/> F	Fuse.
<input type="checkbox"/> DCL	Dust Cover Lens.
<input type="checkbox"/> EMI	Integral Emergency. (for 50" fixtures)
<input type="checkbox"/> EMR	Remote Emergency. (for 26" fixtures)

For further details on Options, see Technical Notes on page 165.

<input checked="" type="checkbox"/> EIV 2072	Cove Perforated
--	-----------------

<b>1F32</b>	(1) 32W T8 FL/T8 Med. Bipin
<b>1F32DM</b>	(1) 32W T8 FL/T8 Med. Bipin DM
<b>2F40</b>	(2) 40W TT FL/2G11
<b>2F40DM</b>	(2) 40W TT FL/2G11 DM
<b>2F50</b>	(2) 50W TT FL/2G11
<b>2F50DM</b>	(2) 50W TT FL/2G11 DM
<b>2F55</b>	(2) 55W TT FL/2G11
<b>2F55DM</b>	(2) 55W TT FL/2G11 DM
<b>4F40</b>	(4) 40W TT FL/2G11
<b>4F40DM<sup>4</sup></b>	(4) 40W TT FL/2G11 DM
<b>4F50</b>	(4) 50W TT FL/2G11
<b>4F50DM<sup>4</sup></b>	(4) 50W TT FL/2G11 DM
<b>4F55</b>	(4) 55W TT FL/2G11
<b>4F55DM<sup>4</sup></b>	(4) 55W TT FL/2G11 DM

<sup>4</sup> DCL option not available with lamp offering.

For additional lamping details and options, see Technical Notes on pages 160-161.

Dimming ballast provides from 100% to 10% lumen output, <20%THD and start temperature of 10° C.

Reflections  
Wall  
Ceiling  
Pendant

3.5  
Wall  
Ceiling  
Pendant

5.0  
Wall  
Ceiling  
Pendant  
Pier  
Cove  
MRI  
Shapes

6.0  
Wall  
Ceiling  
Pendant  
Pier  
Cove  
MRI

9.0  
Wall  
Ceiling  
Pendant  
Pier  
Cove  
MRI  
Shapes

16.5  
Wall  
Pier  
Pendant

Exterior

Lightruss