


TF 1030 W24 Waste Container w/ W24 Push-Door Top

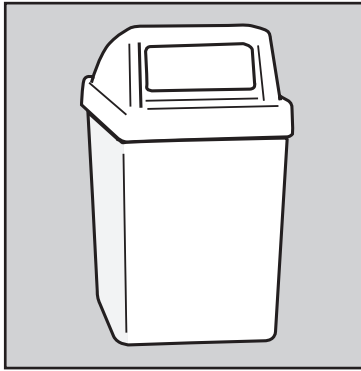

Options:

Note: Options may change without notice.
Call to confirm current options.

Exposed Aggregate:

Tan w/Gray Matrix - Misty Gray w/Gray

Weatherstone:

Sand - Gray - Brown - Buff - Cream
Light Charcoal - French Gray - Brick Red

Granitex

2078F, 4028F, 6208F, 1168F, 2098F

Glass

Clear - Emerald - Blue - Amber
Champaign - Charcoal

Custom Options Available

TF 1430 W24 Push-Door Top

Size: 25" Sq. x 13" H.
Weight: 12 lbs.
Material: Linear Low Density Polyethylene Plastic
Colors: Brown, Gray, Bronze, Red, Blue, green
Hardware: (2) - Security Cables
(4) - 1024 Hex head bolts
(4) - Shouldered screws
(4) - 1024 Washers
(4) - Shouldered allen bolts
Opening: 15 1/2" W x 61/2" H
Packaging: Shipped in carton
Maintenance: Clean with mild soap and water
Features: Made of recyclable plastic and is equipped with a self closing door.
Features 2: Plastic integrated with rodent repellent material.
Installation: Attach to container with security cables.

Size: 25" Sq. x 47" H.
Weight: 615 lbs.
Capacity: 53 gallons without liner; 45 gallons w/W24 liner
Material: Reinforced Concrete
Wall Thickness: 2" at top with 2% pitch
Hardware: (4) - 1/2" Dia. elevator bolts, inserted on site
(4) - 1/2" Dia. inserts
(2) - 5/8" Dia. lifting inserts
(2) - 1/4" Dia. zinc alloy inserts
Packaging: Palletized
Maintenance: Occasionally rinse with water & mild detergent
Re-seal annually
Anchoring: Optional
Logo Options: 16" Dia. x 1/4" Clear Lucite silk-screened with permanent inks. Installed with four tamper-proof rivets, or Custom Cast-in-Place logo.


TF 1305 Lg. Retainer Ring (Standard)

Size: 24" Sq.
Weight: 1 lb.
Material: Zinc plated steel
Features: Designed to hold "skirts" of polybag liner to container, out of view.


Packaging: In a carton
Installation: Place polybag in container with edges draped over sides. Set Ring on container rim, fold bag over ring into container.

TF 1640 Liner (Optional)


Size: 19-5/8" Sq. x 30-1/2" H
Wt: 13 lbs.
Cap: 45 gallons
Mat: Recycled Polyethylene Plastic
Color: Black

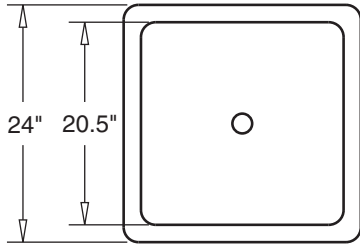

TOP VIEW

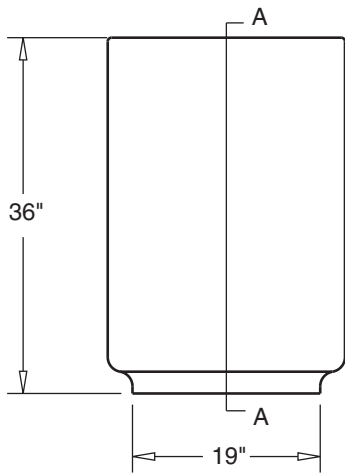

SIDE VIEW

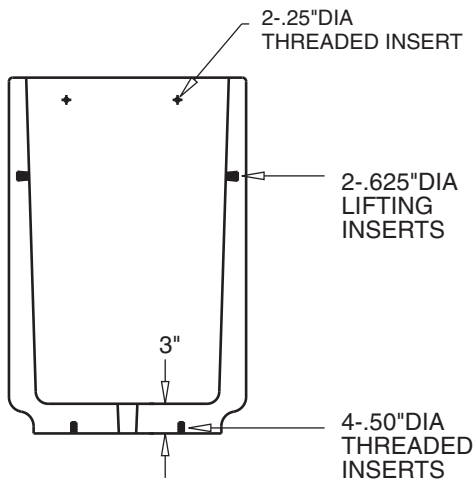

SECTION A-A

1.1 SUMMARY

- A. Section includes: Furnish Precast Concrete Waste Containers indicated on drawings or specified herein.

1.2 REFERENCES

- A. American Society for Testing & Materials
 1. ASTM C33
 2. ASTM C150
 3. ASTM C31

1.5 SUBMITTALS

- A. Submit product data, shop drawings and samples.
 1. Product Data: Manufacturer's specifications and technical data edited specifically for proposed system, including the following specific information:
 - a. Detailed specification of construction fabrication.
 - b. Manufacturer's installation instructions
 - c. Maintenance literature
 - d. Product warranty
 2. Shop Drawings: Indicate pertinent dimensions, general construction, component connections anchoring methods, hardware and installation procedures.
 3. Samples as requested by Architect.

1.6 QUALITY ASSURANCE

- A. Qualifications of Manufacturer: Manufacturer to be prequalified by specifier prior to bidding. Failure to comply will result in disqualification of bid. Manufacturer to have at least five years experience in the manufacturer of precast concrete waste containers field proven for at least five years.

1.10 WARRANTY

Manufacturer shall submit a written warranty for precast products for the period of two (2) years upon acceptance of products.

2.1 MANUFACTURERS

- A. Acceptable manufacturer for Precast Concrete Waste Containers to be known as:
Wausau Tile, Inc.

PO Box 1520, Wausau, WI 54402-1520.
(800) 388-8728 FAX (715) 355-4627

- B. Clarification Note: Drawings and installation specification are based on manufacturers proprietary literature from Wausau Tile, Inc. Other manufacturers shall comply with minimum levels of material and detailing indicated on drawings or specified herein.
- C. All Precast products for this project shall be of one manufacturer.

2.2 MATERIALS

- A. Portland Cement: ASTM C150 specifications for Portland Cement.
- B. Aggregates: All aggregates to meet ASTM C33 specifications, to be cleaned of foreign matter and properly graded to size.
- C. Coloring: Pigments used shall be inorganic, resistant to alkalinity and used as per manufacturers recommendations.

#