



Eyeleds® FloorLEDS Square




Features & Benefits:

- A new generation of indoor floor lighting, based on LED technology
- Easy to install and widely applicable with a recess depth of only 6,5mm
- Top quality SMD LED: bright and powerful light with an extreme long lifespan up to 100.000h
- Solid 'walk-over' construction, designed for loads up to 285kg
- Energy saving (0,6W per unit), UV resistant, IP67 dust proof and water resistant
- Low temperature, LED unit remains <35°C
- Individual LED units can easily be replaced with a special repair kit
- Approved and certified by German VDE test institute
- Installation possible in accordance with official standards
- 3 years of European Product Warranty

Materials & Dimensions LED unit:

- A: Light Surface: Polycarbonate lens 850°C - 22 x 22mm.
 B: Decoration Ring: Brushed Stainless Steel (1.4301/V2A/Inox 304) - 38 x 38mm.
 C: Trim Ring: Brushed Stainless Steel (1.4301/V2A/Inox 304) - 46 x 46mm.



System Components:

Fixture: LED Chain
 M 6,0 m

Available LED Chains:
 3L: HN6Y
 5L: HP6Y
 8L: HR6Y
 20L: HS6Y

Finish/LED Colour:
 0164U brushed stainless steel / white LED
 0Y84U brushed stainless steel / blue LED
 32209 brushed stainless steel / red LED
 01K4U brushed stainless steel / amber LED
 01J4U brushed brass / amber LED

Item Code Example: 5L chain br.stainless steel / White LED = HP6Y0164U

Built-In Power Supply
 AZ090001U 49 x 49 x 24mm
 MAX. 20 LED


Plug-In Power Supply Euro
 AZ170021U 88 x 52 x 26mm
 MAX. 5 LED

Plug-In Power Supply UK
 AZ210021U 78 x 52 x 26mm
 MAX. 5 LED





Extension Cable
 AZ150001U 6,0 m

T-Splitter
 AZ180001U 12cm


Connection Diagram:

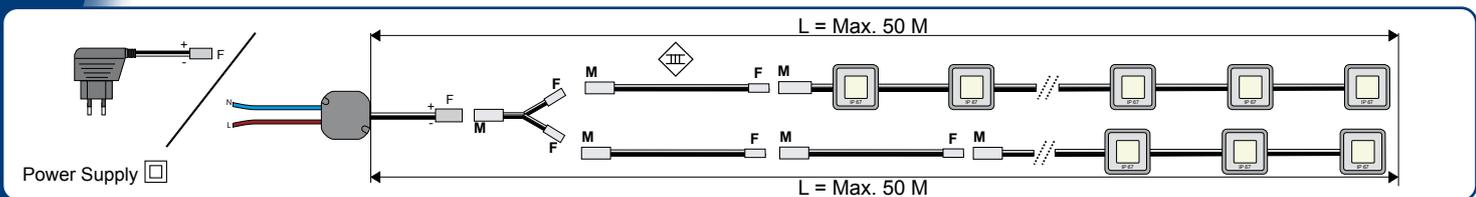

Build-In Diagram:



Bathroom Zones:

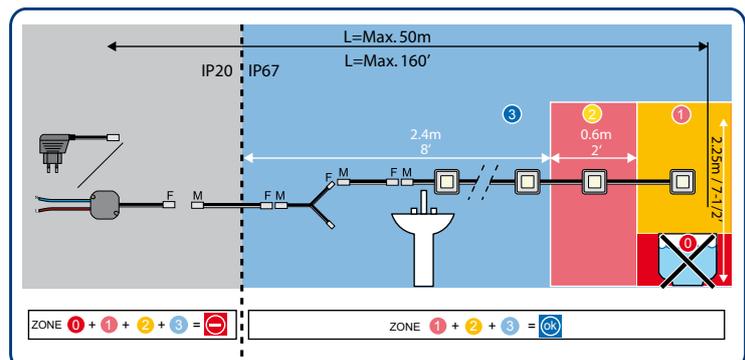

CE PRODUCTION ACC. ISO-9001 EN 05 PENDING

IP67 H₂O

Patented System

www.eyeleds.com