
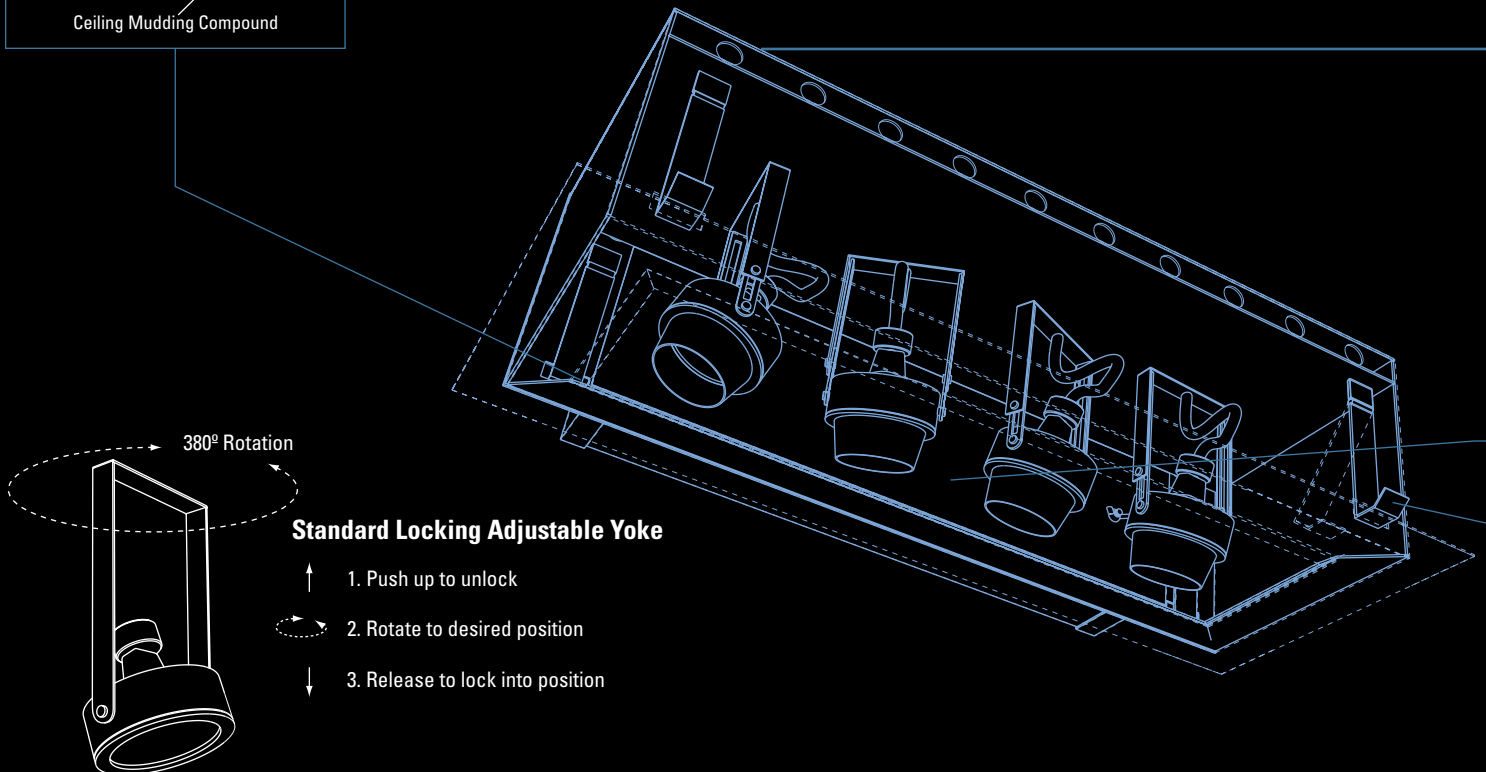


COMBOLIGHT CO Recessed Trimless Series

COMBOLIGHT® CO Series Recessed

Dual removable access doors provide ample room to reach transformers and electrical connections




Trimless Fixture

New Construction Housing

- Suitable for recessed new construction downlighting applications where multiple lamps from a single electrical connection is desired
- Fixture is comprised of sturdy steel construction with a durable powder coat finish inside and out
- Transformers and wiring are easily accessed from below the ceiling via removable access doors at each end of the housing
- Adjustable perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides a trimless ceiling opening
- Available with Magnetic or Electronic transformer with fuse and short circuit protection (low voltage models)

Remodel Housing

- Suitable for recessed remodel or retrofit downlighting applications where a multi-lamp, single electrical connection is desired
- Adjustable perforated mesh plaster frame can accommodate 5/8" ceiling thickness and provides a trimless ceiling opening
- Transformers and wiring are accessible via removable door on housing side wall
- Snap-in mounting system enables one of the fastest recessed fixture mounting times available
- All aluminum construction with durable powder coat inside and out

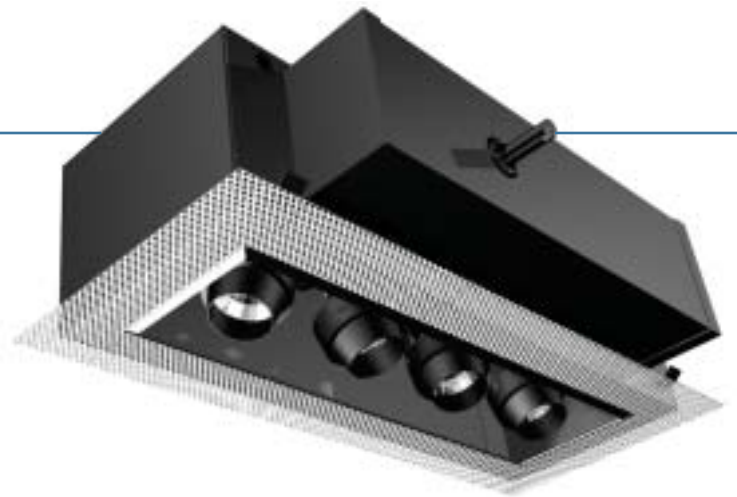

All Combolight CO Series fixtures are New York Calendar numbered. All Combolight CO Series fixtures are available with Chicago Plenum (specify "-CP").








C0114STR BK 35 RT MAG 120

Recessed Low Voltage MR11 Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box and Transformers located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations
- Low voltage models offered with magnetic transformer or electronic transformer with fuse and short circuit protection

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light Mag. Xfmr.	20.33"	5.21"	4.00"	6.75" x 6.77"
1 Light Elec. Xfmr.	20.33"	5.21"	4.00"	
2 Light Mag. Xfmr.	24.43"	5.21"	8.10"	10.85" x 6.77"
2 Light Elec. Xfmr.	24.43"	5.21"	8.10"	
3 Light Mag. Xfmr.	32.78"	5.21"	11.95"	14.70" x 6.77"
3 Light Elec. Xfmr.	28.28"	5.21"	11.95"	
4 Light Mag. Xfmr.	36.63"	5.21"	15.80"	18.55" x 6.77"
4 Light Elec. Xfmr.	32.13"	5.21"	15.80"	
5 Light Mag. Xfmr.	40.48"	5.21"	19.65"	22.40" x 6.77"
5 Light Elec. Xfmr.	35.98"	5.21"	19.65"	
6 Light Mag. Xfmr.	44.33"	5.21"	23.50"	26.25" x 6.77"
6 Light Elec. Xfmr.	39.83"	5.21"	23.50"	
4 Light Sq. Mag. Xfmr.	28.93"	5.21"	8.10"	10.85" x 10.62"
4 Light Sq. Elec. Xfmr.	24.43"	5.21"	8.10"	

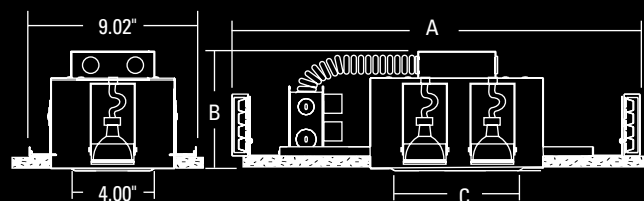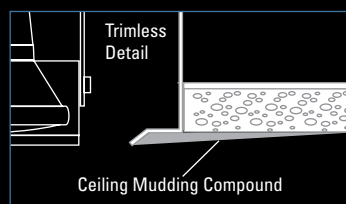

CO STANDARD TRIMLESS

Fixture Type	Catalog #	Description
FIXTURE TYPE	C0111STR	(1) One Light MR11
	C0112STR	(2) Two Light MR11
	C0113STR	(3) Three Light MR11
	C0114STR	(4) Four Light MR11
	C0115STR	(5) Five Light MR11
	C0106STR	(6) Six Light MR11
	C0114STRSQ	(4) Four Light Square MR11

Interior	Catalog #	Description
INTERIOR	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

Wattage	Catalog #	Description
WATTAGE	20	20 Watt MR11 Bi-Pin 12V
	35	35 Watt MR11 Bi-Pin 12V

Lamp Holder	Catalog #	Description
LAMP HOLDER	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

Transformer	Catalog #	Description
TRANSFORMER	ELC	Electronic Transformer
	MAG	Magnetic Transformer

Voltage	Catalog #	Description
VOLTAGE	120	120 Volt (Standard)
	277	277 Volt


Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

Fixture Type	Interior	Wattage	Lamp Holder	Transformer	Voltage
C0114STR	BK	35	YK	MAG	120

Four Light CO Series New Construction Trimless Fixture, Black Interior, MR11 35 Watt, Regular Yoke, Magnetic Transformer, 120 Volt

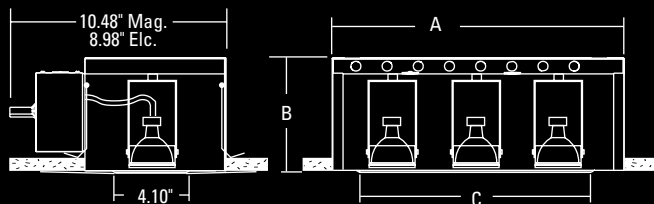

CO REMODEL TRIMLESS

1 FIXTURE TYPE	Catalog #	Description
	CO111STR-RMD	(1) One Light MR11 Remodel
	CO112STR-RMD	(2) Two Light MR11 Remodel
	CO113STR-RMD	(3) Three Light MR11 Remodel
	CO114STR-RMD	(4) Four Light MR11 Remodel
	CO115STR-RMD	(5) Five Light MR11 Remodel
	CO106STR-RMD	(6) Six Light MR11 Remodel
	CO114STRSQ-RMD	(4) Four Lt. Square MR11 Remodel

2 INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

3 WATTAGE	Catalog #	Description
	20	20 Watt MR11 Bi-Pin 12V
	35	35 Watt MR11 Bi-Pin 12V

4 LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

5 TRANSFORMER	Catalog #	Description
	ELC	Electronic Transformer

6 VOLTAGE	Catalog #	Description
	120	120 Volt (Standard)
	277	277 Volt

Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	WATTAGE	LAMP HOLDER	TRANSFORMER	VOLTAGE
CO114STR-RMD	BK	35	YK	MAG	120


Four Light CO Series Remodel Trimless Fixture, Black Interior, MR11 35 Watt, Regular Yoke, Magnetic Transformer, 120 Volt

Use only dimmers specifically designed for use with magnetic or electronic transformers. Low voltage fixtures using magnetic transformers may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Recessed Low Voltage MR11 Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and Transformers attached to fixture with easy below-ceiling access
- Offered with electronic transformer with fuse and short circuit protection
- Suitable for remodel / retrofit applications

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light Elec. Xfmr.	7.05"	5.01"	4.10"	7.18" x 7.18"
2 Light Elec. Xfmr.	11.45"	5.01"	8.50"	11.58" x 7.18"
3 Light Elec. Xfmr.	15.30"	5.01"	12.35"	15.43" x 7.18"
4 Light Elec. Xfmr.	19.15"	5.01"	16.20"	19.28" x 7.18"
5 Light Elec. Xfmr.	23.00"	5.01"	20.50"	23.25" x 7.18"
6 Light Elec. Xfmr.	26.85"	5.01"	23.90"	26.98" x 7.18"
4 Light Sq. Elec. Xfmr.	11.45"	5.01"	8.50" ²	11.55" x 11.55"

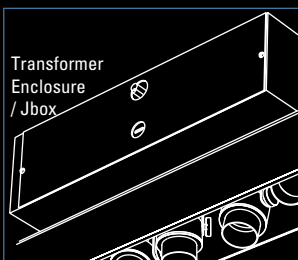

A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.








CO416STR BK 50 RT MAG 120 (Shown with Snoot Accessory)

Recessed Low Voltage MR16 Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box and Transformers located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations
- Low voltage models offered with magnetic transformer or electronic transformer with fuse and short circuit protection

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light Mag. Xfmr.	20.33"	5.21"	4.00"	6.75" x 6.77"
1 Light Elec. Xfmr.	20.33"	5.21"	4.00"	
2 Light Mag. Xfmr.	24.43"	5.21"	8.10"	10.85" x 6.77"
2 Light Elec. Xfmr.	24.43"	5.21"	8.10"	
3 Light Mag. Xfmr.	32.78"	5.21"	11.95"	14.70" x 6.77"
3 Light Elec. Xfmr.	28.28"	5.21"	11.95"	
4 Light Mag. Xfmr.	36.63"	5.21"	15.80"	18.55" x 6.77"
4 Light Elec. Xfmr.	32.13"	5.21"	15.80"	
5 Light Mag. Xfmr.	40.48"	5.21"	19.65"	22.40" x 6.77"
5 Light Elec. Xfmr.	35.98"	5.21"	19.65"	
6 Light Mag. Xfmr.	44.33"	5.21"	23.50"	26.25" x 6.77"
6 Light Elec. Xfmr.	39.83"	5.21"	23.50"	
4 Light Sq. Mag. Xfmr.	28.93"	5.21"	8.10"	10.85" x 10.62"
4 Light Sq. Elec. Xfmr.	24.43"	5.21"	8.10"	

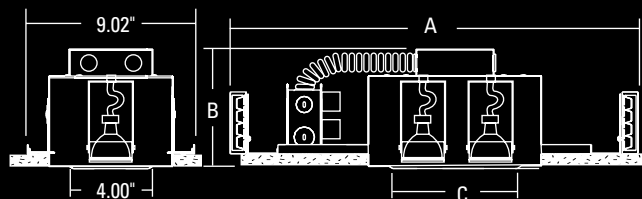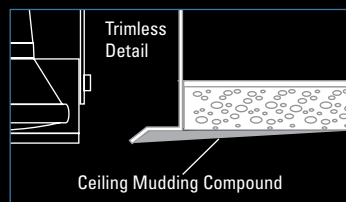


CO STANDARD TRIMLESS

1	FIXTURE TYPE	Catalog #	Description
		CO116STR	(1) One Light MR16
		CO216STR	(2) Two Light MR16
		CO316STR	(3) Three Light MR16
		CO416STR	(4) Four Light MR16
		CO516STR	(5) Five Light MR16
		CO616STR	(6) Six Light MR16
		CO416STRSQ	(4) Four Light Square MR16
2	INTERIOR	Catalog #	Description
		BK	Black
		WH	White
		S	Silver
		PT	Custom Color (Specify)
3	WATTAGE	Catalog #	Description
		50	50 Watt MR16 Bi-Pin 12V (Standard)
		75	75 Watt MR16 Bi-Pin 12V
4	LAMP HOLDER	Catalog #	Description
		YK	Regular Yoke (Standard)
		RT	Retractable Yoke
		DG	Double Gimbal
5	TRANSFORMER	Catalog #	Description
		ELC	Electronic Transformer
		MAG	Magnetic Transformer
6	VOLTAGE	Catalog #	Description
		120	120 Volt (Standard)
		277	277 Volt
Optional Accessories - See page 216 for details.			
	Baffle	Snoots	Louvers
			Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	WATTAGE	LAMP HOLDER	TRANSFORMER	VOLTAGE
CO416STR	BK	50	RT	MAG	120

Four Light CO Series New Construction Trimless Fixture, Black Interior, MR16 50 Watt, Retractable Yoke, Magnetic Transformer, 120 Volt

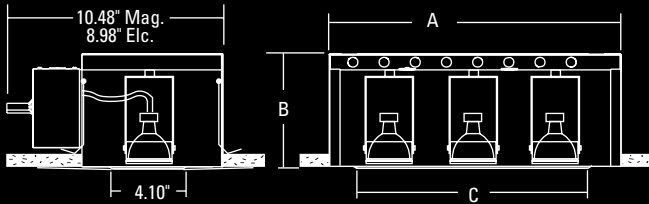

CO REMODEL TRIMLESS

FIXTURE TYPE	Catalog #	Description
	CO116STR-RMD	(1) One Light MR16 Remodel
	CO216STR-RMD	(2) Two Light MR16 Remodel
	CO316STR-RMD	(3) Three Light MR16 Remodel
	CO416STR-RMD	(4) Four Light MR16 Remodel
	CO516STR-RMD	(5) Five Light MR16 Remodel
	CO616STR-RMD	(6) Six Light MR16 Remodel
	CO416STRSQ-RMD	(4) Four Lt. Square MR16 Remodel

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

WATTAGE	Catalog #	Description
	50	50 Watt MR16 Bi-Pin 12V (Standard)
	75	75 Watt MR16 Bi-Pin 12V

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

TRANSFORMER	Catalog #	Description
	ELC	Electronic Transformer

VOLTAGE	Catalog #	Description
	120	120 Volt (Standard)
	277	277 Volt

Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	WATTAGE	LAMP HOLDER	TRANSFORMER	VOLTAGE
CO416STR-RMD	BK	50	RT	MAG	120


Four Light CO Series Remodel Trimless Fixture, Black Interior, MR16 50 Watt, Retractable Yoke, Magnetic Transformer, 120 Volt

Use only dimmers specifically designed for use with magnetic or electronic transformers. Low voltage fixtures using magnetic transformers may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Recessed Low Voltage MR16 Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and Transformers attached to fixture with easy below-ceiling access
- Offered with electronic transformer with fuse and short circuit protection
- Suitable for remodel / retrofit applications

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light Elc. Xfmr.	7.05"	5.01"	4.10"	7.18" x 7.18"
2 Light Elc. Xfmr.	11.45"	5.01"	8.50"	11.58" x 7.18"
3 Light Elc. Xfmr.	15.30"	5.01"	12.35"	15.43" x 7.18"
4 Light Elc. Xfmr.	19.15"	5.01"	16.20"	19.28" x 7.18"
5 Light Elc. Xfmr.	23.00"	5.01"	20.50"	23.25" x 7.18"
6 Light Elc. Xfmr.	26.85"	5.01"	23.90"	26.98" x 7.18"
4 Light Sq. Elc. Xfmr.	11.45"	5.01"	8.50" ²	11.55" x 11.55"

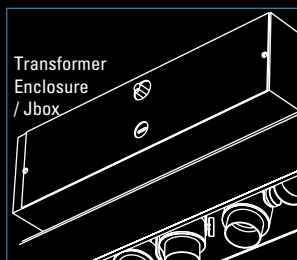

A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.








CO470STR WH 50 RT MAG 120

Recessed Low Voltage AR70 Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box and Transformers located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations
- Low voltage models offered with magnetic transformer or electronic transformer with fuse and short circuit protection

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light Mag. Xfmr.	20.33"	5.21"	4.00"	6.75" x 6.77"
1 Light Elec. Xfmr.	20.33"	5.21"	4.00"	
2 Light Mag. Xfmr.	24.43"	5.21"	8.10"	10.85" x 6.77"
2 Light Elec. Xfmr.	24.43"	5.21"	8.10"	
3 Light Mag. Xfmr.	32.78"	5.21"	11.95"	14.70" x 6.77"
3 Light Elec. Xfmr.	28.28"	5.21"	11.95"	
4 Light Mag. Xfmr.	36.63"	5.21"	15.80"	18.55" x 6.77"
4 Light Elec. Xfmr.	32.13"	5.21"	15.80"	
5 Light Mag. Xfmr.	40.48"	5.21"	19.65"	22.40" x 6.77"
5 Light Elec. Xfmr.	35.98"	5.21"	19.65"	
6 Light Mag. Xfmr.	44.33"	5.21"	23.50"	26.25" x 6.77"
6 Light Elec. Xfmr.	39.83"	5.21"	23.50"	
4 Light Sq. Mag. Xfmr.	28.93"	5.21"	8.10"	10.85" x 10.62"
4 Light Sq. Elec. Xfmr.	24.43"	5.21"	8.10"	

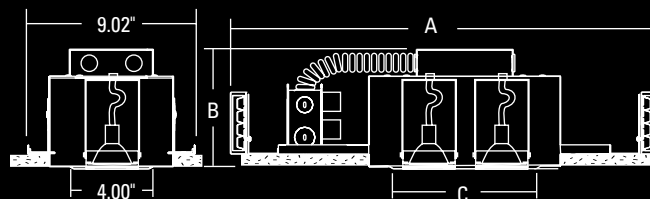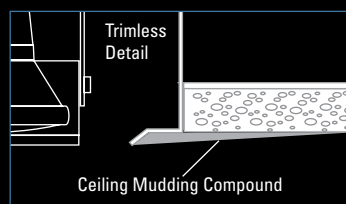

CO STANDARD TRIMLESS

Fixture Type	Catalog #	Description
1	CO170STR	(1) One Light AR70
	CO270STR	(2) Two Light AR70
	CO370STR	(3) Three Light AR70
	CO470STR	(4) Four Light AR70
	CO570STR	(5) Five Light AR70
2	CO670STR	(6) Six Light AR70
	CO470STRSQ	(4) Four Light Square AR70

Interior	Catalog #	Description
3	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

Wattage	Catalog #	Description
4	20	20 Watt AR70 Bayonet 12V
	50	50 Watt AR70 Bayonet 12V

Lamp Holder	Catalog #	Description
5	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

Transformer	Catalog #	Description
6	ELC	Electronic Transformer
	MAG	Magnetic Transformer

Voltage	Catalog #	Description
7	120	120 Volt (Standard)
	277	277 Volt


Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

Fixture Type	Interior	Wattage	Lamp Holder	Transformer	Voltage
CO470STR	WH	50	RT	MAG	120

Four Light CO Series New Construction Trimless Fixture, White Interior, AR70 50 Watt, Retractable Yoke, Magnetic Transformer, 120 Volt

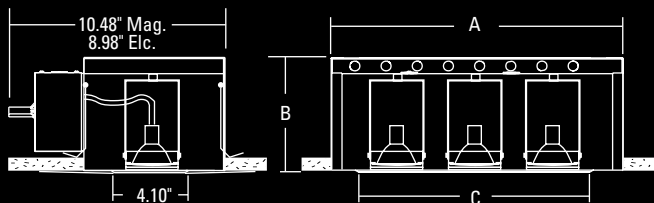

CO REMODEL TRIMLESS

1 FIXTURE TYPE	Catalog #	Description
	C0170STR-RMD	(1) One Light AR70 Remodel
	C0270STR-RMD	(2) Two Light AR70 Remodel
	C0370STR-RMD	(3) Three Light AR70 Remodel
	C0470STR-RMD	(4) Four Light AR70 Remodel
	C0570STR-RMD	(5) Five Light AR70 Remodel
	C0670STR-RMD	(6) Six Light AR70 Remodel
	C0470STRSQ-RMD	(4) Four Lt. Square AR70 Remodel

2 INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

3 WATTAGE	Catalog #	Description
	20	20 Watt AR70 Bayonet 12V
	50	50 Watt AR70 Bayonet 12V

4 LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

5 TRANSFORMER	Catalog #	Description
	ELC	Electronic Transformer

6 VOLTAGE	Catalog #	Description
	120	120 Volt (Standard)
	277	277 Volt

Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	WATTAGE	LAMP HOLDER	TRANSFORMER	VOLTAGE
C0470STR-RMD	WH	50	RT	MAG	120


Four Light CO Series Remodel Trimless Fixture, White Interior, AR70 50 Watt, Retractable Yoke, Magnetic Transformer, 120 Volt

Use only dimmers specifically designed for use with magnetic or electronic transformers. Low voltage fixtures using magnetic transformers may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Recessed Low Voltage AR70 Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and Transformers attached to fixture with easy below-ceiling access
- Offered with electronic transformer with fuse and short circuit protection
- Suitable for remodel / retrofit applications

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light Elc. Xfmr.	7.05"	5.01"	4.10"	7.18" x 7.18"
2 Light Elc. Xfmr.	11.45"	5.01"	8.50"	11.58" x 7.18"
3 Light Elc. Xfmr.	15.30"	5.01"	12.35"	15.43" x 7.18"
4 Light Elc. Xfmr.	19.15"	5.01"	16.20"	19.28" x 7.18"
5 Light Elc. Xfmr.	23.00"	5.01"	20.50"	23.25" x 7.18"
6 Light Elc. Xfmr.	26.85"	5.01"	23.90"	26.98" x 7.18"
4 Light Sq. Elc. Xfmr.	11.45"	5.01"	8.50" ²	11.55" x 11.55"

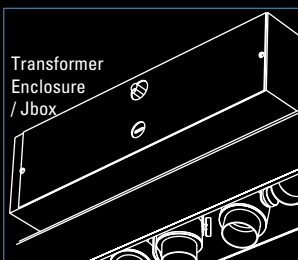

A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.








C01200STR BK 50 RT MAG 120

Recessed Low Voltage AR111 Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box and Transformers located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations
- Low voltage models offered with magnetic transformer or electronic transformer with fuse and short circuit protection

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light Mag. Xfmr.	23.38"	6.64"	7.05"	9.80" x 9.86"
1 Light Elec. Xfmr.	23.38"	6.64"	7.05"	
2 Light Mag. Xfmr.	31.06"	6.64"	14.74"	17.49" x 9.86"
2 Light Elec. Xfmr.	31.06"	6.64"	14.74"	
3 Light Mag. Xfmr.	42.41"	6.64"	21.59"	24.34" x 9.86"
3 Light Elec. Xfmr.	37.91"	6.64"	21.59"	
4 Light Mag. Xfmr.	49.26"	6.64"	28.44"	31.19" x 9.86"
4 Light Elec. Xfmr.	44.76"	6.64"	28.44"	
5 Light Mag. Xfmr.	56.11"	6.64"	35.29"	38.04" x 9.86"
5 Light Elec. Xfmr.	51.61"	6.64"	35.29"	
6 Light Mag. Xfmr.	62.96"	6.64"	42.14"	44.89" x 9.86"
6 Light Elec. Xfmr.	58.46"	6.64"	42.14"	
4 Light Sq. Mag. Xfmr.	35.56"	6.64"	14.74"	17.49" x 16.71"
4 Light Sq. Elec. Xfmr.	31.06"	6.64"	14.74"	

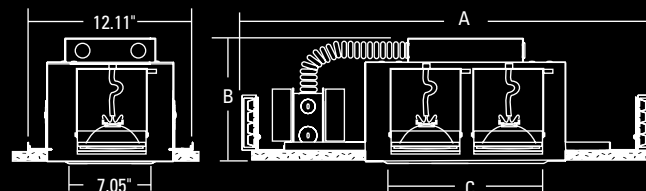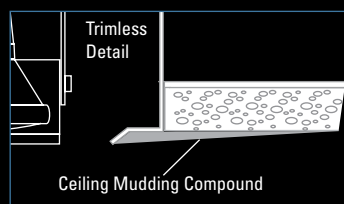

CO STANDARD TRIMLESS

Fixture Type	Catalog #	Description
FIXTURE TYPE	C01010STR	(1) One Light AR111
	C01000STR	(2) Two Light AR111
	C01100STR	(3) Three Light AR111
	C01200STR	(4) Four Light AR111
	C01250STR	(5) Five Light AR111
	C01260STR	(6) Six Light AR111
	C01200STRSQ	(4) Four Light Square AR111

Interior	Catalog #	Description
INTERIOR	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

Wattage	Catalog #	Description
WATTAGE	35	35 Watt AR111 12V
	50	50 Watt AR111 12V
	75	75 Watt AR111 12V
	100	100 Watt AR111 12V

Lamp Holder	Catalog #	Description
LAMP HOLDER	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

Transformer	Catalog #	Description
TRANSFORMER	ELC	Electronic Transformer
	MAG	Magnetic Transformer

Voltage	Catalog #	Description
VOLTAGE	120	120 Volt (Standard)
	277	277 Volt


Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

Fixture Type	Interior	Wattage	Lamp Holder	Transformer	Voltage
C01200STR	BK	50	RT	MAG	120

Four Light CO Series New Construction Trimless Fixture, Black Interior, AR111 50 Watt, Retractable Yoke, Magnetic Transformer, 120 Volt

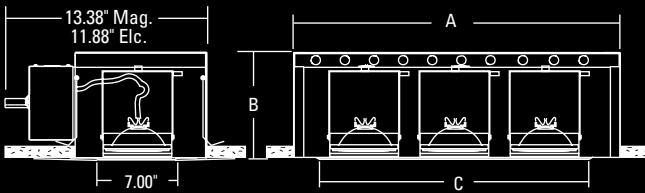

CO REMODEL TRIMLESS

FIXTURE TYPE	Catalog #	Description
	C01010STR-RMD	(1) One Light AR111 Remodel
	C01000STR-RMD	(2) Two Light AR111 Remodel
	C01100STR-RMD	(3) Three Light AR111 Remodel
	C01200STR-RMD	(4) Four Light AR111 Remodel
	C01250STR-RMD	(5) Five Light AR111 Remodel
	C01260STR-RMD	(6) Six Light AR111 Remodel
	C01200STRSQ-RMD	(4) Four Lt. Square AR111 Remodel

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

WATTAGE	Catalog #	Description
	35	35 Watt AR111 12V
	50	50 Watt AR111 12V
	75	75 Watt AR111 12V
	100	100 Watt AR111 12V

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

TRANSFORMER	Catalog #	Description
	ELC	Electronic Transformer

VOLTAGE	Catalog #	Description
	120	120 Volt (Standard)
	277	277 Volt

Optional Accessories - See page 216 for details.			
Baffle	Snoots	Louvers	Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	WATTAGE	LAMP HOLDER	TRANSFORMER	VOLTAGE
C01200STR-RMD	BK	50	RT	MAG	120


Four Light CO Series Remodel Trimless Fixture, Black Interior, AR111 50 Watt, Retractable Yoke, Magnetic Transformer, 120 Volt

Use only dimmers specifically designed for use with magnetic or electronic transformers. Low voltage fixtures using magnetic transformers may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

Recessed Low Voltage AR111 Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and Transformers attached to fixture with easy below-ceiling access
- Offered with electronic transformer with fuse and short circuit protection
- Suitable for remodel / retrofit applications

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light Elc. Xfmr.	9.95"	7.50"	7.00"	10.10" x 10.10"
2 Light Elc. Xfmr.	17.95"	7.50"	15.00"	18.10" x 10.10"
3 Light Elc. Xfmr.	24.95"	7.50"	22.00"	25.10" x 10.10"
4 Light Elc. Xfmr.	31.95"	7.50"	29.00"	32.10" x 10.10"
5 Light Elc. Xfmr.	38.95"	7.50"	36.00"	39.10" x 10.10"
6 Light Elc. Xfmr.	45.95"	7.50"	43.00"	46.10" x 10.10"
4 Light Sq. Elc. Xfmr.	17.95"	7.50"	15.00" ²	18.10" x 18.10"

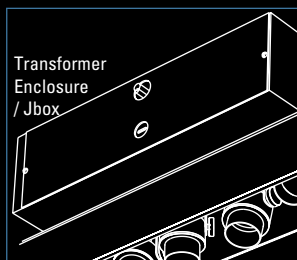

A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.





COMBOLIGHT®








CO1640STR BK RT

Recessed Line Voltage PAR16 Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	21.63"	6.64"	5.30"	8.10" x 8.05"
2 Light	30.187"	6.64"	13.85"	16.60" x 8.05"
3 Light	41.53"	6.64"	20.70"	23.45" x 8.05"
4 Light	48.38"	6.64"	27.55"	30.30" x 8.05"
5 Light	55.23"	6.64"	34.40"	37.15" x 8.05"
6 Light	62.08"	6.64"	41.25"	44.00" x 8.05"
4 Light Sq.	34.68"	6.64"	13.85" ²	16.60" x 16.60"

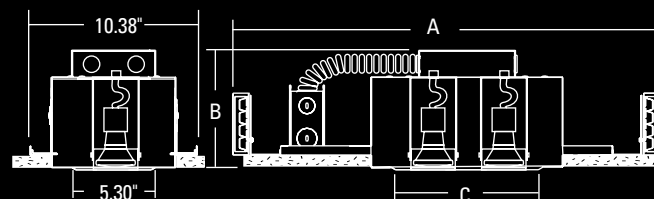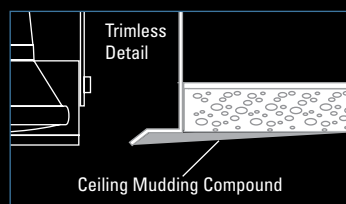

CO STANDARD TRIMLESS

Fixture Type	Catalog #	Description
	CO1610ISTR	(1) One Light PAR16
	CO1620ISTR	(2) Two Light PAR16
	CO1630ISTR	(3) Three Light PAR16
	CO1640ISTR	(4) Four Light PAR16
	CO1650ISTR	(5) Five Light PAR16
	CO1660ISTR	(6) Six Light PAR16
	CO1640ISTRSQ	(4) Four Light Square PAR16

Interior	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

Lamp Holder	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal


Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

Fixture Type	Interior	Lamp Holder
CO1640ISTR	BK	RT

Four Light CO Series New Construction Trimless Fixture, Black Interior, PAR16, Retractable Yoke

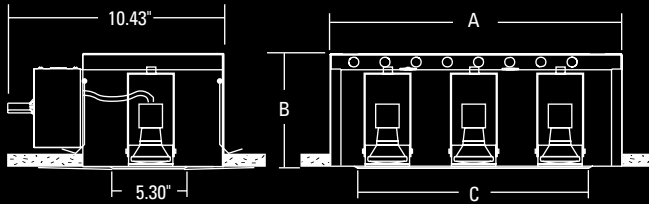

CO REMODEL TRIMLESS

FIXTURE TYPE	Catalog #	Description
	CO1610ISTR-RMD	(1) One Light PAR16 Remodel
	CO1620ISTR-RMD	(2) Two Light PAR16 Remodel
	CO1630ISTR-RMD	(3) Three Light PAR16 Remodel
	CO1640ISTR-RMD	(4) Four Light PAR16 Remodel
	CO1650ISTR-RMD	(5) Five Light PAR16 Remodel
	CO1660ISTR-RMD	(6) Six Light PAR16 Remodel
	CO1640ISTRSQ-RMD	(4) Four Lt. Square PAR16 Remodel

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

Optional Accessories - See page 216 for details.			
Baffle	Snoots	Louvers	Lenses

Ordering Example


FIXTURE TYPE	INTERIOR	LAMP HOLDER
CO1640ISTR-RMD	BK	RT

Four Light CO Series Remodel Trimless Fixture, Black Interior, PAR16, Retractable Yoke

Recessed Line Voltage PAR16 Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and attached to fixture with easy below-ceiling access
- Suitable for remodel / retrofit applications

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	8.25"	5.79"	5.30"	8.38" x 8.38"
2 Light	16.80"	5.79"	13.85"	16.93" x 8.38"
3 Light	23.65"	5.79"	20.70"	23.78" x 8.38"
4 Light	30.50"	5.79"	27.55"	30.63" x 8.38"
5 Light	37.35"	5.79"	34.40"	37.48" x 8.38"
6 Light	44.20"	5.79"	41.25"	44.33" x 8.38"
4 Light Sq.	16.80"	5.79"	13.85" ²	16.93" x 16.93"



A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.








CO2005STR WH RT (Shown with Cross Baffle Accessory)

Recessed Line Voltage PAR20 Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	21.63"	6.64"	5.30"	8.10" x 8.05"
2 Light	30.18"	6.64"	13.85"	16.60" x 8.05"
3 Light	37.03"	6.64"	20.70"	23.45" x 8.05"
4 Light	43.88"	6.64"	27.55"	30.30" x 8.05"
5 Light	50.73"	6.64"	34.40"	37.15" x 8.05"
6 Light	57.58"	6.64"	41.25"	44.00" x 8.05"
4 Light Sq.	30.18"	6.64"	13.85"	16.60" x 16.60"

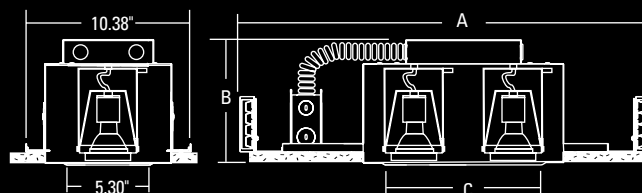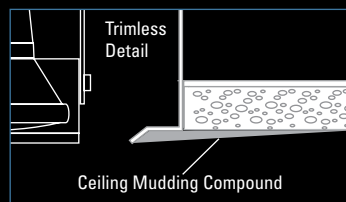

CO STANDARD TRIMLESS

FIXTURE TYPE	Catalog #	Description
	CO2010ISTR	(1) One Light PAR20
	CO2000ISTR	(2) Two Light PAR20
	CO2003ISTR	(3) Three Light PAR20
	CO2005ISTR	(4) Four Light PAR20
	CO2050ISTR	(5) Five Light PAR20
	CO2060ISTR	(6) Six Light PAR20
	CO2005ISTRSQ	(4) Four Light Square PAR20

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal


Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	LAMP HOLDER
CO2005ISTR	WH	RT

Four Light CO Series New Construction Trimless Fixture, White Interior, PAR20, Retractable Yoke

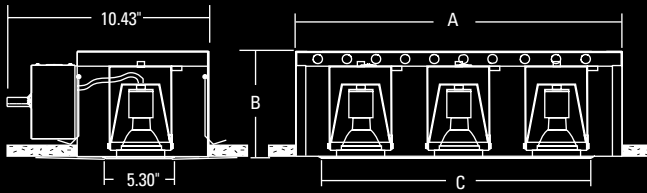

CO REMODEL TRIMLESS

FIXTURE TYPE	Catalog #	Description
	CO2010ISTR-RMD	(1) One Light PAR20 Remodel
	CO2000ISTR-RMD	(2) Two Light PAR20 Remodel
	CO2003ISTR-RMD	(3) Three Light PAR20 Remodel
	CO2005ISTR-RMD	(4) Four Light PAR20 Remodel
	CO2050ISTR-RMD	(5) Five Light PAR20 Remodel
	CO2060ISTR-RMD	(6) Six Light PAR20 Remodel
	CO2005ISTRSQ-RMD	(4) Four Lt. Square PAR20 Remodel

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

Optional Accessories - See page 216 for details.			
Baffle	Snoots	Louvers	Lenses

Ordering Example


FIXTURE TYPE	INTERIOR	LAMP HOLDER
CO2005ISTR-RMD	WH	RT

Four Light CO Series Remodel Trimless Fixture, White Interior, PAR20, Retractable Yoke

Recessed Line Voltage PAR20 Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and attached to fixture with easy below-ceiling access
- Suitable for remodel / retrofit applications

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	8.25"	5.79"	5.30"	8.38" x 8.38"
2 Light	16.80"	5.79"	13.85"	16.93" x 8.38"
3 Light	23.65"	5.79"	20.70"	23.78" x 8.38"
4 Light	30.50"	5.79"	27.55"	30.63" x 8.38"
5 Light	37.35"	5.79"	34.40"	37.48" x 8.38"
6 Light	44.20"	5.79"	41.25"	44.33" x 8.38"
4 Light Sq.	16.80"	5.79"	13.85" ²	16.93" x 16.93"



A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.








CO1800STR BK RT

Recessed Line Voltage PAR30 Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations
- Not for use with "Long Neck" PAR30 lamps

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	23.38"	6.64"	7.05"	9.80" x 9.86"
2 Light	31.06"	6.64"	14.74"	17.49" x 9.86"
3 Light	37.91"	6.64"	21.59"	24.34" x 9.86"
4 Light	44.76"	6.64"	28.44"	31.19" x 9.86"
5 Light	51.61"	6.64"	35.29"	38.04" x 9.86"
6 Light	58.46"	6.64"	42.14"	44.89" x 9.86"
4 Light Sq.	31.06	6.64"	14.74"	17.49" x 16.71"

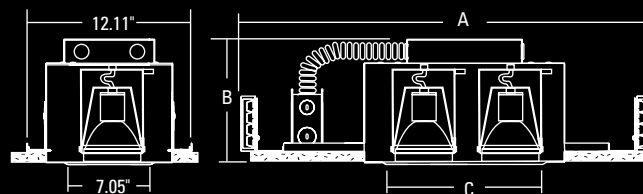

CO STANDARD TRIMLESS

Fixture Type	Catalog #	Description
	CO3010ISTR	(1) One Light PAR30
	CO1600ISTR	(2) Two Light PAR30
	CO1700ISTR	(3) Three Light PAR30
	CO1800ISTR	(4) Four Light PAR30
	CO3050ISTR	(5) Five Light PAR30
	CO3060ISTR	(6) Six Light PAR30
	CO1800ISTRSQ	(4) Four Light Square PAR30
		Not for use with "Long Neck" PAR30 Lamps

Interior	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

Lamp Holder	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal


Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

Fixture Type	Interior	Lamp Holder
CO2005ISTR	BK	RT

Four Light CO Series New Construction Trimless Fixture, Black Interior, PAR30, Retractable Yoke

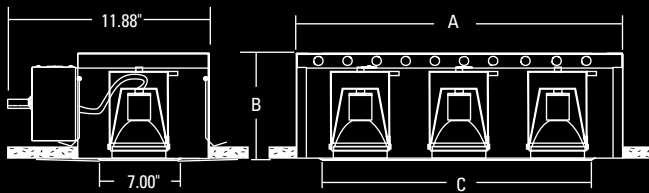

CO REMODEL TRIMLESS

1 FIXTURE TYPE	Catalog #	Description
	CO3010ISTR-RMD	(1) One Light PAR30 Remodel
	CO1600ISTR-RMD	(2) Two Light PAR30 Remodel
	CO1700ISTR-RMD	(3) Three Light PAR30 Remodel
	CO1800ISTR-RMD	(4) Four Light PAR30 Remodel
	CO3050ISTR-RMD	(5) Five Light PAR30 Remodel
	CO3060ISTR-RMD	(6) Six Light PAR30 Remodel
	CO1800ISTRSQ-RMD	(4) Four Lt. Square PAR30 Remodel
		Not for use with "Long Neck" PAR30 Lamps

2 INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

3 LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

Optional Accessories - See page 216 for details.			
Baffle	Snoots	Louvers	Lenses

Ordering Example


FIXTURE TYPE	INTERIOR	LAMP HOLDER
CO1800ISTR-RMD	BK	RT

Four Light CO Series Remodel Trimless Fixture, Black Interior, PAR30, Retractable Yoke

Recessed Line Voltage PAR30 Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and attached to fixture with easy below-ceiling access
- Suitable for remodel / retrofit applications
- Not for use with "Long Neck" PAR30 lamps

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	9.95"	7.50"	7.00"	10.10" x 10.10"
2 Light	17.95"	7.50"	15.00"	18.10" x 10.10"
3 Light	24.95"	7.50"	22.00"	25.10" x 10.10"
4 Light	31.95"	7.50"	29.00"	32.10" x 10.10"
5 Light	38.95"	7.50"	36.00"	39.10" x 10.10"
6 Light	45.95"	7.50"	43.00"	46.10" x 10.10"
4 Light Sq.	17.95"	7.50"	15.00" ²	18.10" x 18.10"



A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.








CO3840STR WH RT

Recessed Line Voltage PAR38 Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	25.22"	8.34"	8.90"	11.65" x 11.69"
2 Light	34.12"	8.34"	17.80"	20.55" x 11.69"
3 Light	43.02"	8.34"	26.70"	29.54" x 11.69"
4 Light	51.92"	8.34"	35.60"	38.35" x 11.69"
5 Light	60.82"	8.34"	44.50"	47.25" x 11.69"
6 Light	69.72"	8.34"	53.40"	56.15" x 11.69"
4 Light Sq.	34.12"	8.34"	17.80"	20.55" x 20.59"

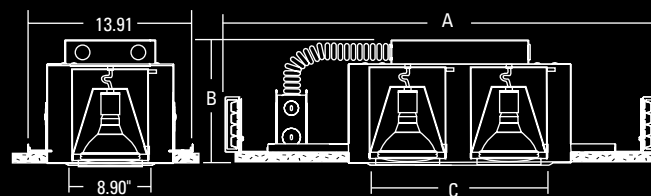

CO STANDARD TRIMLESS

FIXTURE TYPE	Catalog #	Description
	CO3810IS	(1) One Light PAR38
	CO3820IS	(2) Two Light PAR38
	CO3830IS	(3) Three Light PAR38
	CO3840IS	(4) Four Light PAR38
	CO3850IS	(5) Five Light PAR38
	CO3860IS	(6) Six Light PAR38
	CO3840ISSQ	(4) Four Light Square PAR38

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal


Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	LAMP HOLDER
CO3840ISTR	WH	RT

Four Light CO Series New Construction Trimless Fixture, White Interior, PAR38, Retractable Yoke

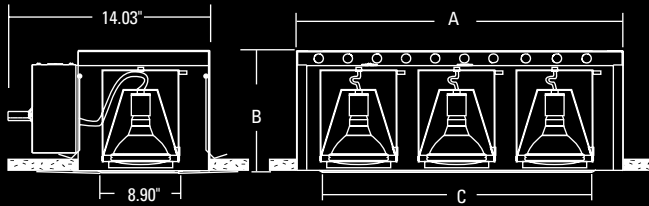

CO REMODEL TRIMLESS

1 FIXTURE TYPE	Catalog #	Description
	C03810IS-RMD	(1) One Light PAR38 Remodel
	C03820IS-RMD	(2) Two Light PAR38 Remodel
	C03830IS-RMD	(3) Three Light PAR38 Remodel
	C03840IS-RMD	(4) Four Light PAR38 Remodel
	C03850IS-RMD	(5) Five Light PAR38 Remodel
	C03860IS-RMD	(6) Six Light PAR38 Remodel
	C03840ISSQ-RMD	(4) Four Lt. Square PAR38 Remodel

2 INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

3 LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

Optional Accessories - See page 216 for details.			
Baffle	Snoots	Louvers	Lenses

Ordering Example


FIXTURE TYPE	INTERIOR	LAMP HOLDER
C03840ISTR-RMD	BK	RT

Four Light CO Series Remodel Trimless Fixture, Black Interior, PAR38, Retractable Yoke

Recessed Line Voltage PAR38 Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and attached to fixture with easy below-ceiling access
- Suitable for remodel / retrofit applications

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	11.85"	7.49"	8.90"	11.98" x 11.98"
2 Light	20.68"	7.49"	17.73"	20.81" x 11.98"
3 Light	29.58"	7.49"	26.63"	29.71" x 11.98"
4 Light	38.48"	7.49"	35.53"	38.61" x 11.98"
5 Light	47.38"	7.49"	44.43"	47.51" x 11.98"
6 Light	56.28"	7.49"	53.33"	56.41" x 11.98"
4 Light Sq.	20.68"	7.49"	17.30" ²	20.81" x 20.81"



A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.



ComboLight "CO" Series Trimless
Louis Vuitton Store
New York, NY



COMBOLIGHT®








CO240MHTR BK 39 RT 120

Recessed PAR20MH Metal Halide Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations
- Configured with integral Aromat® Electronic Ballasts

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	21.63"	6.64"	5.30"	8.10" x 8.05"
2 Light	30.18"	6.64"	13.85"	16.60" x 8.05"
3 Light	41.53"	6.64"	20.70"	23.45" x 8.05"
4 Light	48.38"	6.64"	27.55"	30.30" x 8.05"
5 Light	55.23"	6.64"	34.40"	37.15" x 8.05"
6 Light	62.08"	6.64"	41.25"	44.00" x 8.05"
4 Light Sq.	34.68"	6.64"	13.85"	16.60" x 16.60"

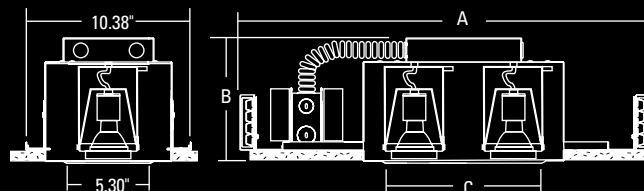

CO STANDARD TRIMLESS

Fixture Type	Catalog #	Description
	CO210MHTR	(1) One Light PAR20MH
	CO220MHTR	(2) Two Light PAR20MH
	CO230MHTR	(3) Three Light PAR20MH
	CO240MHTR	(4) Four Light PAR20MH
	CO250MHTR	(5) Five Light PAR20MH
	CO260MHTR	(6) Six Light PAR20MH
	CO240MHSQTR	(4) Four Light Square PAR20MH

Interior	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

Wattage	Catalog #	Description
	39	39 Watt PAR20 Metal Halide (Standard)
		Configured with Aromat® Electronic Ballasts

Lamp Holder	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

Voltage	Catalog #	Description
	120	120 Volts (Standard)
	277	277 Volts


Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

Fixture Type	Interior	Wattage	Lamp Hold- er	Voltage
CO240MHTR	BK	39	RT	120

Four Light CO Series New Construction Trimless Fixture, Black Interior, 39 Watt PAR20MH, Retractable Yoke, 120 Volts

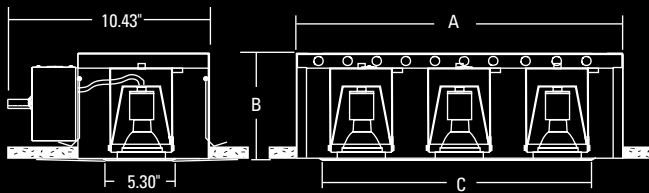

CO REMODEL TRIMLESS

FIXTURE TYPE	Catalog #	Description
	CO210MHTR-RMD	(1) One Light PAR20MH
	CO220MHTR-RMD	(2) Two Light PAR20MH
	CO230MHTR-RMD	(3) Three Light PAR20MH
	CO240MHTR-RMD	(4) Four Light PAR20MH
	CO250MHTR-RMD	(5) Five Light PAR20MH
	CO260MHTR-RMD	(6) Six Light PAR20MH
	CO240MHSQTR-RMD	(4) Four Light Square PAR20MH

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

WATTAGE	Catalog #	Description
	39	39 Watt PAR20 Metal Halide (Standard)
		Configured with Aromat® Electronic Ballasts

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

VOLTAGE	Catalog #	Description
	120	120 Volts (Standard)
	277	277 Volts

Optional Accessories - See page 216 for details.			
Baffle	Snoots	Louvers	Lenses

Ordering Example


FIXTURE TYPE	INTERIOR	WATTAGE	LAMP HOLD-ER	VOLTAGE
CO240MHTR-RMD	BK	39	RT	120

Four Light CO Series Remodel Trimless Fixture, Black Interior, 39 Watt PAR20MH, Retractable Yoke, 120 Volts

Recessed PAR20MH Metal Halide Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and Ballasts attached to fixture with easy below-ceiling access
- Suitable for remodel / retrofit applications
- Configured with integral Aromat® Electronic Ballasts

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	8.25"	5.79"	5.30"	8.38" x 8.38"
2 Light	16.80"	5.79"	13.85"	16.93" x 8.38"
3 Light	23.65"	5.79"	20.70"	23.78" x 8.38"
4 Light	30.50"	5.79"	27.55"	30.63" x 8.38"
5 Light	37.35"	5.79"	34.40"	37.48" x 8.38"
6 Light	44.20"	5.79"	41.25"	44.33" x 8.38"
4 Light Sq.	16.80"	5.79"	13.85" ²	16.93" x 16.93"



A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.








C0340STR WH 70 RT 120

Recessed PAR30MH Metal Halide Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations
- Configured with integral Aromat® Electronic Ballasts

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	25.22"	8.34"	8.90"	11.65" x 11.69"
2 Light	34.12"	8.34"	17.80"	20.55" x 11.69"
3 Light	47.52"	8.34"	26.70"	29.45" x 11.69"
4 Light	56.42"	8.34"	35.60"	38.35" x 11.69"
5 Light	65.32"	8.34"	44.50"	47.25" x 11.69"
6 Light	74.22"	8.34"	53.40"	56.15" x 11.69"
4 Light Sq.	38.62"	8.34"	17.80"	20.55" x 20.59"

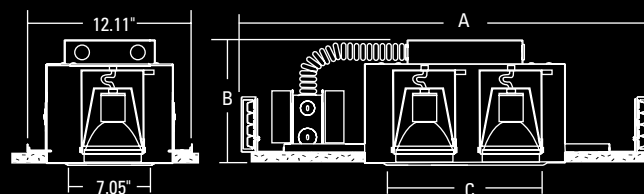

CO STANDARD TRIMLESS

FIXTURE TYPE	Catalog #	Description
	C0310MHTR	(1) One Light PAR30MH
	C0320MHTR	(2) Two Light PAR30MH
	C0330MHTR	(3) Three Light PAR30MH
	C0340MHTR	(4) Four Light PAR30MH
	C0350MHTR	(5) Five Light PAR30MH
	C0360MHTR	(6) Six Light PAR30MH
	C0340MHTRSQ	(4) Four Light Square PAR30MH

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

WATTAGE	Catalog #	Description
	39	39 Watt PAR30 Metal Halide
	70	70 Watt PAR30 Metal Halide
		Configured with Aromat® Electronic Ballasts

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

VOLTAGE	Catalog #	Description
	120	120 Volts (Standard)
	277	277 Volts


Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	WATTAGE	LAMP HOLD-ER	VOLTAGE
C0340MHTR	WH	70	RT	120

Four Light CO Series New Construction Trimless Fixture, White Interior, 70 Watt PAR30MH, Retractable Yoke, 120 Volts

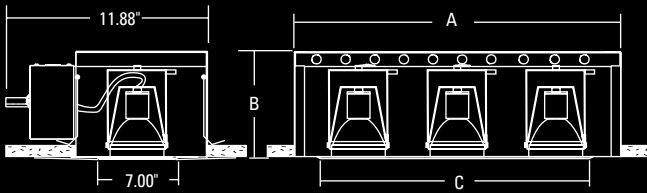

CO REMODEL TRIMLESS

FIXTURE TYPE	Catalog #	Description
	C0310MHTR-RMD	(1) One Light PAR30MH
	C0320MHTR-RMD	(2) Two Light PAR30MH
	C0330MHTR-RMD	(3) Three Light PAR30MH
	C0340MHTR-RMD	(4) Four Light PAR30MH
	C0350MHTR-RMD	(5) Five Light PAR30MH
	C0360MHTR-RMD	(6) Six Light PAR30MH
	C0340MHTRSQ-RMD	(4) Four Light Square PAR30MH

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

WATTAGE	Catalog #	Description
	39	39 Watt PAR30 Metal Halide
	70	70 Watt PAR30 Metal Halide
		Configured with Aromat® Electronic Ballasts

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

VOLTAGE	Catalog #	Description
	120	120 Volts (Standard)
	277	277 Volts

Optional Accessories - See page 216 for details.			
Baffle	Snoots	Louvers	Lenses

Ordering Example


FIXTURE TYPE	INTERIOR	WATTAGE	LAMP HOLD-ER	VOLTAGE
C0340MHTR-RMD	WH	70	RT	120

Four Light CO Series Remodel Trimless Fixture, White Interior, 70 Watt PAR30MH, Retractable Yoke, 120 Volts

Recessed PAR30MH Metal Halide Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and Ballasts attached to fixture with easy below-ceiling access
- Suitable for remodel / retrofit applications
- Configured with integral Aromat® Electronic Ballasts

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	9.95"	7.50"	7.00"	10.10" x 10.10"
2 Light	17.95"	7.50"	15.00"	18.10" x 10.10"
3 Light	24.95"	7.50"	22.00"	25.10" x 10.10"
4 Light	31.95"	7.50"	29.00"	32.10" x 10.10"
5 Light	38.95"	7.50"	36.00"	39.10" x 10.10"
6 Light	45.95"	7.50"	43.00"	46.10" x 10.10"
4 Light Sq.	17.95"	7.50"	15.00" ²	18.10" x 18.10"



A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.








CO840STR BK 100 RT 120 (Shown with Cross Baffle Accessory)

Recessed PAR38MH Metal Halide Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations
- Configured with integral Aromat® Electronic Ballasts

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	25.22"	8.34"	8.90"	11.65" x 11.69"
2 Light	34.12"	8.34"	17.80"	20.55" x 11.69"
3 Light	47.52"	8.34"	26.70"	29.45" x 11.69"
4 Light	56.42"	8.34"	35.60"	38.35" x 11.69"
5 Light	65.32"	8.34"	44.50"	47.25" x 11.69"
6 Light	74.22"	8.34"	53.40"	56.15" x 11.69"
4 Light Sq.	38.62"	8.34"	17.80"	20.55" x 20.59"

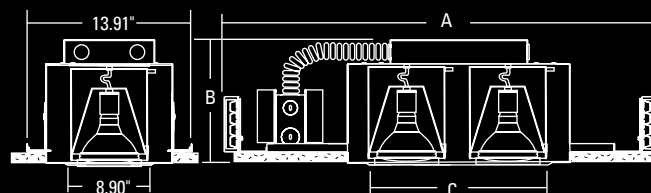


CO STANDARD TRIMLESS

1 FIXTURE TYPE	Catalog #	Description
	CO810MHTR	(1) One Light PAR38MH
	CO820MHTR	(2) Two Light PAR38MH
	CO830MHTR	(3) Three Light PAR38MH
	CO840MHTR	(4) Four Light PAR38MH
	CO850MHTR	(5) Five Light PAR38MH
	CO860MHTR	(6) Six Light PAR38MH
2 INTERIOR	CO840MHTRSQ	(4) Four Light Square PAR38MH
	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)
3 WATTAGE	Catalog #	Description
	70	70 Watt PAR38 Metal Halide
	100	100 Watt PAR38 Metal Halide
		Configured with Aromat® Electronic Ballasts
4 LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal
5 VOLTAGE	Catalog #	Description
	120	120 Volts (Standard)
	277	277 Volts
	Optional Accessories - See page 216 for details.	
		Baffle
		Snoots
		Louvers
		Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	WATTAGE	LAMP HOLD-ER	VOLTAGE
CO840MHTR	BK	100	RT	120

Four Light CO Series New Construction Trimless Fixture, Black Interior, 100 Watt PAR38MH, Retractable Yoke, 120 Volts

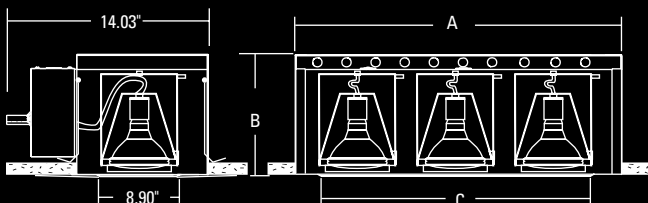

CO REMODEL TRIMLESS

FIXTURE TYPE	Catalog #	Description
	CO810MHTR-RMD	(1) One Light PAR38MH
	CO820MHTR-RMD	(2) Two Light PAR38MH
	CO830MHTR-RMD	(3) Three Light PAR38MH
	CO840MHTR-RMD	(4) Four Light PAR38MH
	CO850MHTR-RMD	(5) Five Light PAR38MH
	CO860MHTR-RMD	(6) Six Light PAR38MH
	CO840MHTRSQ-RMD	(4) Four Light Square PAR38MH

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

WATTAGE	Catalog #	Description
	70	70 Watt PAR38 Metal Halide
	100	100 Watt PAR38 Metal Halide
		Configured with Aromat® Electronic Ballasts

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

VOLTAGE	Catalog #	Description
	120	120 Volts (Standard)
	277	277 Volts

Optional Accessories - See page 216 for details.			
Baffle	Snoots	Louvers	Lenses

Ordering Example


FIXTURE TYPE	INTERIOR	WATTAGE	LAMP HOLDER	VOLTAGE
CO840MHTR-RMD	BK	100	RT	120

Four Light CO Series Remodel Trimless Fixture, White Interior, 100 Watt PAR38MH, Retractable Yoke, 120 Volts

Recessed PAR38MH Metal Halide Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and Ballasts attached to fixture with easy below-ceiling access
- Suitable for remodel / retrofit applications
- Configured with integral Aromat® Electronic Ballasts

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	11.85"	7.49"	8.90"	11.98" x 11.98"
2 Light	20.68"	7.49"	17.73"	20.81" x 11.98"
3 Light	29.58"	7.49"	26.63"	29.71" x 11.98"
4 Light	38.48"	7.49"	35.53"	38.61" x 11.98"
5 Light	47.38"	7.49"	44.43"	47.51" x 11.98"
6 Light	56.28"	7.49"	53.33"	56.41" x 11.98"
4 Light Sq.	20.68"	7.49"	17.30" ²	20.81" x 20.81"



A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.



COT44MHTR BK 70 27 RT 120

Recessed T4 G8.5 Metal Halide Trimless Standard Fixture

- Standard Trimless New Construction Fixture
- Adjustable Perforated mesh plaster frame can accommodate 1/2" to 1-1/4" ceiling thickness and provides trimless ceiling opening
- Electrical J-Box located in plaster frame with easy below-ceiling access through dual access doors
- Includes butterfly brackets for black iron installations
- Configured with integral Aromat® Electronic Ballasts








Utilizes a T4 G8.5 Metal Halide lamp with a sophisticated all aluminum reflector in light distributions of 15° narrow, 27° medium and 55° wide spreads.

Luminance / Performance Comparison to Regular H.I.D. Lamps

	Regular MH Lamp		T4 G8.5 MH Lamp	
Initial Lumens	35W = 2000	70W = 4850	35W = 3300	70W = 6600
Rated Lamp Life	35W = 9000 hrs	70W = 9000 hrs	35W = 9000 hrs	70W = 9000 hrs

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	25.22"	8.34"	8.90"	11.65" x 11.69"
2 Light	34.12"	8.34"	17.80"	20.55" x 11.69"
3 Light	47.52"	8.34"	26.70"	29.45" x 11.69"
4 Light	56.42"	8.34"	35.60"	38.35" x 11.69"
4 Light Sq.	38.62"	8.34"	17.80"	20.55" x 20.59"

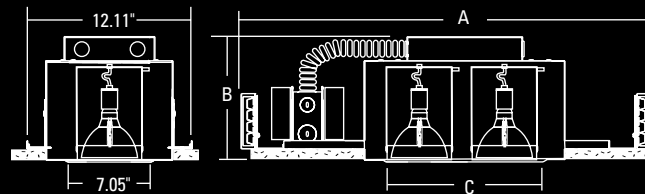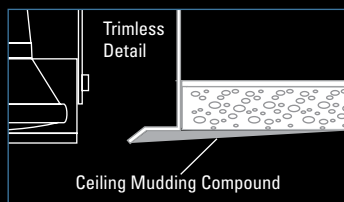

CO STANDARD TRIMLESS

1

FIXTURE TYPE

Catalog #	Description
COT41MHTR	(1) One Light T4 G8.5MH
COT42MHTR	(2) Two Light T4 G8.5MH
COT43MHTR	(3) Three Light T4 G8.5MH
COT44MHTR	(4) Four Light T4 G8.5MH
COT44MHTRSQ	(4) Four Light Square T4 G8.5MH

2

INTERIOR

Catalog #	Description
BK	Black
WH	White
S	Silver
PT	Custom Color (Specify)

3

WATTAGE

Catalog #	Description
35	35 Watt T4 G8.5MH Metal Halide
70	70 Watt T4 G8.5MH Metal Halide
	Configured with Aromat® Electronic Ballasts

4

DISTRIBUTION

Catalog #	Description
15	Reflector w/ 15° Narrow Spread
27	Reflector w/ 27° Medium Spread
55	Reflector w/ 55° Wide Spread
	See page 217 for details

5

LAMP HOLDER

Catalog #	Description
YK	Regular Yoke (Standard)
RT	Retractable Yoke
DG	Double Gimbal

6

VOLTAGE

Catalog #	Description
120	120 Volts (Standard)
277	277 Volts


Optional Accessories - See page 216 for details.

			
Baffle	Snoots	Louvers	Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	WATTAGE	DISTRIBUTION	LAMP HOLDER	VOLTAGE
COT44MHTR	BK	70	27	RT	120

Four Light CO Series New Construction Trimless Fixture, Black Interior, 70 Watt T4 G8.5 MH, Reflector w/ 27° Distribution, Retractable Yoke, 120 Volts

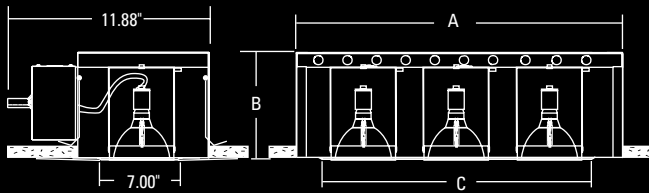

CO REMODEL TRIMLESS

FIXTURE TYPE	Catalog #	Description
	COT41MHTR-RMD	(1) One Light T4 G8.5MH
	COT42MHTR-RMD	(2) Two Light T4 G8.5MH
	COT43MHTR-RMD	(3) Three Light T4 G8.5MH
	COT44MHTR-RMD	(4) Four Light T4 G8.5MH
	COT44MHTRSQ-RMD	(4) Four Light Square T4 G8.5MH

INTERIOR	Catalog #	Description
	BK	Black
	WH	White
	S	Silver
	PT	Custom Color (Specify)

WATTAGE	Catalog #	Description
	35	35 Watt T4 G8.5MH Metal Halide
	70	70 Watt T4 G8.5MH Metal Halide
		Configured with Aromat® Electronic Ballasts

DISTRIBUTION	Catalog #	Description
	15	Reflector w/ 15° Narrow Spread
	27	Reflector w/ 27° Medium Spread
	55	Reflector w/ 55° Wide Spread
		See page 217 for details

LAMP HOLDER	Catalog #	Description
	YK	Regular Yoke (Standard)
	RT	Retractable Yoke
	DG	Double Gimbal

VOLTAGE	Catalog #	Description
	120	120 Volts (Standard)
	277	277 Volts

Optional Accessories - See page 216 for details.

Baffle	Snoots	Louvers	Lenses

Ordering Example

FIXTURE TYPE	INTERIOR	WATTAGE	DISTRIBUTION	LAMP HOLDER	VOLTAGE
COT44MHTR-RMD	BK	70	27	RT	120

Four Light CO Series Remodel Trimless Fixture, Black Interior, 70 Watt T4 G8.5 MH, Reflector w/ 27° Distribution, Retractable Yoke, 120 Volts

Recessed T4 G8.5 Metal Halide Trimless Remodel Fixture

- Trimless Remodel Fixture
- Perforated mesh plaster frame can accommodate 5/8" ceiling and provides trimless ceiling opening
- Electrical J-Box and Ballasts attached to fixture with easy below-ceiling access
- Suitable for remodel / retrofit applications
- Configured with integral Aromat® Electronic Ballasts




Utilizes a T4 G8.5 Metal Halide lamp with a sophisticated all aluminum reflector in light distributions of 15° narrow, 27° medium and 55° wide spreads.

Luminance / Performance Comparison to Regular H.I.D. Lamps

	Regular MH Lamp		T4 G8.5 MH Lamp	
Initial Lumens	35W = 2000	70W = 4850	35W = 3300	70W = 6600
Rated Lamp Life	35W = 9000 hrs	70W = 9000 hrs	35W = 9000 hrs	70W = 9000 hrs

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	9.95"	7.50"	7.00"	10.10" x 10.10"
2 Light	17.95"	7.50"	15.00"	18.10" x 10.10"
3 Light	24.95"	7.50"	22.00"	25.10" x 10.10"
4 Light	31.95"	7.50"	29.00"	32.10" x 10.10"
4 Light Sq.	17.95"	7.50"	15.00" ²	18.10" x 18.10"

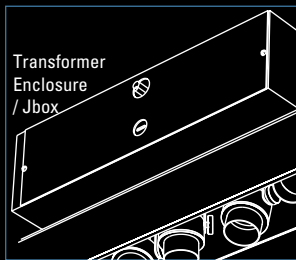

A J-box / wiring enclosure is mounted to the side of the fixture. The enclosure is easily accessed through from below the ceiling. Also houses electronic transformers on low voltage models and ballasts on metal halide models.