

COMBOLIGHT LV Series

COMBOLIGHT. LV Series Trimless

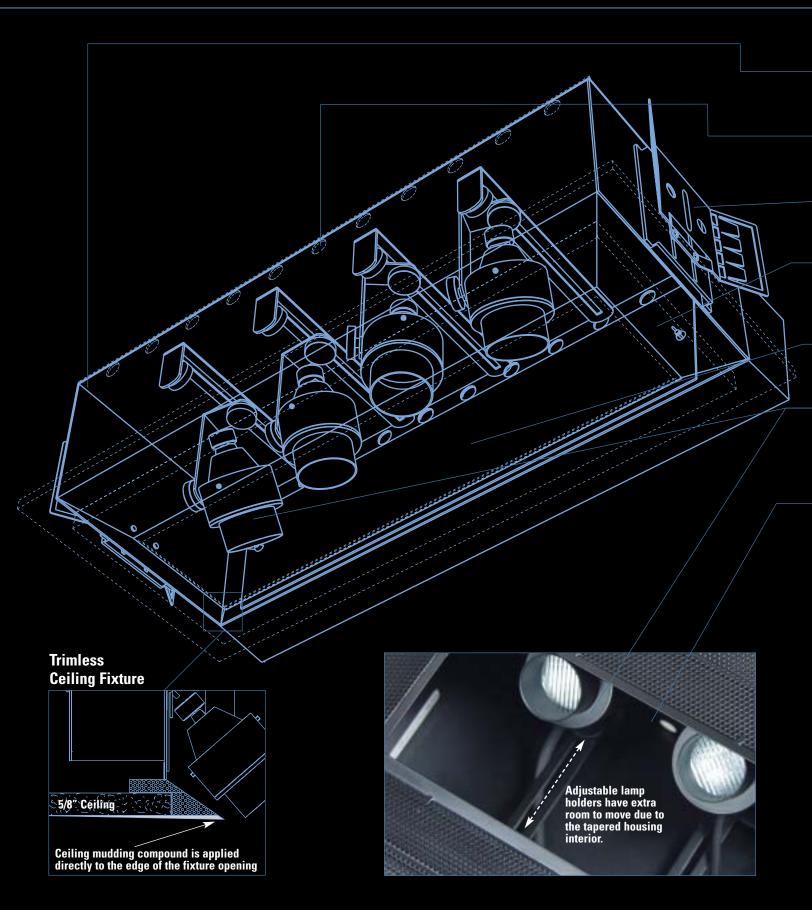

Next Generation Trimless Recessed Fixture

- 18 gauge cold rolled steel housing with durable powder coat finish
- Vent holes in housing provide cooler operation
- Butterfly brackets for commercial installations
- Perforated mesh plaster frame adheres to ceiling compound for seamless trimless mounting and can accommodates 1/2" or 5/8" drywall
- Easily accessible transformer / wiring compartment
- Three-Way adjustable lamp holder slides, pivots 90° and rotates 358° within the housing. Can accommodate up to three optical accessories
- Tapered housing interior provides added room for adjustability










LV316 BK 50 120


RECESSED MR16 "LV" SERIES

- A trimless fixture with lamp holders that adjust at three separate points. Lamps pivot, rotate and slide within the housing
- Perforated mesh plaster frame can accommodate 1/2" or 5/8" ceiling thickness
- Electrical J-Box and Transformers located in plaster frame with easy below-ceiling access.
- Includes butterfly brackets for black iron installations and hanger tabs for cable suspension.

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	9.75"	6.80"	4.00"	7.46" x 7.46"
2 Light	14.75″	6.80"	8.80"	12.00" x 7.46"
3 Light	18.67"	6.80"	12.90"	16.00" x 7.46"
4 Light	22.77"	6.80"	17.00"	20.13" x 7.46"
5 Light	26.87"	6.80"	21.10"	24.20" x 7.46"
6 Light	30.97"	6.80"	25.20"	28.30" x 7.46"
4 Light Square	14.57"	6.80"	8.80″²	12.26" x 12.26"

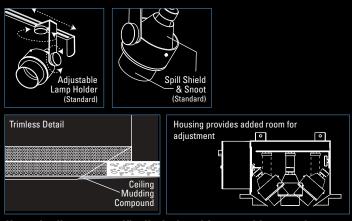

Use only dimmers specifically designed for use with magnetic or electronic transformers. Low voltage fixtures using magnetic transformers may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.



STANDARD "LV" TRIMLESS

Catalog #	Description
LV116	(1) One Light MR16
LV216	(2) Two Light MR16
E LV316	(3) Three Light MR16
LV416 LV516 LV616	(4) Four Light MR16
E LV516	(5) Five Light MR16
🙃 LV616	(6) Six Light MR16
LV416SQ	(4) Four Light Square MR16
	, ,

<u>←</u> Catalog #	Description
₽ BK	Black
₩H	White
≥ PT	Custom Color (Specify)

岩 Catalog #	Description
≦ 50	50 Watt MR16 Bi-Pin 12V
75 ************************************	75 Watt MR16 Bi-Pin 12V
LAMP	
≤	


Description
120 Volt (Standard)
277 Volt

Optional Accessories - See page 216 for details. Baffle Louvers Lenses


LV316	ВК	50	120			
FIXTURE TYPE	INTERIOR	WATTAGE	VOLTAGE			
Ordering Example						

Combolight LV Series Trimless, 3 Light 12 volt MR16, Black Interior, 50 watt lamps, 120 volts



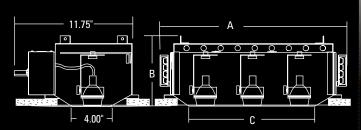

STANDARD "LV" TRIMLESS



	넁 Catalog #	Description
	≦ 20	20 Watt AR70 Bayonet 12V
3	⁻ ₹ 50	50 Watt AR70 Bayonet 12V
	AMP	
	₹	

TRANS FORMER Catalog #	Description
⋛ ELC	Electronic Transformer (Standard)
<u> </u>	
SI	
A A	

		B Catalog #	Description
(!	<u> </u>	≦ 120	120 Volt (Standard)
		호 ²⁷⁷	277 Volt

Baffle	Snoots	Louvers	Lenses	
Optional Accessories - See page 216 for details.				

Ordering Example					
FIXTURE TYPE	INTERIOR	WATTAGE	VOLTAGE		
LV470	BK	50	120		

Combolight LV Series Trimless, 4 Light 12 volt AR70, Black Interior, 50 watt lamps,




LV470 BK 50 120

RECESSED AR70 "LV" SERIES

- A trimless fixture with lamp holders that adjust at three separate points. Lamps pivot, rotate and slide within the housing
- Perforated mesh plaster frame can accommodate 1/2" or 5/8" ceiling thickness
- Electrical J-Box and Transformers located in plaster frame with easy below-ceiling access.
- Includes butterfly brackets for black iron installations and hanger tabs for cable suspension.

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	9.75"	6.80"	4.00"	7.46" x 7.46"
2 Light	14.75"	6.80"	8.80"	12.00" x 7.46"
3 Light	18.67"	6.80"	12.90"	16.00" x 7.46"
4 Light	22.77"	6.80"	17.00"	20.13" x 7.46"
5 Light	26.87"	6.80"	21.10"	24.20" x 7.46"
6 Light	30.97"	6.80"	25.20"	28.30" x 7.46"
4 Light Square	14.57"	6.80"	8.80″²	12.26" x 12.26"







Use only dimmers specifically designed for use with magnetic or electronic transformers. Low voltage fixtures using magnetic transformers may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.






LV1100 BK 50 120

RECESSED AR111 "LV" SERIES

- A trimless fixture with lamp holders that adjust at three separate points. Lamps pivot, rotate and slide within the housing
- Perforated mesh plaster frame can accommodate 1/2" or 5/8" ceiling thickness
- Electrical J-Box and Transformers located in plaster frame with easy below-ceiling access.
- Includes butterfly brackets for black iron installations and hanger tabs for cable suspension.


Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	12.77"	8.40"	7.00"	10.25" x 10.25"
2 Light	20.77"	8.40"	15.00"	18.25" x 10.25"
3 Light	27.77"	8.40"	22.00"	25.25" x 10.25"
4 Light	34.77"	8.40"	29.00"	32.25" x 10.25"
5 Light	41.77"	8.40"	36.00"	39.25" x 10.25"
6 Light	48.77"	8.40"	43.00"	46.25" x 10.25"
4 Light Square	20.77"	8.40"	15.00″²	18.25" x 18.25"







Use only dimmers specifically designed for use with magnetic or electronic transformers. Low voltage fixtures using magnetic transformers may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.



STANDARD "LV" TRIMLESS

Catalog #	Description
LV1010	(1) One Light AR111
LV1000	(2) Two Light AR111
E LV1100	(3) Three Light AR111
Ë LV1200	(4) Four Light AR111
LV1200 LV1250 LV1260	(5) Five Light AR111
E LV1260	(6) Six Light AR111
LV1200SQ	(4) Four Light Square AR111

← Catalog #	Description	ı
→ BK	Black	
₩ H	White	
≧ PT	Custom Color (Specify)	

넁 Catalog #	Description
≦ 35	35 watt AR111 12V
_ \overline{4} 50	50 watt AR111 12V
2 75	75 watt AR111 12 V
100 TO	100 watt AR111 12V
\$	

병 Catalog #	Description
1 120	120 Volt (Standard)
Ş 277	277 Volt

Optional Accessories - See page 216 for details.				
Baffle	Snoots	Louvers	Lenses	

Ordering Example				
FIXTURE TYPE	INTERIOR	WATTAGE	VOLTAGE	
LV1200	BK	50	120	

Combolight LV Series Trimless, 4 Light 12 volt AR111, Black Interior, 50 watt lamps, 120 volts








LV2003IS WH

RECESSED PAR20 "LV" SERIES


- A trimless fixture with lamp holders that adjust at three separate points. Lamps pivot, rotate and slide within the housing.
- Perforated mesh plaster frame can accommodate 1/2" or 5/8" ceiling thickness
- Electrical J-Box located in plaster frame with easy below-ceiling access
- Includes butterfly brackets for black iron installations and hanger tabs for cable suspension

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	11.05″	7.09"	5.30"	8.50" x 8.50"
2 Light	19.75"	7.09"	14.00"	17.20" x 8.50"
3 Light	26.75"	7.09"	21.00"	24.20" x 8.50"
4 Light	33.75"	7.09"	28.00"	31.20" x 8.50"
5 Light	40.75"	7.09"	35.00"	38.20" x 8.50"
6 Light	47.75"	7.09"	42.00"	45.20" x 8.50"
4 Light Square	19.75"	7.09"	14.00" ²	17.20" x 17.20"







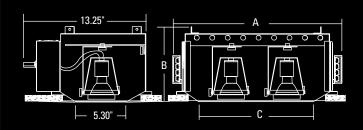

STANDARD "LV" TRIMLESS

Catalog #	Description
LV2010IS	(1) One Light PAR20 120V
E LV2000IS	(2) Two Light PAR20 120V
E LV2003IS	(3) Three Light PAR20 120V
₩ LV2005IS	(4) Four Light PAR20 120V
E LV2050IS	(5) Five Light PAR20 120V
LV2060IS	(6) Six Light PAR20 120V
LV2005SQ	(4) Four Light Square PAR20 120V


œ Catalog #	Description
₽ BK	Black
₩H	White
≅ PT	Custom Color (Specify)

Optional Accessories - See page 216 for details.			
Baffle	Snoots	Louvers	Lenses

Ordering Example	
FIXTURE TYPE	INTERIOR
LV2003IS	WH

Combolight LV Series Trimless, 4 Light 120 volt PAR20, White Interior



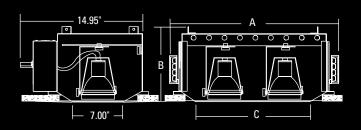

STANDARD "LV" TRIMLESS

Catalog #	Description
LV3010IS	(1) One Light PAR30 120V
LV3000IS	(2) Two Light PAR30 120V
	(3) Three Light PAR30 120V
E LV3005IS	(4) Four Light PAR30 120V
LV30051S LV30050IS LV3060IS	(5) Five Light PAR30 120V
LV3060IS	(6) Six Light PAR30 120V
LV3005SQ	(4) Four Light Square PAR30 120V

2	Catalog #	Description
읉	BK	Black
Ξ	WH	White
2	Catalog # BK WH PT	Custom Color (Specify)

Optional Ac	cessories - S	ee page 216	for details.
Raffla	Snoote	Louvore	Lancac

Ordering Example	
FIXTURE TYPE	INTERIOR
LV3003IS	ВК

Combolight LV Series Trimless, 4 Light 120 volt PAR30, Black Interior




LV3003IS BK

RECESSED PAR30 "LV" SERIES

- A trimless fixture with lamp holders that adjust at three separate points. Lamps pivot, rotate and slide within the housing
- Perforated mesh plaster frame can accommodate 1/2" or 5/8" ceiling thickness
- Electrical J-Box located in plaster frame with easy below-ceiling access
- Includes butterfly brackets for black iron installations and hanger tabs for cable suspension

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	12.77"	8.40"	7.00"	10.25" x 10.25"
2 Light	20.77"	8.40"	15.00"	18.25" x 10.25"
3 Light	27.77"	8.40"	22.00"	25.25" x 10.25"
4 Light	34.77"	8.40"	29.00"	32.25" x 10.25"
5 Light	41.77"	8.40"	36.00"	39.25" x 10.25"
6 Light	48.77"	8.40"	43.00"	46.25" x 10.25"
4 Light Square	20.77"	8.40"	15.00″ ²	18.25" x 18.25"












LV3803IS WH (With Peach Cosmetic Filter)

RECESSED PAR38 "LV" SERIES


- A trimless fixture with lamp holders that adjust at three separate points. Lamps pivot, rotate and slide within the housing
- Perforated mesh plaster frame can accommodate 1/2" or 5/8" ceiling thickness
- Electrical J-Box located in plaster frame with easy below-ceiling access
- Includes butterfly brackets for black iron installations and hanger tabs for cable suspension.

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	14.60"	9.02"	8.90"	12.10" x 12.10"
2 Light	23.50"	9.02"	17.73"	20.82" x 12.10"
3 Light	32.40"	9.02"	26.63"	29.72" x 12.10"
4 Light	41.30"	9.02"	35.53"	38.62" x 12.10"
5 Light	50.20"	9.02"	44.43"	47.52" x 12.10"
6 Light	59.10"	9.02"	53.33"	56.42" x 12.10"
4 Light Square	23.50"	9.02"	17.73" ²	20.93" x 20.93"









STANDARD "LV" TRIMLESS

		Catalog #	Description
		LV3810IS	(1) One Light PAR38 120V
	TYPE	LV3800IS	(2) Two Light PAR38 120V
		LV3803IS	(3) Three Light PAR38 120V
_	FIXTURE	LV3805IS	(4) Four Light PAR38 120V
	ΕX	LV3850IS	(5) Five Light PAR38 120V
	Ξ	LV3860IS	(6) Six Light PAR38 120V
		LV3805ISSQ	(4) Four Light Square PAR38 120V

⊈ Catalog #	Description
2 BK	Black
≝ wh	White
≧ PT	Custom Color (Specify)

Optional Ac	cessories - S	ee page 216	for details.
Baffle	Snoots	Louvers	Lenses

Ordering Example	
FIXTURE TYPE	INTERIOR
LV3803IS	WH

Combolight LV Series Trimless, 4 Light 120 volt PAR38, White Interior



5.30" —

STANDARD "LV" TRIMLESS

Catalog #	Description
LV210MH	(1) One Light PAR20 Metal Halide
LV220MH	(2) Two Light PAR20 Metal Halide
LV230MH	(3) Three Light PAR20 Metal Halide
E LV240MH	(4) Four Light PAR20 Metal Halide
E LV240MH LV250MH	(5) Five Light PAR20 Metal Halide
LV260MH	(6) Six Light PAR20 Metal Halide
LV240MHSQ	(4) Four Light Sq.PAR20 Metal Halide

	catalog #	Description	
9	 BK	Black	
Ĺ	₩H	White	
	≧ PT	Custom Color (Specify)	

造	Catalog #	Description
Ι¥	39	39 Watt PAR20 Metal Halide
LAMP WAT		Configured with Aromat® Electronic Ballasts

	넁	Catalog #	Description
-	≅	120	120 Volt (Standard)
	<u> </u>	Catalog # 120 277	277 Volt

	386
Baffle Snoots Louver	rs Lenses

Ordering Example

LV230MH	BK	39	120
FIXTURE TYPE	INTERIOR	WATTAGE	VOLTAGE

Combolight LV Series Trimless, 4 Light PAR20MH, Black Interior, 39 watt lamps, 120 volts



LV230MH BK 39 120 (With Cross Baffles)


RECESSED PAR20MH "LV" SERIES


- A trimless fixture with lamp holders that adjust at three separate points. Lamps pivot, rotate and slide within the housing
- Perforated mesh plaster frame can accommodate 1/2" or 5/8" ceiling thickness
- Electrical J-Box and Electronic Ballasts* located in plaster frame with easy below-ceiling access.
- Includes butterfly brackets for black iron installations and hanger tabs for cable suspension.

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	11.05″	7.09"	5.30"	8.50" x 8.50"
2 Light	19.75"	7.09"	14.00"	17.20" x 8.50"
3 Light	26.75"	7.09"	21.00"	24.20" x 8.50"
4 Light	33.75"	7.09"	28.00"	31.20" x 8.50"
5 Light	40.75"	7.09"	35.00"	38.20" x 8.50"
6 Light	47.75"	7.09"	42.00"	45.20" x 8.50"
4 Light Square	19.75"	7.09"	14.00″²	17.20" x 17.20"

Five and Six light models use remote ballasts.
















LV330MH WH 70 120


RECESSED PAR30MH "LV" SERIES

- A trimless fixture with lamp holders that adjust at three separate points. Lamps pivot, rotate and slide within the housing
- Perforated mesh plaster frame can accommodate 1/2" or 5/8" ceiling thickness
- Electrical J-Box and Electronic Ballasts* located in plaster frame with easy below-ceiling access.
- Includes butterfly brackets for black iron installations and hanger tabs for cable suspension.


Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	12.77"	8.40"	7.00"	10.25" x 10.25"
2 Light	20.77"	8.40"	15.00"	18.25" x 10.25"
3 Light	27.77"	8.40"	22.00"	25.25" x 10.25"
4 Light	34.77"	8.40"	29.00"	32.25" x 10.25"
5 Light	41.77"	8.40"	36.00"	39.25" x 10.25"
6 Light	48.77"	8.40"	43.00"	46.25" x 10.25"
4 Light Square	20.77"	8.40"	15.00" ²	18.25" x 18.25"

* Five and Six light models use remote ballasts.









STANDARD "LV" TRIMLESS

		Catalog #	scription	
		LV310MH	One Light PAR30	Metal Halide
	TYPE	LV320MH	Two Light PAR30	Metal Halide
		LV330MH	Three Light PAR3	0 Metal Halide
-	ğ	LV340MH	Four Light PAR30	Metal Halide
	FIXTURE	LV350MH	Five Light PAR30	Metal Halide
		LV360MH	Six Light PAR30 N	/letal Halide
		LV340MHSQ	Four Light Sq.PAF	R30 Metal Halide

	9	catalog #	Description
	\$	BK	Black
(White
		≜ PT	Custom Color (Specify)

	넁 Catalog #	Description
	≦ 39	39 Watt PAR30 Metal Halide
3	₹ 70	70 Watt PAR30 Metal Halide
	LAMP V	Configured with Aromat® Electronic Ballasts

	명 Catalog #	Description
)——	≦ 120	120 Volt (Standard)
,	9 277	277 Volt

Optional Accessories - See page 216 for details.						
Baffle	Snoots	Louvers	Lenses			

Ordering Example					
FIXTURE TYPE	INTERIOR	WATTAGE	VOLTAGE		
LV330MHC	WH	70	120		

Combolight LV Series Trimless, 4 Light PAR30MH, White Interior, 70 watt lamps, 120 volts



5.30" —

STANDARD "LV" TRIMLESS

Catalog #	Description
LV210MH	(1) One Light PAR20 Metal Halide
LV220MH	(2) Two Light PAR20 Metal Halide
LV230MH	(3) Three Light PAR20 Metal Halide
E LV240MH	(4) Four Light PAR20 Metal Halide
E LV240MH LV250MH	(5) Five Light PAR20 Metal Halide
LV260MH	(6) Six Light PAR20 Metal Halide
LV240MHSQ	(4) Four Light Sq.PAR20 Metal Halide

	catalog #	Description	
2	 BK	Black	
ے	₩H	White	
	≧ PT	Custom Color (Specify)	

造	Catalog #	Description
Ι¥	39	39 Watt PAR20 Metal Halide
LAMP WAT		Configured with Aromat® Electronic Ballasts

	넁	Catalog #	Description
-	≅	120	120 Volt (Standard)
	<u> </u>	Catalog # 120 277	277 Volt

	990
Baffle Snoots Louve	ers Lenses

Ordering Example

LV230MH	BK	39	120
FIXTURE TYPE	INTERIOR	WATTAGE	VOLTAGE

Combolight LV Series Trimless, 4 Light PAR20MH, Black Interior, 39 watt lamps, 120 volts



LV230MH BK 39 120 (With Cross Baffles)

RECESSED PAR20MH "LV" SERIES

- A trimless fixture with lamp holders that adjust at three separate points. Lamps pivot, rotate and slide within the housing
- Perforated mesh plaster frame can accommodate 1/2" or 5/8" ceiling thickness
- Electrical J-Box and Electronic Ballasts* located in plaster frame with easy below-ceiling access.
- Includes butterfly brackets for black iron installations and hanger tabs for cable suspension.

Fixture Configuration	A Length	B Height	C Aperture Length	Ceiling Cut-out
1 Light	11.05″	7.09"	5.30"	8.50" x 8.50"
2 Light	19.75"	7.09"	14.00"	17.20" x 8.50"
3 Light	26.75"	7.09"	21.00"	24.20" x 8.50"
4 Light	33.75"	7.09"	28.00"	31.20" x 8.50"
5 Light	40.75"	7.09"	35.00"	38.20" x 8.50"
6 Light	47.75"	7.09"	42.00"	45.20" x 8.50"
4 Light Square	19.75"	7.09"	14.00″²	17.20" x 17.20"

Five and Six light models use remote ballasts.



