










































# Cross-Colors

PORCELAIN STONE

					
A235 Sahara Dune* II	C310 Bamboo III	A236 Flax II	C360 Maple Sugar I	B380 Sunflower	A375 Saffron II
					
A215 Empress White* I	B120 Peach Fresco	A238 Shetland II	B230 Zeolite	B220 Doeskin	A660 Rosewood I
					
A291 Pepper Quartz* II	A260 Pebble II	A233 Sand Bisque* AC	A675 Stonehenge* AC	A634 Terra Rosata I	A790 Burgundy Smoke* AC
					
B100 Greige	C370 Featherstone I	A658 Fawn I	A876 Truffle* I	A870 Seal Taupe* I	B190 Amethyst
					
A745 Tawny II	A760 Spice Mist* I	A750 Brown Tweed I	A740 Nutmeg I	B110 Antico Taupe	
					
210 Seabreeze	C400 Bayberry III	A485 Rain Forest II	B200 Primavera	A410 Greenbriar II	B481 Forest Green
					
A246 Pacific Surf II	C483 Windsurf III	A830 Atlantic Grey I	B180 Lapis	A585 Sea Mist* II	B580 Ocena

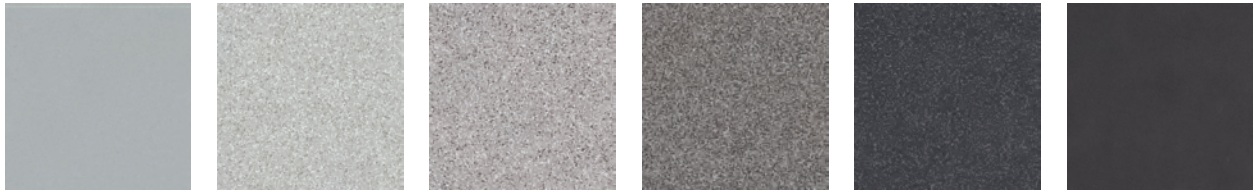
### Price Groups

AC	American Classics
I	Group I
II	Group II
III	Group III

• The codes for A-Series tile shown above begin with the letter "A". The codes for B-Series and C-Series tile begin with the letters "B" and "C" respectively.

# Cross-Colors

PORCELAIN STONE



C810 Platinum I A825 Mercury AC A900 Mica\* AC A850 Graphite\* AC A880 Onyx\* II A890 Ebony III

## Sizes Available

Surface/Texture	Size	Actual Size	Thickness
UPS/PO	6 x 6 (c & b)	5-3/4 x 5-3/4	5/16
UPS/PO	8 x 8 (a & c)	7-3/4 x 7-3/4	5/16
UPS/UP/PO	12 x 12	11-3/4 x 11-3/4	5/16

\* These colors are inventoried in c & b 6" x 6", UPS finish, at Crossville.  
 All other 6" x 6" colors and finishes are special order.  
 Note: The 6" x 6" c & b tile is cut from 12" x 12" tile and the edges are beveled to provide a factory appearance. Please allow two to eight weeks for delivery depending on Crossville's production schedule.

## Recommended Usage

Crossville Porcelain Stone products are recommended for interior walls and floors and exterior walls in both residential and commercial applications.

## Care and Maintenance

Regular cleaning is the best way to keep your porcelain stone looking new for years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed. More information regarding the care and maintenance of Crossville products is available at [www.crossvilleinc.com](http://www.crossvilleinc.com).




EC001 (UPS) EcoCycle Storm† comes in 8 x 8 only

† Coordinating 6" x 8" Cove Base, 6" x 8" Cove Base Corners and 1" x 6" inside/outside Cove Base Corner available.

## Shade & Texture Index

Cross Colors has a shade variation of V1  
 V1 = Uniform Appearance



## Cross-Colors Trim

### A Series Trim Program (available in UPS finish only)

(all sizes in inches)

Size	A Series Trim Program							B Series Trim Program		C Series Trim Program	
	Cove Base	Inside & Outside Cove Base Corners	Factory Left Cove Base	Factory Right Cove Base	Bullnose	Right & Left Bullnose Corners	Bullnose Stair Tread	Bullnose	Bullnose	Right & Left Bullnose Corners	
Actual Size	6 x 8	1 x 6	6 x 8	6 x 8	4 x 8	4 x 8	4 x 8	4 x 8	4 x 8	4 x 8	
Thickness	5/16	—	5/16	5/16	5/16	5/16	5/16	5/16	5/16	5/16	

## Cross Colors Performance Data

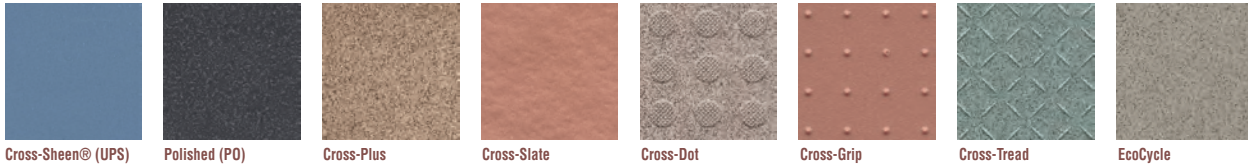
	Water Absorption	Abrasive Wear	Breaking Strength	Bond Strength	Coefficient of Friction COF >Dry	Coefficient of Friction COF >Wet	Facial Dimensions Range	Range of Thickness	Warpage (Diagonal)	Wedging	Frost Resistance	Chemical Resistance	Scratch Hardness
A Series Cross-Sheen (UPS)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.6	0.6	0.20% Max.	0.011 Max.	±0.20%	Max. 0.50% Max.	Resistant	Unaffected	6
A Series Cross-Sheen (PO)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.6	N/A	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	5
B Series Colors (UPS)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.6	>0.6	0.20% Max.	0.011 Max.	±0.22% Max.	0.50% Max.	Resistant	Unaffected	6
B Series Colors (PO)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.6	N/A	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	5
C Series Colors (UPS)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.6	>0.6	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	6
C Series Colors (PO)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.6	N/A	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	5
Cross-Colors LP (UPS)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.6	>0.6	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	6
Cross-Colors LP (PO) <	0.10%	270-330	350-420 lbf.	>200psi.	>0.6	N/A	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	5
Cross-Plus (CP)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.8	>0.7	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	9
Cross-Tread (CTS)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.8	>0.8	0.20% Max.	N/A	±0.20% Max.	0.50% Max.	Resistant	Unaffected	6
Cross-Dot (CD)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.9	>0.8	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	6
Cross-Grip (CGS)	<0.10%	270-330	350-420 lbf.	>200psi.	>1.2	>1.0	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	6
Cross-Slate (CS)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.8	>0.7	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	6
Eco-Cycle (R)	<0.10%	250-275	350-420 lbf.	>200psi.	>0.6	>0.6	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	6
Cross-Colors Mosaics (UPS)	<0.10%	270-330	>275 lbf.	>200psi.	>0.6	>0.6					Resistant	Unaffected	6
Cross-Colors Mosaics (GL)	<0.10%		>275 lbf.	>200psi.							Resistant	Unaffected	5
Cross-Colors Mosaics (CTS)	<0.10%	270-330	>275 lbf.	>200psi.	>0.8	>0.6					Resistant	Unaffected	6



# Cross-Colors - Finishes and Textures

PORCELAIN STONE

Crossville offers designers, architects and builders the utilitarian textures to answer the specific needs of those areas with the highest exposure. These textures are an integral part of the tile and cannot be worn down. No matter how technical the specifications, we have a surface that is highly functional, yet able to blend beautifully with any design application.



**Cross-Sheen® (UPS)** finish imparts a subtle glow that enhances the color of the tile and also allows stains and scuff marks to be easily wiped off the surface. This remarkable finish is on every tile Crossville manufactures. Cross-Sheen is recommended for interior floors and walls and exterior walls, including high-traffic areas and areas where a low level of maintenance is desired. Cross-Sheen is not recommended for exterior horizontal surfaces or exterior paving.

**Polished (PO)** porcelain stone is an attractive and practical alternative to natural stone. Interplay with CROSS-SHEEN® or other surface textures to increase visual interest. Polished finishes are recommended for interior floors and walls and exterior walls, including areas where a look of elegance and sophistication is desired. Polished tile is not recommended for wet areas or areas where standing water may accumulate. Polished finishes are not recommended for exterior horizontal surfaces or exterior paving.

**Cross-Plus** - Meeting an industry-wide need for tiles with a high coefficient of friction yet smooth finish, Cross-Plus is extremely easy to maintain and clean: no sealers, waxes or other surface treatments are required. Use it where you want the good looks of porcelain tile and need the durability and assurance of a utility surface. Cross-Plus is not recommended for areas where water or grease may accumulate. In those areas, choose from Cross-Grip, Cross-Tread or Cross-Dot.

**Cross-Slate** Molded from slabs of natural slate, Cross-Slate looks highly realistic, yet it's more slip resistant than some other textured tiles. Cross-Slate is also



















durable and easy to keep clean. Cross-Slate can be used where you want the high-end look of porcelain stone tile, but need the durability of a utility surface.

**Cross-Dot** - The raised-dot pattern, with a "roughened" surface atop each dot, provides increased coefficient of friction for safer footing where slips and falls are of the greatest concern. It's ideal for commercial kitchens, food prep areas, service stations and other back-of-the-house areas.

**Cross-Grip** Developed in conjunction with restaurant owners, Cross-Grip is the solution for those areas where slips and falls are of greatest concern. The raised-point texture earned Cross-Grip the highest possible performance rating in the National Restaurant Association's testing for slip resistance. It's ideal for areas where grease, food, oil and other residue tend to accumulate.

**Cross-Tread** Increased slip resistance and ease of maintenance make this tile an excellent choice for wet and greasy floor areas, as well as for exterior walking surfaces. The Cross-Tread surface pattern is eye-catching, making it a great option for transitional areas and for use as an accent tile. Available in 8" x 8" and 3" x 3" Cross-Colors Mosaics. Cross-Tread meets ADA guidelines.

**EcoCycle** Storm EC001 is available in slip-resistant Cross-Tread and in the smooth Cross-Sheen surface. The name says it all. Made from 40% recycled materials, EcoCycle combines added environmental friendliness with all the pluses of Crossville's porcelain stone tiles. It's a Home Magazine Award Winner, recognized for its durability, easy maintenance and environmental benefits.

					
A215 Empress White Cross-Plus 6 x 6 c&b 8 x 8 12x12	A260 Pebble Cross-Plus 6 x 6 c & b 8 x 8 12x 12 Cross-Tread 8 x 8	A233 Sand Bisque Cross-Plus 6 x 6 c & b 8 x 8 12x 12 Cross-Slate 6 x 6 c & b 8 x 8 12x 12 Cross-Tread 8 x 8	A291 Pepper Quartz Cross-Plus 6 x 6 c & b 8 x 8 12x 12	A585 Sea Mist Cross-Slate 6 x 6 c & b 8 x 8 12x 12 Cross-Tread 8 x 8	A876 Truffle Cross-Plus 6 x 6 c&b 8 x 8 12x12 Cross-Slate 6 x 6 c & b 8 x 8 12x 12
					
A675 Stonehenge Cross-Plus 6 x 6 c&b 8 x 8 12x12 Cross-Slate 6 x 6 c & b 8 x 8 12x 12 Cross-Dot 8 x 8 Cross-Grip 8 x 8 Cross-Tread 8 x 8	A790 Burgundy Smole Cross-Dot 8 x 8 Cross-Grip 8 x 8 Cross-Tread 8 x 8	A900 Mica Cross-Plus 6 x 6 c & b 8 x 8 12x 12 Cross-Slate 6 x 6 c & b 8 x 8 12x 12 Cross-Dot 8 x 8 Cross-Grip 8 x 8 Cross-Tread 8 x 8	A850 Graphite Cross-Plus 6 x 6 c & b 8 x 8 12x 12 Cross-Slate 6 x 6 c & b 8 x 8 12x 12 Cross-Dot 8 x 8 Cross-Grip 8 x 8 Cross-Tread 8 x 8	A825 Mercury Cross-Plus 6 x 6 c & b 8 x 8 12x 12 Cross-Slate 6 x 6 c & b 8 x 8 12x 12 Cross-Tread 8 x 8	A750 Brown Tweed Cross-Slate 6 x 6 c & b 8 x 8 12x12 Cross-Tread 6 x 6 c & b 8 x 8
					
A880 Onyx Cross-Slate 6 x 6 c & b 8 x 8 12x 12 Cross-Tread 8 x 8	A634 Terra Posata Cross-Plus 6 x 6 c & b 8 x 8 12x 12 Cross-Grip 8 x 8	A745 Tawny Cross-Plus 6 x 6 c & b 8 x 8 12x 12	A410 Greenbriar Cross-Tread 8 x 8	A660 Rosewood Cross-Tread 8 x 8	EC001 EcoCycle Storm Cross-Tread 8 x 8

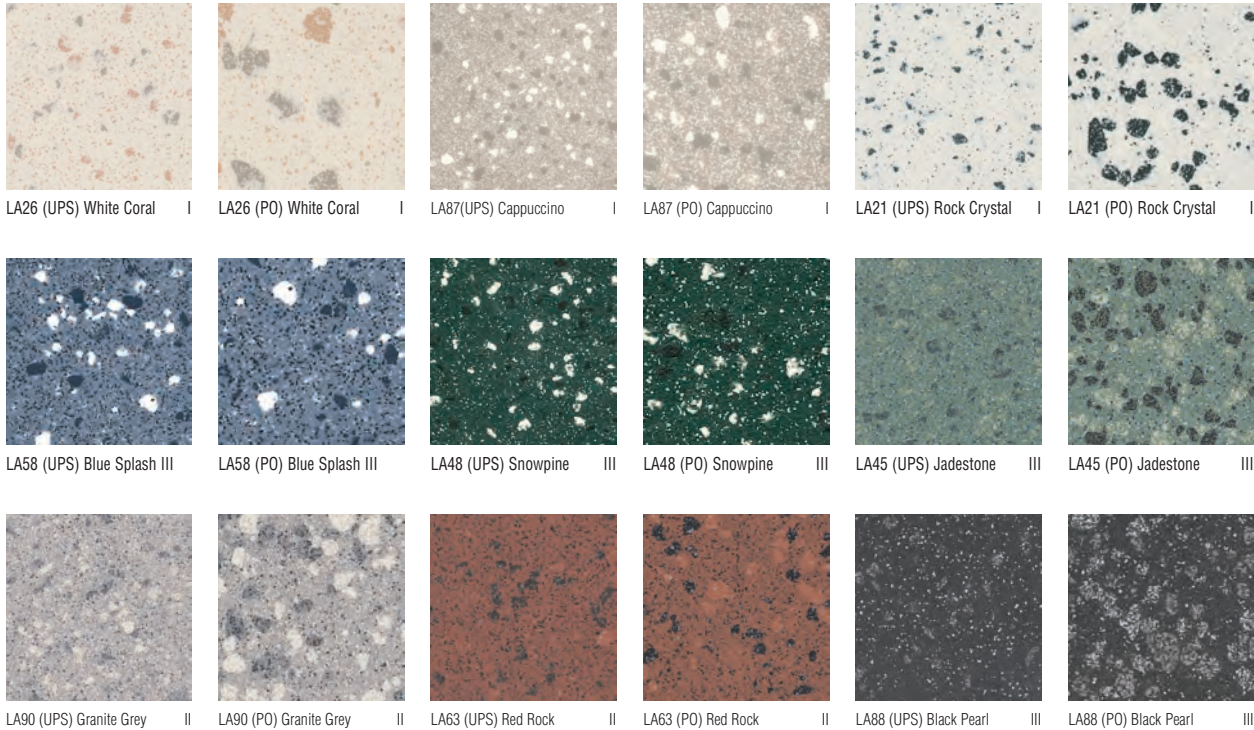
# Cross-Colors LP

PORCELAIN STONE

- Splashed with colors that easily harmonize with other solids and other surface visuals
- Cross-Colors LP are designed to offer the good looks of natural granite anywhere you want the good behavior of porcelain stone tiles.
- Available with a soft Cross-Sheen finish, or polished

to a brilliant sparkle, porcelain stone is 30% harder and more durable than natural granite.

- Crossville's Cross-Grid process is especially effective with Cross-Colors LP: with all sides custom-ground precisely square, our large-particle tiles can be installed as seamlessly as natural granite.



## Sizes Available

Surface/Texture	Size	Actual Size	Thickness
UPS/PO	6 x 6 c & b	5-3/4 x 5-3/4	5/16
UPS/PO	12 x 12	11-3/4 x 11-3/4	5/16

Note: The "6" x 6" c & b tile is cut from 12" x 12" tile and the edges are beveled to provide a factory appearance. Please allow two to eight weeks for delivery depending on Crossville's production schedule.

## Recommended Usage

Crossville Porcelain Stone products are recommended for interior walls and floors and exterior walls in both residential and commercial applications. The polished tile is not recommended for wet areas or areas where standing water may accumulate.


## Care and Maintenance

Regular cleaning is the best way to keep your porcelain stone looking new for

years to come. Use clean, hot water (combined with a household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed. More information regarding the care and maintenance of Crossville products is available at [www.crossvilleinc.com](http://www.crossvilleinc.com).

## Shade & Texture Index

Cross Colors has a shade variation of V1



V1 = Uniform Appearance

## Cross Colors Performance Data

	Water Absorption	Abrasive Wear ( )	Breaking Strength	Bond Strength	Coefficient of Friction COF >Dry	Coefficient of Friction COF >Wet	Facial Dimensions Range	Range of Thickness	Warpage (Diagonal)	Wedging	Frost Resistance	Chemical Resistance	Scratch Hardness
Cross-Colors LP (UPS)	<0.10%	270-330	350-420 lbf.	>200psi.	>0.6	>0.6	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant	Unaffected	6
Cross-Colors LP (PO) <	0.10%	270-330	350-420 lbf.	>200psi.	>0.6	N/A	0.20% Max.	0.011 Max.	±0.20% Max.	0.50% Max.	Resistant		5



Crossville, Inc. • P.O. Box 1168, Crossville, TN 38557  
Phone: 931.484.2110 • Fax: 931.456.2956  
E-Mail: [crossc@crossvilleinc.com](mailto:crossc@crossvilleinc.com) • [www.crossvilleinc.com](http://www.crossvilleinc.com)