


X-TEND® Flexible Stainless Steel Mesh 4.0mm available sizes

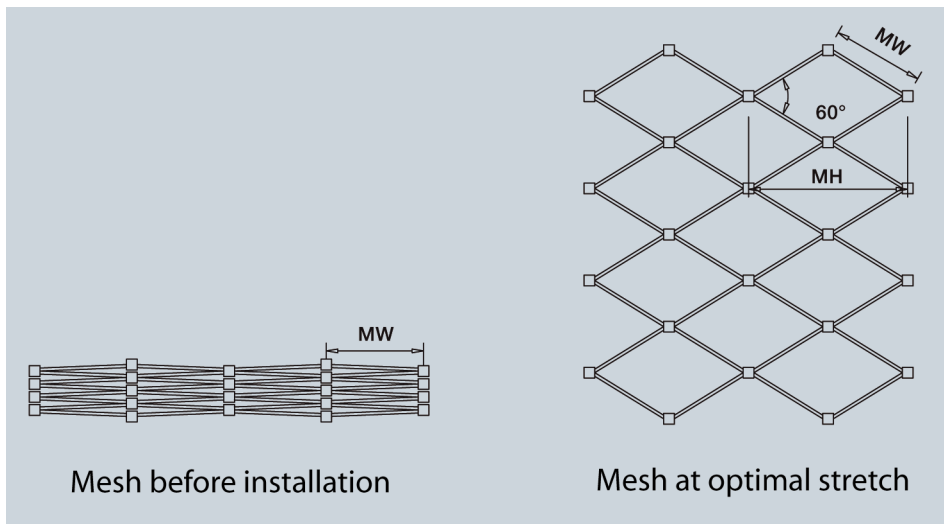

| Rope Diam. mm | Mesh Width mm MW | Optimal Mesh Height mm MH | Rectangular Application DCI Item # | Diagonal Application DCI Item # |
|------------------|------------------------|---------------------------------|---------------------------------------|------------------------------------|
|------------------|------------------------|---------------------------------|---------------------------------------|------------------------------------|

X-TEND® with Tinned Copper Seamless Ferrules

| | | | | |
|---|-----|-----|----------|----------|
| 4 | 70 | 121 | CX040070 | CX240070 |
| 4 | 100 | 173 | CX040100 | CX240100 |
| 4 | 140 | 242 | CX040140 | CX240140 |
| 4 | 200 | 346 | CX040200 | CX240200 |

X-TEND® with AISI 316L SS Seamless Ferrules

| | | | | |
|---|-----|-----|-----------|-----------|
| 4 | 70 | 121 | CXE040070 | CXE240070 |
| 4 | 100 | 173 | CXE040100 | CXE240100 |
| 4 | 140 | 242 | CXE040140 | CXE240140 |
| 4 | 200 | 346 | CXE040200 | CXE240200 |

Other sizes upon request. Consult your salesperson for details.
7x19 AISI 316 Stainless Steel Wire Rope



e-mail: sales@decorcable.com
Toll Free: (800)444-6271

© Copyright 2007 Carl Stahl DécorCable