

**Four Station Wall Mounted Wash Sink  
With Sensor Faucets, AC Powered  
Models EWMA9620SACC,  
EWMA9620SACMC and EWMA9620SACTMC**



**SPECIFICATIONS**


**GENERAL**

**EWMA9620** #14 gauge, type 304 (18-8) stainless steel four station wash sink with 1/4" (6mm) radius coved corners. 1-1/2" (38mm) wide sloping top channel rims, with 2" (51mm) flat apron. Full length 10" (254mm) high backsplash. Rim corners are square. Exposed surfaces are hand blended to a uniform satin luster finish. Furnished with wall hangers and stainless steel support brackets.

(CHECK MODEL SPECIFIED)

MODEL	FAUCET	DRAIN	MIXING VALVE
<input type="checkbox"/> EWMA9620SACC	LK722AC (4)	LK18B	NONE
<input type="checkbox"/> EWMA9620SACMC	LK722AC (4)	LK18B	LK724 (4)
<input type="checkbox"/> EWMA9620SACTMC	LK722AC (4)	LK18B	LK723 (4)

**LK722AC** Sensor-operated, non-mixing (tempered water), backsplash-mounted gooseneck faucet with adjustable sensor eyes. A continuous beam is emitted from sensor. The sensor faucet is activated by user placing hands under the spout. Tempered water will flow as long as hands remain within sensor range. When hands are removed, the water stops automatically based on shut off delay settings. The sensor then resets and is ready for the next user. AC powered, chrome plated - solid brass body construction and 12-3/4" (324mm) high (bottom of base to top of spout), 8-3/4" (222mm) from aerator to base, 5-3/8" (137mm) reach C.P. spout with 2.0 gpm laminar flow control on spout end. Includes vandal-resistant, water-resistant sensor control module with armored vandal-resistant control and power cables. LK730 wire lead allows contractor to connect each control box to one LK727 multi-unit power adapter. Depending on the location of the LK727, 20-22 gauge wire (not supplied) may be required from LK730 to LK727. Slow-closing piston operated solenoid valve, in-line filter with

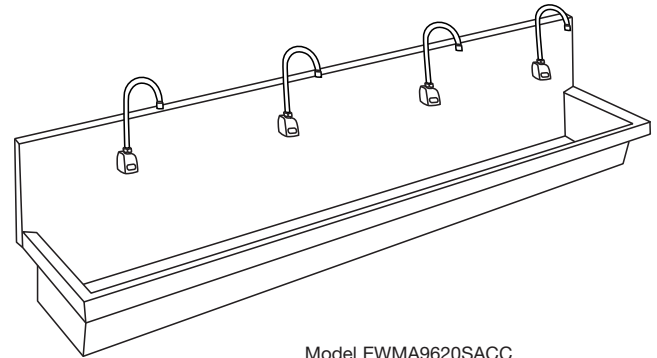

Model EWMA9620SACC

clean out trap, and 3/8" (10mm) copper fittings for supply tube furnished by contractor. Control circuit is solid state, has adjustable sensor range (6" [152mm] preset to 30" [762mm]), shut off delay preset at 1 second and field adjustable to 2, 4 or 8 seconds, and automatic time-out feature (to prevent sink overflow) is preset at 0 seconds and is field adjustable to 15, 30 or 60 seconds.


**LK18B** Stainless steel perforated grid strainer with 1-1/2" (38mm) O.D. stainless steel tailpiece.

**LK723** Anti-scald thermostatic mixing valve with nickel-plated brass body 1/2" (13mm) SWT inlets and outlet connections, check valves on inlets and a mixed temperature range of 80°- 120°F. Certified under ASSE1016.

**LK724** Mechanical mixing valve with C.P. brass body, 3/8" (10mm) compression inlets and outlet connections, and check valves on inlets.

**DIMENSIONS**

Model Number	A		B		C		D		E		F		G		H		I		J		K	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
EWMA9620	96	2438	20	508	93	2362	16 1/2	419	48	1219	1 1/2	38	10	254	2	51	24	610	12	305	8	203

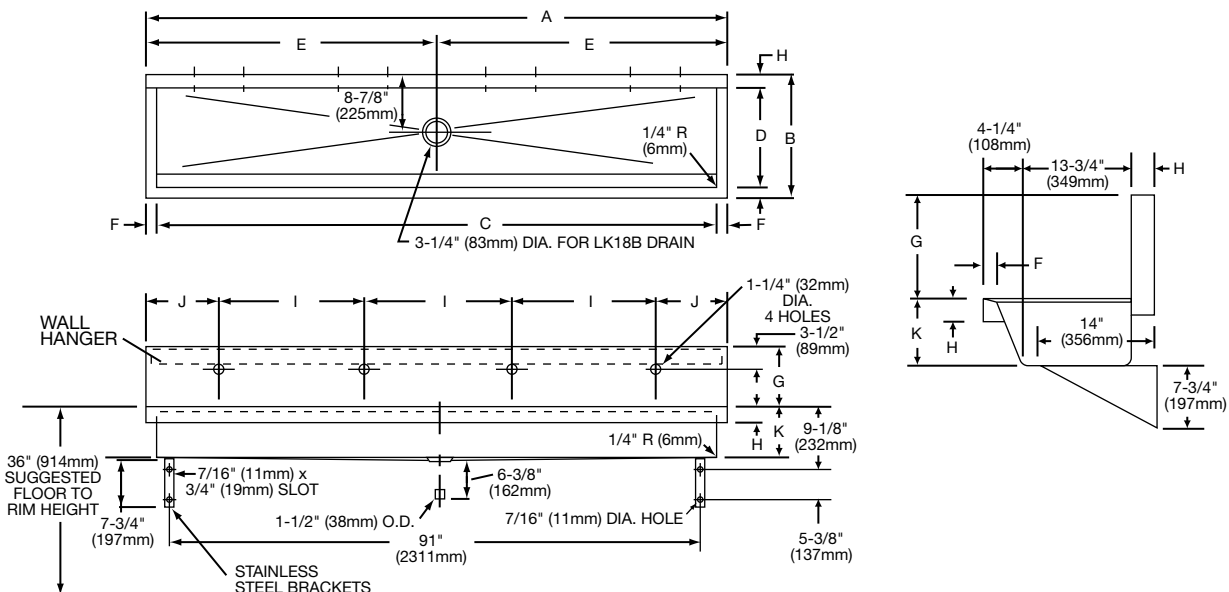

**Four Station Wall Mounted Wash Sink  
With Sensor Faucets, AC Powered  
Models EWMA9620SACC,  
EWMA9620SACMC and EWMA9620SACTMC**





**ROUGH-IN DIMENSIONS**

**DIMENSIONS**

Model Number	A		B		C		D		E	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
EWMA9620	24	610	12	305	4	102	10	254	5	127

NOTE:  
ALL FASTENERS  
SUPPLIED BY OTHERS

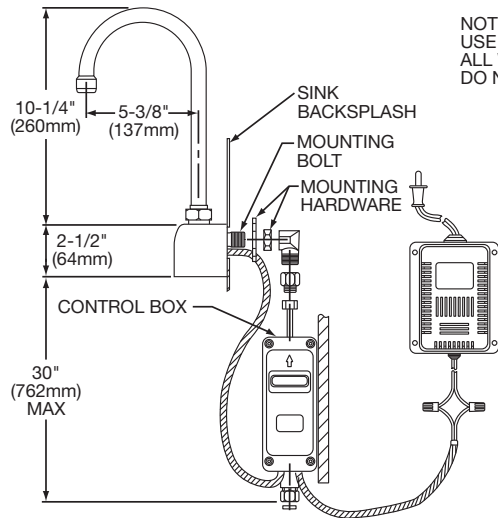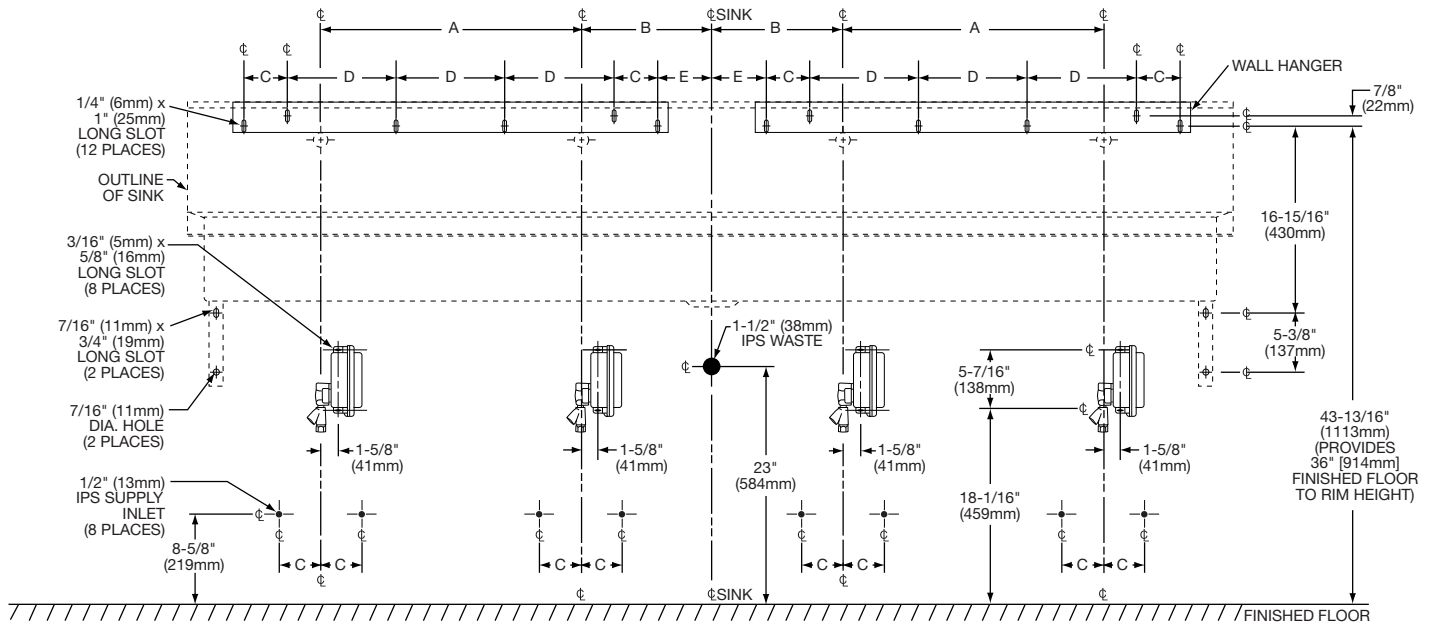

NOTE:  
USE TEFLON TAPE FOR  
ALL WATER CONNECTIONS.  
DO NOT USE PIPE DOPE.

