



GENERAL

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel. Top mount.

DESIGN FEATURES

Bowl Depths: 6-1/8" (156mm) (BLR[Q]1560), 7-1/8" (181mm) (all others).

Coved Corners: 1-3/4" (44mm) vertical and horizontal radius. Bowl and Faucet Deck Recess: 3/16" (5mm) below outside edge of sink.

Finish: Exposed surfaces are hand blended to a lustrous satin finish.

Underside: Fully undercoated to dampen sound and reduce condensation.

These sinks comply with ASME A112.19.3-2008/CSA B45.4-08.



These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.

SINK PACKAGES

BLH15C Package includes:

- (1) **BLR15** Sink.
- (1) **LKDA2438** Faucet.
- (1) LK36 Basket strainer.

BLR150C Package includes:

- (1) BLR15 Sink.
- (1) **LKD2223** Faucet.
- (1) LK36 Basket strainer.

OTHER

Drain Openings: 3-1/2" (89mm) (BLR[Q]1516), 2" (51mm) (all others).

NOTE: Unless otherwise specified, sink is furnished with 1 faucet hole as shown.

OPTIONAL ACCESSORIES

Bottom Grid: LKWBG12090SS (BLH15C, BLR150C, BLR[Q]15, BLR[Q]1560).


Cutting Board: CB912.

Drains: LK36 (BLH15C, BLR150C, BLR[Q]15, BLR[Q]1560), LK99 (BLR[Q]1516)

Installation hardware for thicker countertops: LK363 (up to 1-1/2" [38mm] thick); LK463 (up to 2-1/2" [66mm] thick).

Rinsing Basket: LKWRB1209SS.

Utensil Caddy for Rinsing Basket: LKWUCSS.

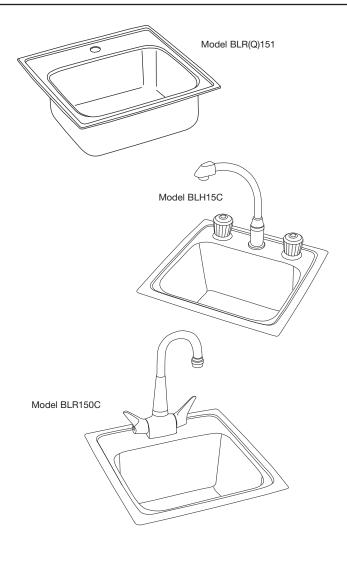

SEE OTHER SIDE FOR PRODUCT DIMENSIONS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.


This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.



SINK DIMENSIONS*

U-Channel	Quick-Clip [®] Model Number	Overall L W		Inside Bowl			Cutout in Countertop (1 ¹ / ₂ " [38mm] Radius Corners)			No. of 1 ¹ /4" (32mm) or 1 ¹ /2" (38mm) Dia.	Minimum
Model Number		A	B	C	D	E	L	W	Drain Opening	Faucet Holes 4" (102mm) Centers	Cabinet Size
BLH15C	_	15 (381mm)	15 (381mm)	12 (305mm)	9 ¹ / ₄ (235mm)	7 ¹ / ₈ (181mm)	14 ³ / ₈ (365mm)	14 ³ / ₈ (365mm)	2 (51mm)	3	18 (457mm)
BLR150C	_	15 (381mm)	15 (381mm)	12 (305mm)	9 ¹ / ₄ (235mm)	7 ¹ / ₈ (181mm)	14 ³ / ₈ (365mm)	14 ³ / ₈ (365mm)	2 (51mm)	1	18 (457mm)
BLR15	BLRQ15	15 (381mm)	15 (381mm)	12 (305mm)	9 ¹ / ₄ (235mm)	7 ¹ / ₈ (181mm)	14 ³ / ₈ (365mm)	14 ³ / ₈ (365mm)	2 (51mm)	1, 2, MR2 or 3	18 (457mm)
BLR1516	BLRQ1516	15 (381mm)	15 (381mm)	12 (305mm)	9 ¹ / ₄ (235mm)	7 ¹ / ₈ (181mm)	14 ³ / ₈ (365mm)	14 ³ / ₈ (365mm)	3½ (89mm)	1, 2, MR2 or 3	18 (457mm)
BLR1560	BLRQ1560	15 (381mm)	15 (381mm)	12 (305mm)	9 ¹ / ₄ (235mm)	6 ¹ / ₈ (156mm)	14 ³ / ₈ (365mm)	14 ³ / ₈ (365mm)	2 (51mm)	1, 2, MR2 or 3	18 (457mm)

^{*}Length is left to right. Width is front to back.



HOLE DRILLING CONFIGURATIONS 1 (1-1/4" [32mm] diameter) 4" (102mm) 2 (1-1/4" [32mm] diameter) 4" (102mm) MR2 (1-1/2" [38mm] diameter) 4" 4" (102mm)(102mm) 3 (1-1/2" [38mm] diameter)

U-Channel Type Mounting System

