

### **GENERAL**

Fine quality Pacemaker double bowl hospitality sink seamlessly drawn of #20 gauge, type 304 (18-8) nickel bearing stainless steel. Self-rimming.

## **DESIGN FEATURES**

Bowl Depths: 7-1/4" (PSR3319 and PSR4322), 7-1/2" (PSR3321).

Coved Corners: 1-3/4".

Bowl and Faucet Deck Recess: 3/16" drop ledge.

Finish: Exposed surfaces are polished to a lustrous, highlighted

bright satin finish.

Underside: Fully undercoated to prevent condensation and deaden sound. PSR3321 underside is fully protected by heavy duty Sound Guard® undercoating.

### **OTHER**

Drain Openings: 3-1/2".

Faucet Holes: Available with 0, 1, 2, MR2, 3, 4 or 5, 1-1/2"

diameter faucet holes 4" centers.

NOTE: Unless otherwise specified, sink is furnished with 4

faucet holes.

These sinks comply with ANSI Standard A112.19.3M.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.

### **SINK DIMENSIONS (INCHES)\***

Overall		Inside Each Bowl			Cutout in Countertop (1¹/2" Radius		No. of 1 <sup>1</sup> / <sub>2</sub> " Dia.	Minimum	Chin
L	W	L	W	D		ners)	Holes	Cabinet	Ship. Wt. Lbs.
		_			323%				16
									17
	22	19	16	-	423/8	213/8			20
	Ov L A 33 33 43	L W A B 33 19½ 33 21¼	L         W         L           A         B         C           33         19½         14           33         21¼         13½	Overall         Each Bo           L         W         L         W           A         B         C         D           33         19½         14         14           33         21¼         13½         16	Overall         Each Bowl           L         W         L         W         D           A         B         C         D         E           33         19½         14         14         7¼           33         21¼         13½         16         7½	Uverall         Inside Each Bowl         Coun (1½" Coun (1½" Corn           L         W         L         W         D         Corn           A         B         C         D         E         L           33         19½         14         14         7¼         32%           33         21¼         13½         16         7½         32%	Use a link link link link link link link link	Uverall         Inside Each Bowl         Countertop (11/p" Radius Faucet Holes           L         W         L         W         D         Countertop (11/p" Radius Corners)         Countertop (11/p" Radius Faucet Holes         4" Center           33         19½         14         14         7¼         32%         187%         1, 2, MR2, 3, 4 or 5           33         21¼         13½         16         7½         32%         20%         1, 2, MR2, 3, 4 or 5	Uverall         Inside Each Bowl         Countertop (11/2" Radius Corners)         No. of 11/2" Dia. Faucet Holes           L         W         L         W         D         Corners)         W         Holes 4" Center         Minimum Cabinet Size           33         19½         14         14         7¼         32¾         18½         1, 2, MR2, 3, 4 or 5         36           33         21¼         13½         16         7½         32¾         20½         1, 2, MR2, 3, 4 or 5         36


<sup>\*</sup>Length is left to right. Width is front to back...



Model PSR33214 Illustrated

# Model PSR33214

# HOLE DRILLING CONFIGURATIONS

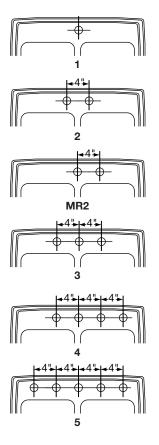

# ALL DIMENSIONS IN INCHES, TO CONVERT TO MILLIMETERS MULTIPLY BY 25.4.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.