

# Pursuit™ Outdoor Top Mount Sinks Models POD Series

#### **GENERAL**

Highest quality sink formed of #18 (1.2mm) gauge, type 316 nickel bearing stainless steel with corrosion resistant hardware. Top mount.

### **DESIGN FEATURES**

Bowl Depth: See chart below.

Coved Corners: 1-3/4" (44mm) vertical and horizontal radius.

Bowl and Faucet Deck Recess: 3/16" (5mm) below outside edge of sink. Models POD2522 and POD3322 have a raised faucet deck and 3/8" (10mm) drop ledge.

Finish: Exposed surfaces are hand blended to a lustrous satin

Underside: Fully protected by heavy duty enhanced Sound Guard® Plus undercoating to dampen sound and reduce condensation.


### **OTHER**

Drain Opening: 3-1/2" (89mm). Recommended Drain: LK335, LK372.

NOTE: Unless otherwise specified, sink POD1516 and POD191910 are furnished with 3 faucet holes, all others are

furnished with 4 faucet holes as shown.

These sinks comply with ASME A112.19.3-2008/CSA B45.4-08.

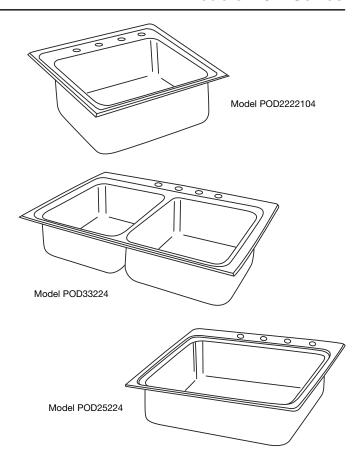

### **SINK DIMENSIONS\***

		Overall L W		Inside Each Bowl			Cutout in Countertop [11/2" (38mm) Radius Corners]		No. of 1 <sup>1</sup> / <sub>2</sub> " (38mm) Dia. Faucet Holes	Minimum
Model Number	Number of Bowls	A	В	C	D D	E	L	W	4" (102mm) Center	Cabinet Size
POD1516	1	15 (381mm)	15 (381mm)	12 (305mm)	9 <sup>1</sup> / <sub>4</sub> (235mm)	7 <sup>1</sup> / <sub>8</sub> (181mm)	14 <sup>3</sup> / <sub>8</sub> (365mm)	14 <sup>3</sup> / <sub>8</sub> (365mm)	1, 2, MR2, 3	18 (457mm)
POD191910	1	19 <sup>1</sup> / <sub>2</sub> (493mm)	19 (483mm)	16 (406mm)	13 <sup>1</sup> / <sub>2</sub> (343mm)	10 <sup>1</sup> / <sub>8</sub> (257mm)	18 <sup>7</sup> / <sub>8</sub> (479mm)	18 <sup>3</sup> / <sub>8</sub> (467mm)	1, 2, MR2, 3, 0S4	24 (610mm)
P0D222210	1	22 (559mm)	22 (559mm)	19 (483mm)	16 (406mm)	10 <sup>1</sup> / <sub>8</sub> (257mm)	21 <sup>3</sup> / <sub>8</sub> (543mm)	21 <sup>3</sup> / <sub>8</sub> (543mm)	1, 2, MR2, 3, 4, 5	27 (686mm)
P0D2522	1	25 (635mm)	22 (559mm)	21 (533mm)	15 <sup>3</sup> / <sub>4</sub> (400mm)	8 <sup>1</sup> / <sub>8</sub> (206mm)	24 <sup>3</sup> / <sub>8</sub> (619mm)	21 <sup>3</sup> / <sub>8</sub> (543mm)	1, 2, MR2, 3, 4, 5	30 (762mm)
P0DS3322	1	33 (838mm)	22 (559mm)	28 (711mm)	16 (406mm)	7 <sup>5</sup> / <sub>8</sub> (194mm)	32 <sup>3</sup> / <sub>8</sub> (822mm)	21 <sup>3</sup> / <sub>8</sub> (543mm)	1, 2, MR2, 3, 4, 5	36 (914mm)
P0D3322	2	33 (838mm)	22 (559mm)	13 <sup>1</sup> / <sub>2</sub> (343mm)	16 (406mm)	8 <sup>1</sup> / <sub>8</sub> (206mm)	32 <sup>3</sup> / <sub>8</sub> (822mm)	21 <sup>3</sup> / <sub>8</sub> (543mm)	1, 2, MR2, 3, 4, 5	36 (914mm)


<sup>\*</sup>Length is left to right. Width is front to back.

SEE OTHER SIDE FOR MORE PRODUCT DIMENSIONS.

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit elkayusa.com for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.






1-3/4"
(44mm) R

1-3/4"
(44mm) R

E


(44mm) R




Model POD15163 Illustrated


Model POD191910OS4 Illustrated

Model POD2222104 Illustrated



Model PODS33224 Illustrated







Model POD33224 Illustrated



## SINGLE BOWL HOLE DRILLING CONFIGURATIONS

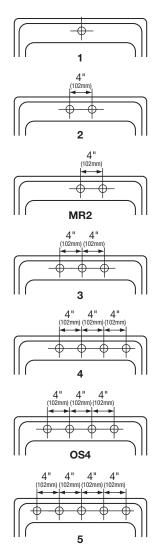

## DOUBLE BOWL HOLE DRILLING CONFIGURATIONS

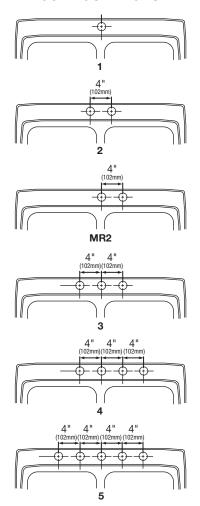

elkayusa.com