

### Teton 36" System

Comes with a patented clip system with real fire-brick interior

### Pioneer 36" System

Comes with textured brick refractory panels

### Wilderness 36" System

Outdoor stainless steel comes with a patented clip system with real firebrick interior




# IRONHAUS

## Handcrafted Fireplace Systems

UL 127 Certified | **36"** Woodburning Fireplace

- Full Masonry Design
- Textured /Colored Refractory or masonry firebrick liner
- Gas Log Ready Design (Refractory Only)
- Full Length Nailing Flanges

Vent Size	12"
Min. Pipe Clearance	2"
Min. System Height	16'
- w/ Single Offset	16'
- w/ Two Offsets	22' 0"
Max. Dist. Between Elbows	6' 0"
Max. System Height	50' 0"

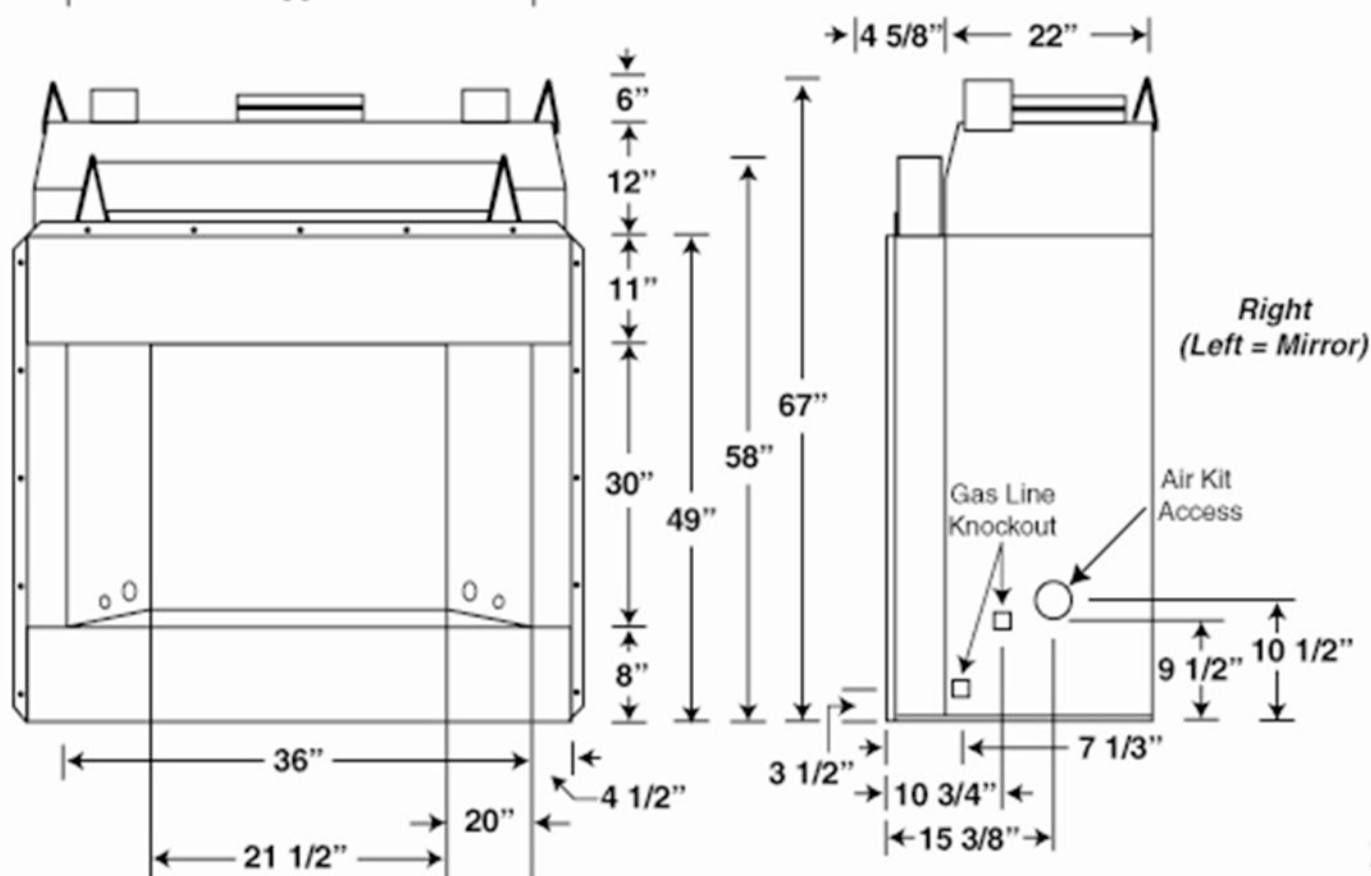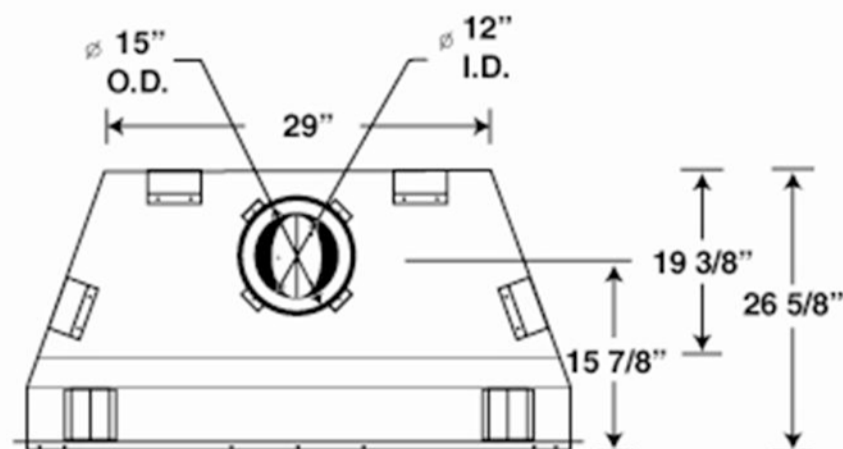

### Teton 36" System

Comes with a patented clip system with real firebrick interior

### Pioneer 36" System

Comes with textured brick refractory panels


### Wilderness 36" System

Outdoor stainless steel comes with a patented clip system with real firebrick interior



# IRONHAUS

Handcrafted Fireplace Systems

## 36" Standard Framing Dimensions

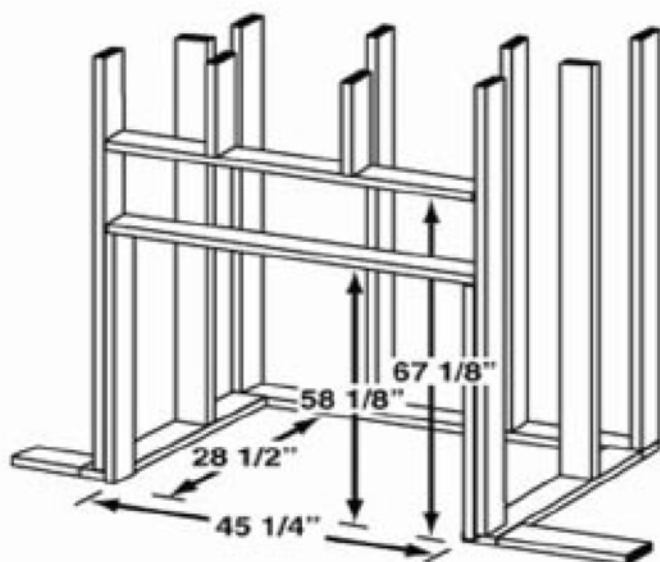

Ceiling / Roof Opening		w/ 30°
Pitch	Opening	Offset
Flat	19"	22"
0 - 6/12	22"	N/A
6/12 - 12/12	27"	N/A

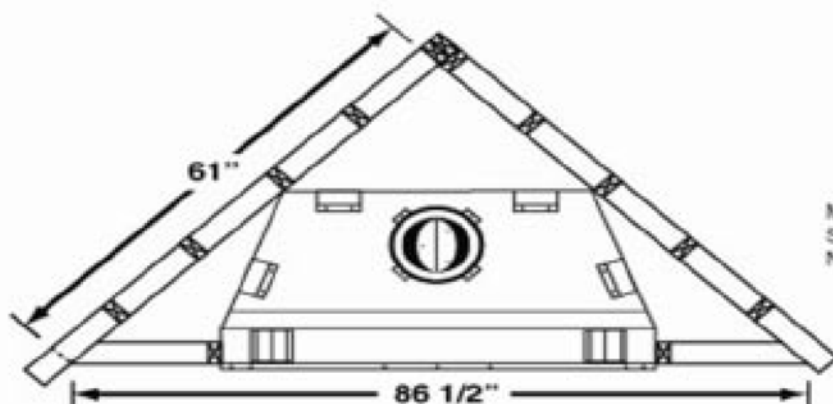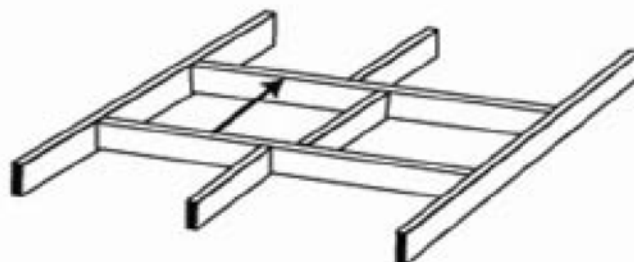

Maintain 1 1/2" Clearance at  
Sides and Back of Fireplace  
Not Required at Nailing Flange

#### NOTE:

A Hearth Extension Projecting a Minimum of 20" in Front of, and 12" Beyond Each Side of the Fireplace Opening is Required to Protect Combustible Floor Construction in Front Of the Fireplace. See Installation Instructions for Complete Information

#### NOTE:

Built-in Features Such as Mantels, Bookshelves, etc. Made of Combustible Materials Must Maintain Minimum Clearances from the Fireplace. See Installation Instructions for Complete Information

"Product design, features and specifications are subject to change at any time. Refer to current product instructions prior to installation."