


SF38SSET



°SF38SSET

SF38 incorporate the familiar bullet shaped body with a 3/8-16 male thread, permitting installations into concrete ceilings (using a 3/8-16 threaded nut, anchor or other feature). SF38S includes a Safety cap to prevent unintentional movement (SF38S).

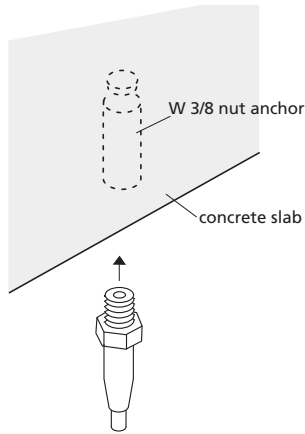

° Product Information

cable size

1/16" 1.5 mm

3/32" 2.5 mm

2-3

maximum weight

1/16": 65 lbs. 30 kg

3/32": 155 lbs. 70 kg

function

ceiling: 3/8-16 anchor

midway

installation instructions

Concrete: Drill hole for 3/8"-16 anchor, set firmly into concrete. Screw in SF38, unscrew safety cap almost completely, insert cable into tip of gripper, tighten safety cap.

Arakawa Hanging Systems

2505 SE 11th Avenue, Suite 122

Portland, Oregon 97202

phone: 503.236.0440

fax: 503.236.0427

toll free: 888.272.5292

www.arakawagrip.com

Copyright © 2008 Arakawa & Co., Ltd. All rights reserved. Arakawa products are covered by U.S. and foreign patents, issued and pending. Specification and price change privileges reserved.

