



SF34

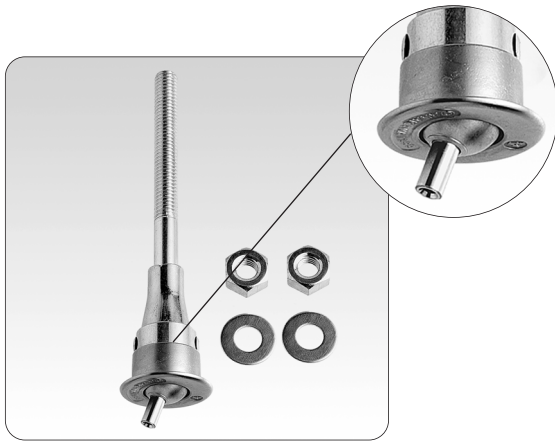

°SF34

The SF34 Gripper is intended as a ceiling fastener, for use in angled suspended ceilings, attached to Unistrut® (or similar). As such, it is similar to the SF27, but allows the cable to extend at a different angle (up to maximum 30°) than the SF27. Hollow structure allows excess cable to be inserted through part and into ceiling cavity (depending on structure).

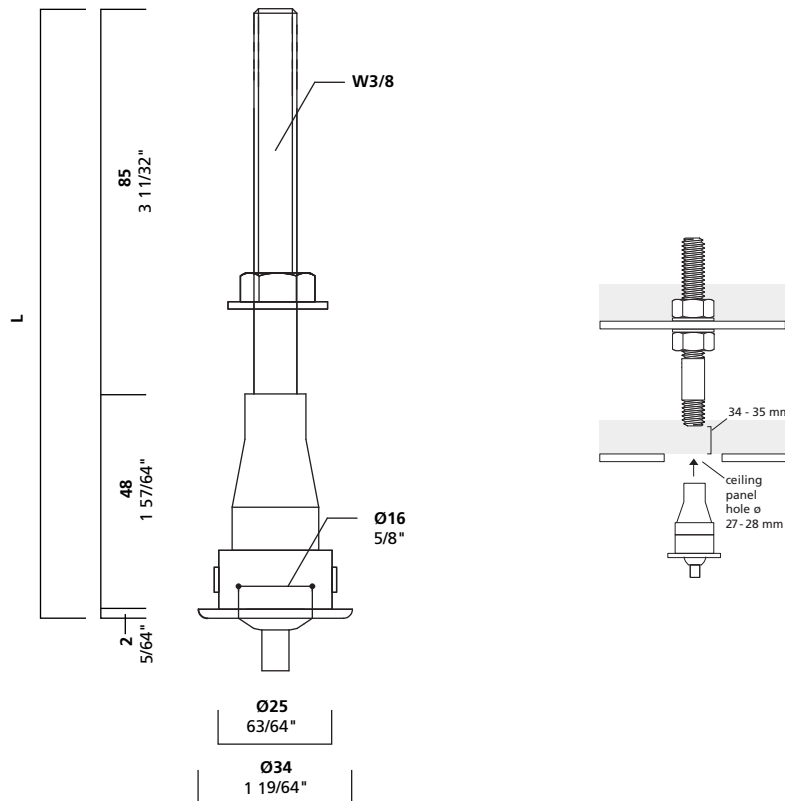

° Product Information

cable size

1/16" 1.5 mm

3/32" 2.5 mm

2-3

maximum weight

1/16": 65 lbs. 30 kg

3/32": 155 lbs. 70 kg

function

ceiling: sheetrock, acoustical tile, concrete, Unistrut, where movement is required, or sloped ceilings.

installation instructions

Separate SF34 into 3 parts: bolt, flange and gripper. Fix the bolt to reinforcement material, fasten the flange to the bolt, and then screw in the gripper. Distance from surface of ceiling panel to bolt is 34-35 mm. Hole opening is 27 -28 mm.

Arakawa Hanging Systems

2505 SE 11th Avenue, Suite 122

Portland, Oregon 97202

phone: 503.236.0440

fax: 503.236.0427

toll free: 888.272.5292

www.arakawagrip.com



Copyright © 2007 Arakawa & Co., Ltd. All rights reserved.
Arakawa products are covered by U.S. and foreign patents, issued and pending. Specification and price change privileges reserved.