


Scratch Repair Instructions

for Kwalu Casegoods, Table Tops and Wall Protection

Users should follow these instructions for all Kwalu Casegoods, Table Tops, and Wall Protection scratch removals:

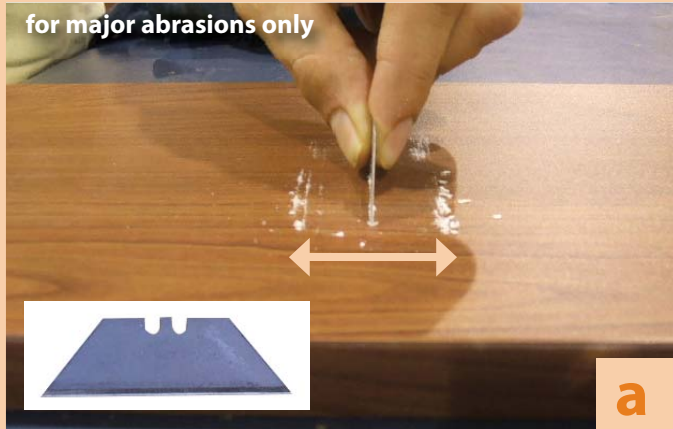

for major abrasions:

1. Holding a **blade** vertical to the surface, scrape in the direction of the grain until the surface imperfection is removed. (figure a)
2. Using a **Scotchbrite #7448 pad**, rub the surface of the sheet in the direction of the grain 2 or 3 times. Ensure that the repair is blended into the surrounding area. (figure b)
3. Buff the surface of the sheet back to semi-gloss with **0000 steel wool**. (figure c)

for minor abrasions:

1. Using a **Scotchbrite #7448 pad**, rub the surface of the sheet in the direction of the grain 2 or 3 times. Ensure that the repair is blended into the surrounding area. (figure b)
2. Buff the surface of the sheet back to semi-gloss with **0000 steel wool**. (figure c)

notes:

- Warranty may be voided if proper maintenance procedures are not followed.
- Cleaning agents that contain abrasives such as Ajax or Comet will scratch the finish and should not be used.
- Customers should not use aromatic or chlorinated hydrocarbons, ketones, or nitro compounds on the finish of the frames or panels. The list of chemicals and substances mentioned above is not meant to be exhaustive. Customers can contact the Sales Department team for a complete list of substances that should not be applied to the finish of the panels.

Kwalu[®]

Virtually Indestructible™

seating • tables • casegoods • wall protection

1-877-MY-KWALU (695-9258) kwalu.com