


5/16/05


Installation Accessories

Fab-Lok® Fasteners

Used with LIGHTGUARD®

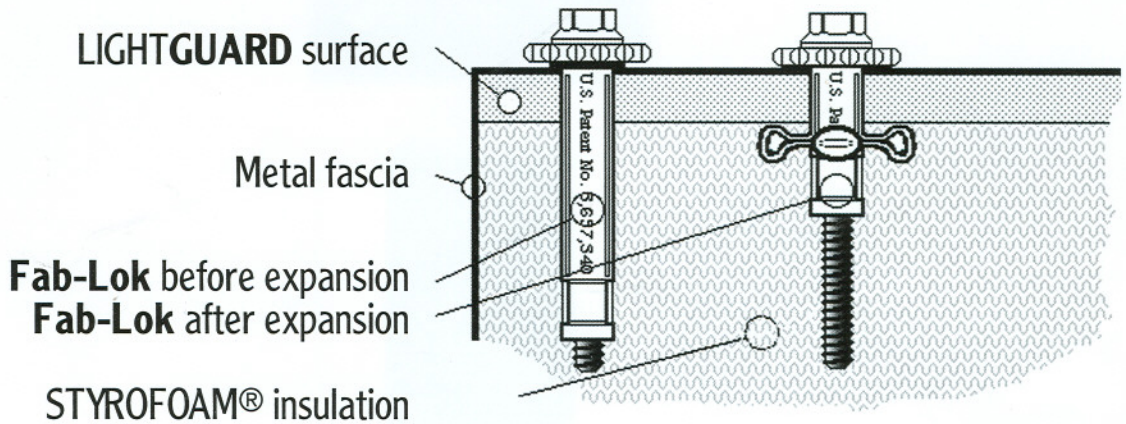

Screw Metal: 305 Stainless
Rivet/Sleeve Material: 5052-H32 Aluminum
Grip Range: 0.5" - 0.75"
Penetration Length: 1.807"

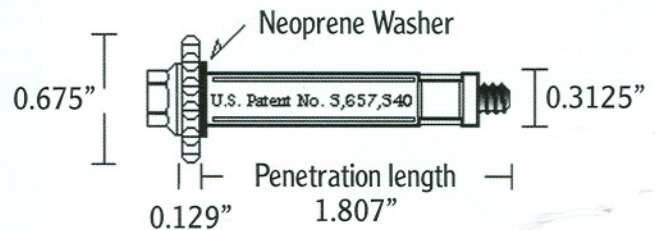

This fastener is a stainless steel threaded machine screw, mechanically joined to a slotted rivet sleeve. The sleeve is aluminum. A 0.5" O.D. neoprene composition washer provides a positive seal.

Order: For LIGHTGUARD, order EZJ250

Contact: Fabco Fastening Systems

For Distributor nearest you, call:
Elco Construction
800-435-7213, ext. 5430
www.fastenersforconstruction.com

®LIGHTGUARD is a registered trademark of T. Clear Corporation
®Styrofoam is a registered trademark of the Dow Chemical Company