


RD-100-CP

Tag: _____

Roof Drain with 12"x12" Promenade Top

SPECIFICATION: Watts Drainage RD-100-CP epoxy coated cast iron roof drain with flashing clamp with integral gravel stop, 12-3/4" (324x324) square epoxy coated ductile iron promenade top, and no hub (standard) outlet.

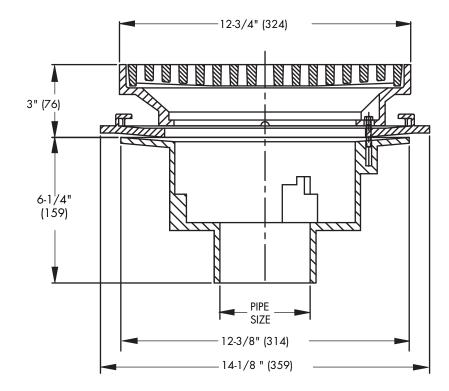

Components		
B2 FD-460-F FC-1		

Pipe Sizing (Select One)		
Suffix	Description	
2	2"(51) Pipe Size	
3	3"(76) Pipe Size	
4	4"(102) Pipe Size	
5	5"(127) Pipe Size	
6	6"(152) Pipe Size	

O	Outlet Type (Select One)		
Suffix	Description		
NH	No Hub (M)		
P	Push On		
T	Threaded Outlet		
Х	Inside Caulk		

Options (Select One or More)		
Suffix	Description	
-1	All Nickle Bronze Top	
-6	Vandal Proof Top	
-9	Hinged Grate	
-12	Galvanized Top	
-13	Galvanized Body & Flashing Clamp	
-B	Sump Receiver	
-D	Underdeck Clamp	
-F	Adjustable Extension Flange	
-SO	Side Outlet (2,3,4" Only)	

Optional Body Material		
Suffix	Description	
-60 -61	PVC Body w/Socket Outlet ABS Body w/Socket Outlet	

Deck opening 10" (254) with sump receiver 13-1/4" (337)

Load Rating & Free Area

Load	Free Area
Ratina	Sq. In.
*XHD	41

* The load classifications are in accordance with the American National Standards ASME A112.21.1M XHD - Safe Live Load 7500-10000 lbs.(3375-4500kg) The above categories are given as a guide only. Please consult factory.

Job Name	Contractor
Job Location	Contractor's P.O. No.
Engineer	Representative

WATTS Drainage reserves the right to modify or change product design or construction without prior notice and without incurring any obligation to make similar changes and modifications to products previously or subsequently sold. See your WATTS Drainage representative for any clarification. Dimensions are subject to manufacturing tolerances.



Specification Drainage Products

USA: 100 Watts Road, Spindale, NC, 28160-2298; TEL: 828-288-2179 TOLL-FREE: 1-800-338-2581 www.watts.com

ES-WD-RD-100-CP USA 0607 RD-100-CP