

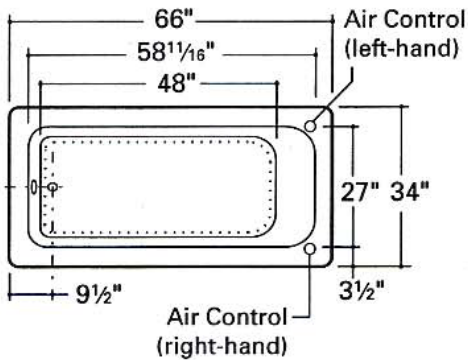


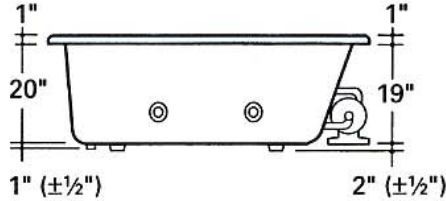


CLASSIC III

BATHTUB WITH AIR
CLAT 202 (left-hand)
CLAT 212 (right-hand)

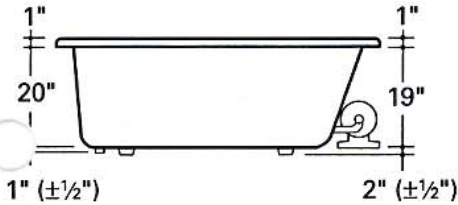

BATHTUB WITH AIR AND WHIRLPOOL
CLAW 202 (left-hand)
CLAW 212 (right-hand)

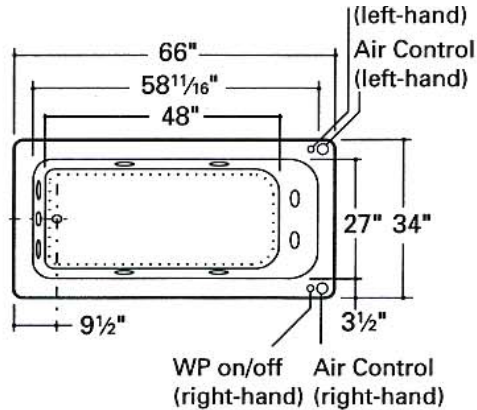

Notes:

- Whirlpool motor
 1 horsepower
 120 volt/20amp dedicated line
- Airtub blower
 120 volt/15amp dedicated line
- Blower/motor requires access panel
 with min. dimensions of 16"H x 30"W
- Air holes approximately every 2"
 around perimeter of bathing well.

- Sufficient air space is required for
 the blower to function properly.
 Do not seal the surrounding area.
- Air blown into the bathtub is heated
 to prevent cooling of the water.
 This will not in any way reheat or
 maintain the temperatur of the water.
- minimum/maximum capacity:
 57 / 70 gallons
- Whirlpool and airblower will auto-
 matically shut-off after 20 minutes
 of operation, however they can be
 immediately restarted.

All dimensions are based on original specifications and are subject to change and variation. Please consult your Design Associate for current specification.