

Max•Steel Latchsets

- Will fit 2⁷/₈" bore.
- For commercial and residential use.
- 2³/₈" and 2³/₄" backsets available.
- Supplied for 2³/₈" backset and 1¹/₈" door thickness unless otherwise specified.
- All lever latchsets are ADA approved.

Latch Features

- 28° retraction.
- 7 mm hub.
- Adjustable faceplate/armor plate for beveled doors.
- Built-in privacy feature with automatic release by inside lever or depression of latch nose.
- All dimensions are standard to fit existing bores for replacement installations.
- Faceplates and strikes are solid brass. No. 013 "T" strike supplied as a standard or No.014 "Full Lip" strike as an option at no extra charge. No. 019 4⁷/₈" ASA strike also available. Specify when ordering.
- Critical interior parts are made of solid brass.

Concealed Screw Roses:

Thru-bolted roses

Modern 2⁷/₁₆" dia. x 1/2" proj.

Traditional 2⁵/₈" dia. x 1/2" proj.

Functions

Passage: Latch operates by knob or lever from either side of door. Uses 7mm solid spindle.

Privacy: Latch operates by knob or lever from either side. Push button on interior engages privacy; emergency release hole is on exterior rose. Turning inside lever will release privacy and retract latchbolt. For bathroom or bedroom. Uses 7mm split spindle.

Pair Dummy: Trim on both sides of door.

Single Dummy: Trim on one side of door only.

Passage Latches (7mm Hub)

105KPA38 2³/₈" backset
Passage Knob Latch

105LPA38 2³/₈" backset
Passage Lever Latch

105KPA34 2³/₄" backset
Passage Knob Latch

105LPA34 2³/₄" backset
Passage Lever Latch

Privacy Latches (7mm Hub)

106KPR38 2³/₈" backset
Privacy Knob Latch

106LPR38 2³/₈" backset
Privacy Lever Latch


106KPR34 2³/₄" backset
Privacy Knob Latch

106LPR34 2³/₄" backset
Privacy Lever Latch




All Omnia lever latchsets meet ADA accessibility requirements.

DRAWINGS NOT TO SCALE




FACEPLATE

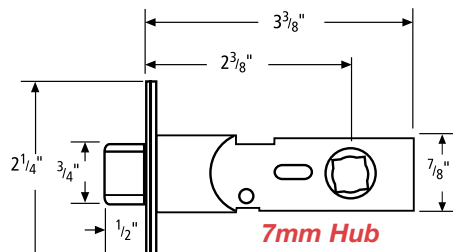


Privacy Latch Shown


■ SPECIFY 2³/₈" OR 2³/₄" BACKSET. ■

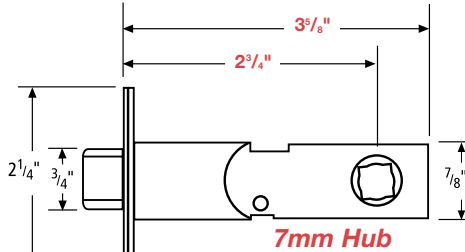


Passage Latch Shown



NO. 013
"T" STRIKE —
STANDARD



NO. 019
"ASA" STRIKE —
OPTIONAL



NO. 014
"FULL LIP" STRIKE —
OPTIONAL