




Panel Fabrics by

# Guilford of Maine

Grade 2

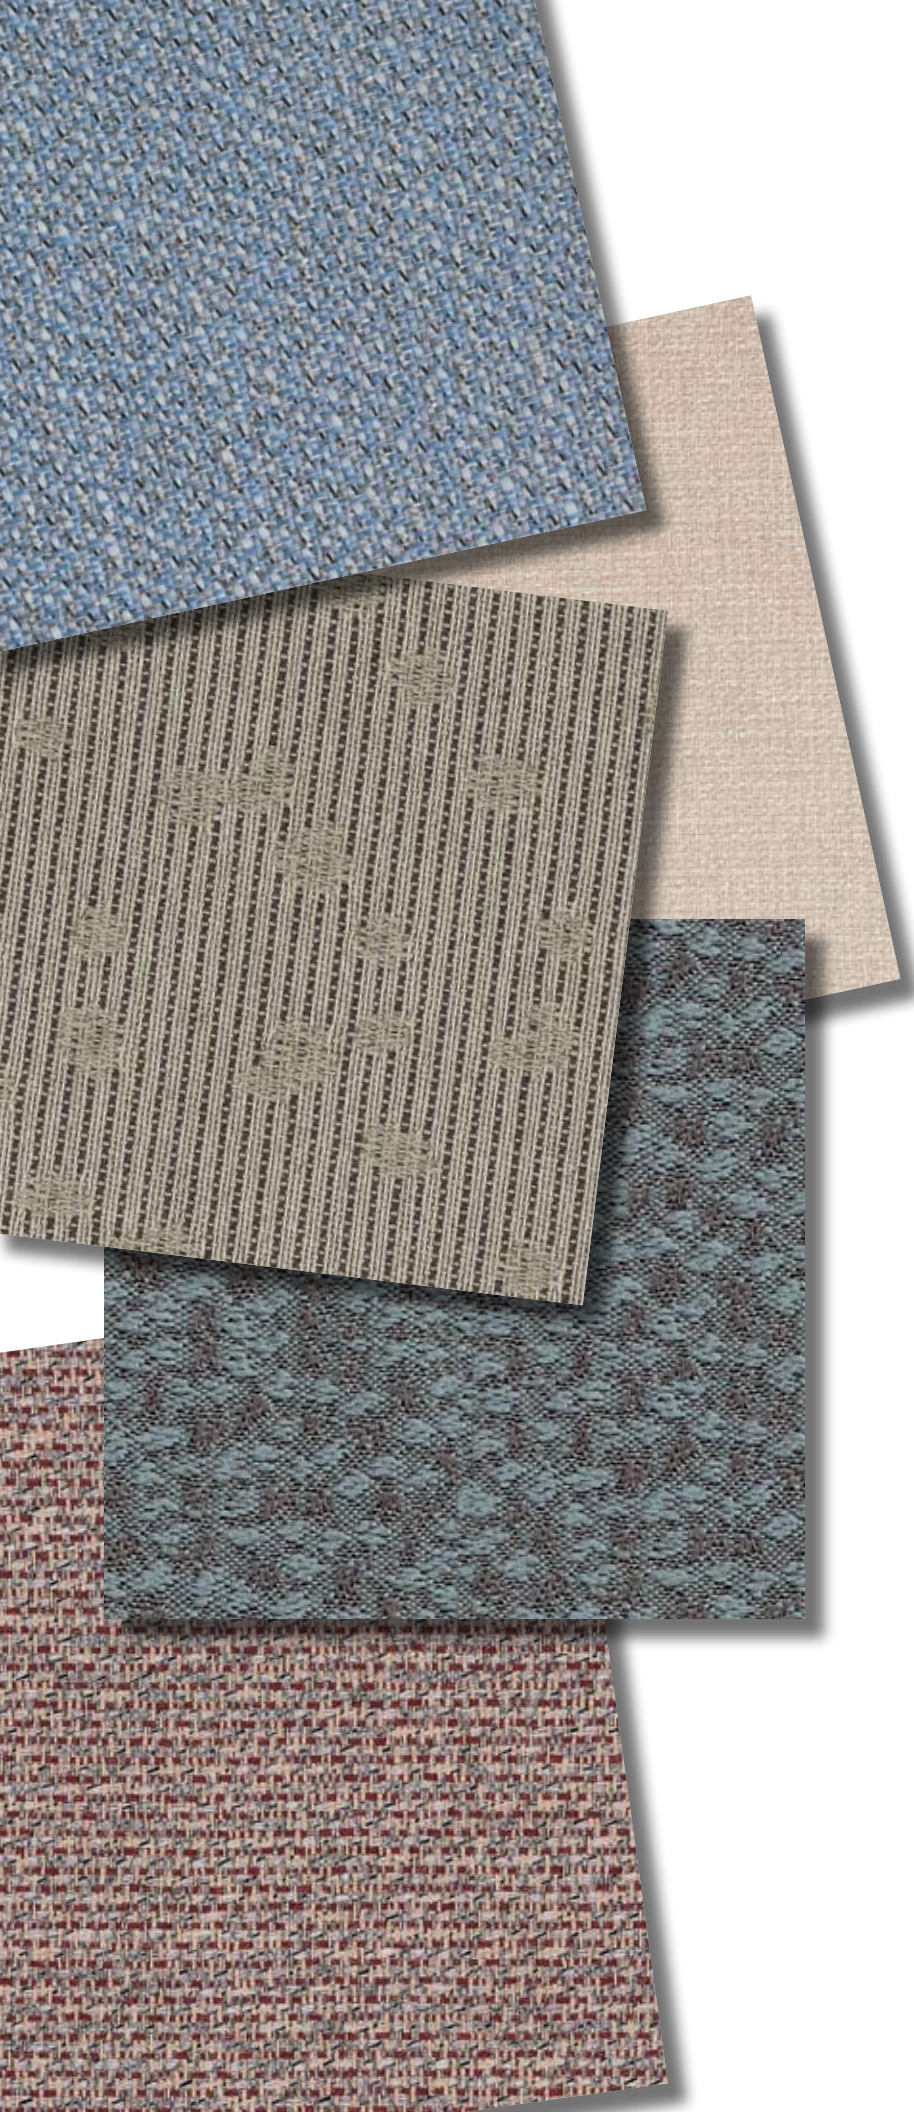



# Panel Fabrics

## GRADE 2



Hopscotch  
MBE Chess *E*



Lido  
JAA Newport *E*




Lido  
NBA Yellowstone *E*



Birdseye  
JAU Glide *E*



Birdseye  
JAT View *E*



Birdseye  
JAR Outlook *E*




Southside  
NCC Wheat *E*



Southside  
NCA Bisque *E*



Birdseye  
JAW Impression *E*



Lido  
JAE Bryce Canyon *E*



Lido  
NBB Napa Valley *E*



Hopscotch  
MBH Terra *E*



Lido  
NBD Pine Valley *E*



Lido  
JAF Padre *E*



Hopscotch  
MBG Leaf *E*



Southside  
NCE Walnut *E*



Southside  
NCB Shadow *E*



Hopscotch  
MBB Marbles *E*



Hopscotch  
MBD Jacks *E*




Lido  
NBC Huron *E*



Lido  
JAD Balboa *E*



Birdseye  
JAV Panorama *E*

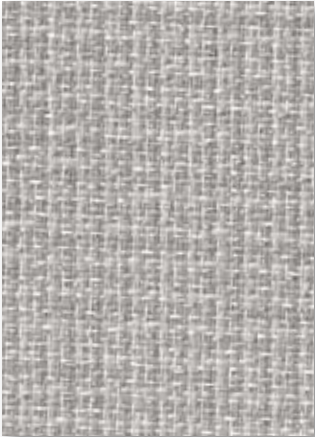

Hopscotch  
MBC Tic Tac Toe *E*



Hopscotch  
MBJ Granite *E*



Lido  
JAG Cape May *E*




Lido  
JAC Heartland *E*




Lido  
JAB Oak Bluffs *E*



Birdseye  
JAX Flight *E*



Birdseye  
JAY Altitude *E*



Southside  
NCD Stone *E*



Southside  
NCF Night *E*

## Grade 2

### Essentials® Program

All fabrics in this collection are available for **Essentials**, American Seating's quick-ship program, denoted with an E.

### Customer's Own Material (COM)

Customers may specify COM fabric for use on American Seating products. Samples of the COM line must be submitted to American Seating prior to order placement. Your American Seating sales representative or dealer can provide exact procedures for approval of a COM fabric.

### Dye Lot Variance

American Seating employs specific quality control procedures in the acceptance of all fabric lines. Industry-wide color tolerances allow for slight dye lot variations among fabric runs.

#### HOPSCOTCH

##### Grade Level 2

##### 100% Polyester

Type of Weave Crepe  
Weight 11.1 oz. per linear yard  
Width 66"  
Directional Yes  
Flammability ASTM E-84 Class 1/A  
California 117 Sec. E  
(CS-191-53)  
Light Fastness AATCC 16E; 40 hours  
Cleaning Code WS

W - Water-based cleaning agents or foam may be used.

WS - Clean with water based cleaning agent, foam or pure, water-free solvents. Vacuuming or light brushing is recommended to prevent dust and soil build-up.

The printed colors on these pages are representative of our fabric offering. Actual material samples should be requested for final fabric selection.

For samples call 1.800.544.0200.

#### LIDO

##### Grade Level 2

##### 100% Polyester

Type of Weave Dobby  
Weight 11.5 oz. per linear yard  
Width 66"  
Directional Yes  
Flammability ASTM E-84 Class 1/A  
California 117 Sec. E  
(CS-191-53)  
Light Fastness AATCC 16E; 40 hours  
Cleaning Code WS

#### BIRDSEYE

##### Grade Level 2

##### 100% Polyester

Type of Weave Jacquard  
Weight 12.5 oz. per linear yard  
Width 66"  
Directional Yes  
Flammability ASTM E-84 Class 1/A  
Light Fastness AATCC 16E; 40 hours  
Cleaning Code WS

#### SOUTHSIDE

##### Grade Level 2

##### 100% Polyester

Type of Weave Jacquard  
Weight 8.6 oz. per linear yard  
Width 66"  
Directional Yes  
Flammability ASTM E-84 Class 1/A  
Light Fastness AATCC 16E; 40 hours  
Cleaning Code WS



A History of Innovative > **SOLUTIONS**

401 American Seating Center  
Grand Rapids, MI 49504-4499  
Phone 616-732-6600 800-748-0268  
FAX 616-732-6401  
americanseating.com