

**AMERICAN SEATING

Upholstery Fabrics by Momentum
Grade 4


Upholstery Fabrics

Hue GGD Char *E*

Mime

FRA Pewter E

GRADE 4

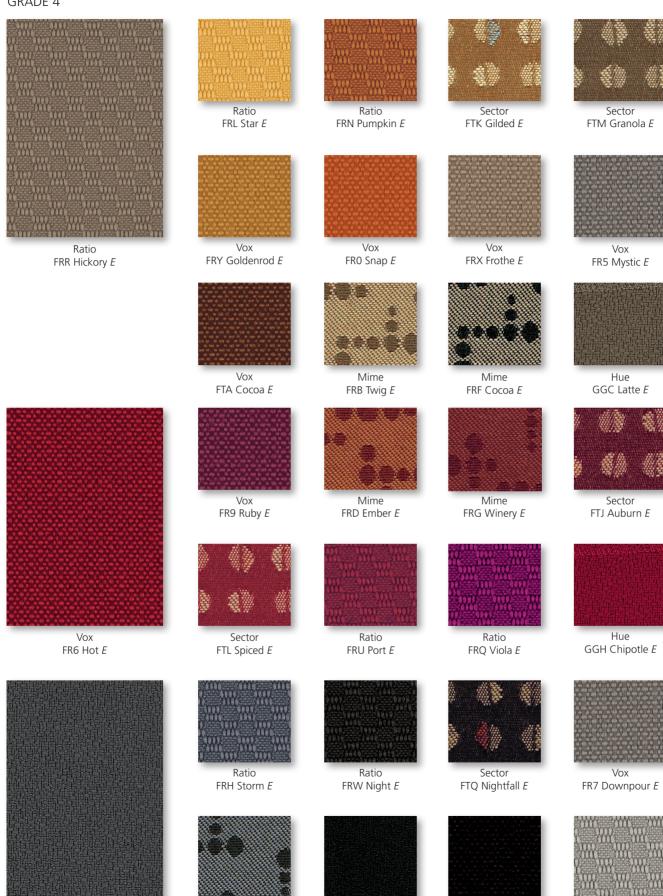

Vox

FR8 Black E

FRJ Nickel E

Hue

GGA Black E



Grade 4

Essentials® Program

All fabrics in this collection are available for **Essentials**, American Seating's quick-ship program, denoted with an E.

Customer's Own Material (COM)

Customers may specify COM fabric for use on American Seating products. Samples of the COM line must be submitted to American Seating prior to order placement. Your American Seating sales representative or dealer can provide exact procedures for approval of a COM fabric.

Dve Lot Variance

American Seating employs specific quality control procedures in the acceptance of all fabric lines. Industry-wide color tolerances allow for slight dye lot variations among fabric runs.

Grade Level 4 100% Polyester

Weight .79 lb per linear yd Width 56"

Width 56"
Directional Yes
Backing Yes - Latex

Abrasion

Resistance 100,000 double rubs Flammability CA Bulletin 117 Sec. E

UFAC Class 1

Light Fastness AATCC16A, Class 4;

40 hours

Surface Finish Teflon® Cleaning Code W

VOX

Grade Level 4 100% Polyester

Weight .77 lb per linear yd

Width 56"
Directional Yes
Backing Yes - Latex

Abrasion

Resistance 100,000 double rubs Flammability CA Bulletin 117 Sec. E

> UFAC CLASS 1 NFPA 260

Light Fastness AATCC16A, Class 4;

40 hours

Surface Finish Soil and stain resistant

Cleaning Code W

SECTOR Grade Level 4

38% Cotton, 62% Polyester Weight .70 lb per linear yd

Width 54"
Directional No
Backing Yes - Latex

Abrasion

Resistance 51,000 double rubs Flammability CA Bulletin 117 Sec. E

UFAC CLASS 1

Light Fastness AATCC16A, Class 4.5;

40 hours

Surface Finish Soil and stain resistant

Cleaning Code WS

MIME Grade Level 4 100% Polyester

Weight .68 lb per linear yd

Width 54" Directional Yes

Backing Yes - Acrylic

Abrasion

Resistance 51,000 double rubs Flammability CA Bulletin 117 Sec. E

> UFAC CLASS 1 ASTM E84-87 NFPA 260

Light Fastness AATCC16A, Class 4.5; 40 hours

Surface Finish Soil and stain resistant

Cleaning Code WS

HUE

Grade Level 4

100% Recycled Polyester

Weight .90 lb per linear yd

Width 54" Backing Yes - Latex

Abrasion

Resistance 1,000,000 double rubs Flammability CA Bulletin 117 Sec. E Light Fastness Class 4.5; 60 hours

Surface Finish Teflon® Cleaning Code SW

W - Water-based cleaning agents or foam may

be used.

WS - Clean with water-based cleaning agent, foam or pure, water-free solvents. Vacuuming or light brushing is recommended to prevent dust and soil build-up.

SW - Clean with water-based cleaning agents, foam or pure water-free solvents. Vacuuming or light brushing is recommended to prevent dust and soil build-up.

The printed colors on these pages are representative of our fabric offering. Actual material samples should be requested for final fabric selection.

Memo samples available online at memosamples.com or call 800.366.6839.



401 American Seating Center Grand Rapids, MI 49504-4499 Phone 616-732-6600 800-748-0268 FAX 616-732-6401 americanseating.com

