

FIAT[®]

CELESTE



MODEL MS-4836E CELESTE

This spacious shower enclosure has been designed for exceptional comfort and practicality. Featuring two integral seats (use one as extra shelf space) the Celeste is suitable for almost any situation.

Standard Features:

- e4836 Grohe shower system with:
 - hand shower with showerbar-mounted soap dish, adjustable holder, four spray settings (normal, jet, champagne, and pulsating)
 - ceiling shower head with 2 spray setting
 - three body massage heads
 - three diverter control valves
 - thermostatic valve
 - chrome or polished brass finish
- SD59C series aluminum door enclosure with clear glass, in chrome or gold finish
- Left or right location for mixing valve and hand-held shower (specify)

Options:

- Steam package (-S): with generator and steam head in chrome or gold finish
- Canopy light kit (for field installation)
- Canopy halogen mood lights with air button, and blue, red, purple, yellow, and amber interchangeable lenses (for field installation)
- Padded vinyl head rest (white only)




ENVIRO DATA

CELESTE
MS-4836E

Fiat acrylic Enviro Suites feature shower systems manufactured by Grohe. Each shower system is factory-plumbed, pressure and water tested and CSA approved. Diverter control valves are included with the systems which allow simultaneous or individual operation of shower heads and body massage combinations .

All of the shower heads on the Enviro Suites incorporate Grohe's advanced SpeedClean™ system, which eliminates the common problem of limescale build-up. A unique spray nozzle design made of specially formulated *silimer* allows any residue which may collect to be loosened with just a firm wipe of the hand and be washed away when the shower is turned on.

Also included as part of the system is a Grohmix thermostatic valve which automatically controls the flow of hot and cold water to accurately deliver the desired water temperature for the shower or bath as easily as you control the air temperature in your home. Water temperature fluctuations are completely eliminated, providing total protection from scalding or thermal shock.

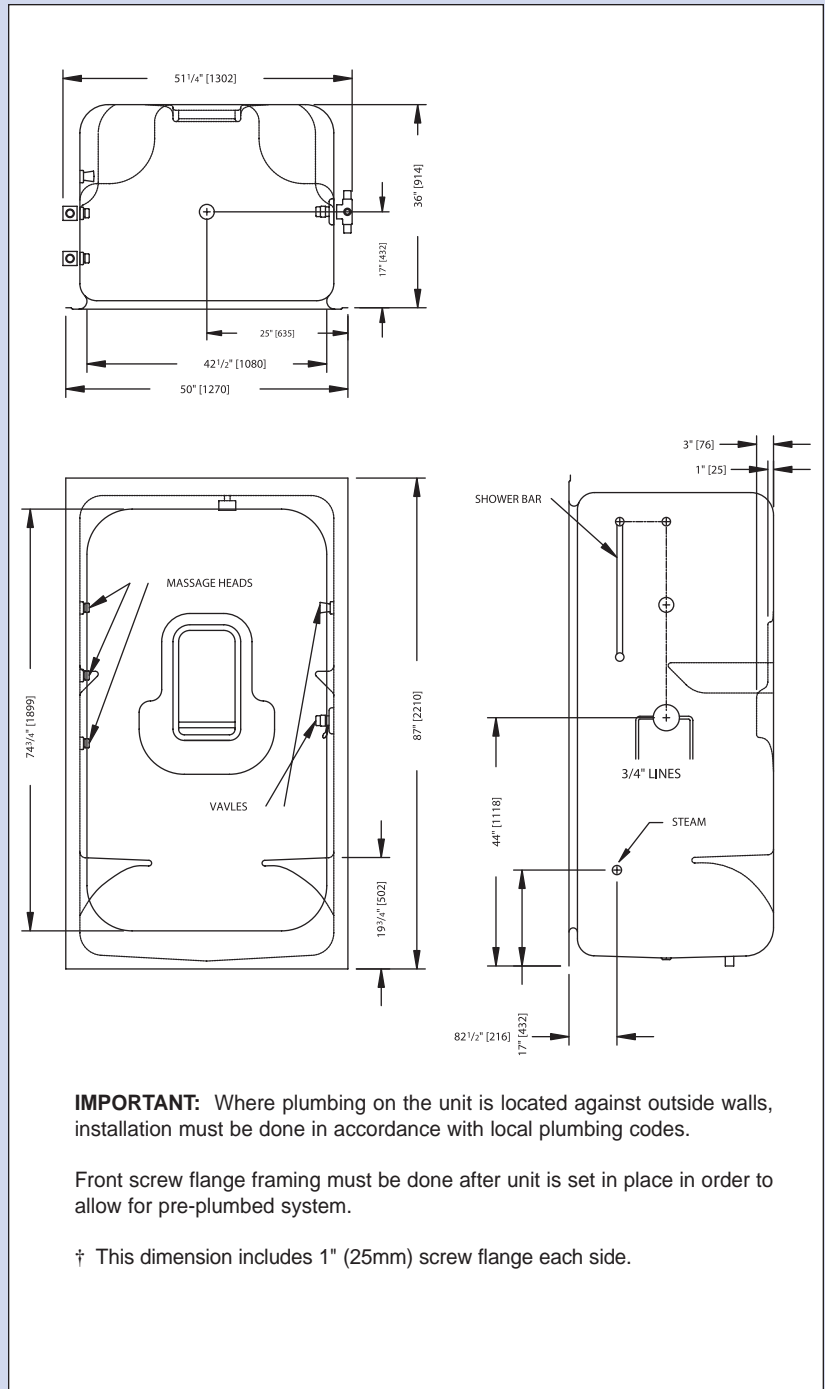

IMPORTANT:
Dimensions may vary plus or minus 1/4" (6 mm) and are subject to revision. Specifications are subject to change without notice. Unless otherwise specified, CSA approval has been obtained wherever required. **All products must be installed in accordance with installation instructions and local plumbing codes.** System performance will vary with local water pressure. Fully detailed warranty card and installation manual are supplied with each unit.

National Customer Assistance Group

255 Hutchings Street, Winnipeg, Manitoba R2X 2R4

Toll Free 1-800-665-7531 (204) 633-6122 Fax (204) 632-4854 Toll Free Fax 1-800-661-4854

e-mail: info@fiat.ca

website: www.fiat.ca