
NSTITUTIONAL SHOWER MODULE A 4242.02G

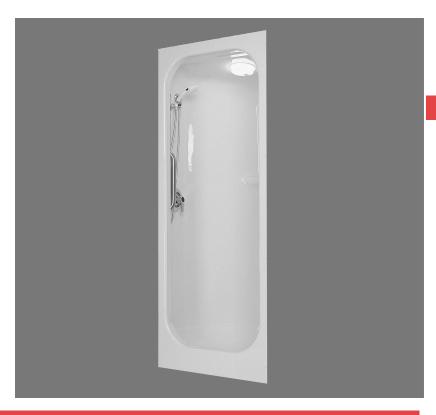

NOTES

- · Anti-skid floor treatment meets performance requirements of ASTM F-462-78.
- The basic shower conforms to ANSI Z124.2.

 Nominal Dimensions: Inside: 42" x 34"

> Outside: 43 1/2" x 35" Roughing-In: 44" x 35 1/2"

· Factory installed components are provided with additional back reinforcements to provide code complying structural integrity. In addition, these components are sealed from the backside.

OPTIONS

- Pressure balanced, single lever mixing valve with stops. (180AA)
- · Thermostatically controlled single lever mixing valve with stops. (T162AA)
- Hand-held shower with swivel fitting, 69" flexible stainless steel hose, and in-line vacuum breaker. (H11)
- 24" slide guide. (For hand-held shower attachment.) (H12)
- Dome light. (ATP1)
- Shower curtain. (C5)
- 2" plastic drain with chrome plated strainer. (PD2)
- 2" cast brass drain with chrome plated strainer. (H30)
- · Lucite® acrylic sheet containing Microban® antimicrobial product protection. Available in white and bone only. (MBP)

Lucite is a registered trademark of INEOS Acrylics, Inc. Microban is a registered trademark of Microban Products Company, Huntersville, NC.

One Piece Shower Module Neo-Corner Cast Acrylic

FEATURES

A 4242.02G

The unit is molded with a shampoo/soap shelf centered on the back wall. Shower modules shall be pre-drilled for a valve and a handheld shower head when factory supplies components. All units have an anti-skid floor treatment.

Unit must be set in a mortar base, leveled and any clearances between the opening and the unit be filled with mortar. Shimming is necessary. It is recommended that a floor drain at or near the entrance to the shower be included.

The factory supplied components are to include two stainless steel vertical grab bars, and a stainless steel curtain rod.

The unit is thermoformed from continuous cast acrylic sheet into a one piece seamless unit. The unit is reinforced with a composite matrix. The unit has a backside fire rating of "A" and a flame spread of 25.

A 4242.02F

Same as above with fold-up seat with white phenolic bench.



One Piece Cast Acrylic Neo-Corner Institutional Shower Module

