

9 INSTITUTIONAL TUB/SHOWER MODULE A 6032.21F



One Piece Tub/Shower Module Cast Acrylic

FEATURES

- **A 6032.21F R/L**

The unit is molded with a seat support ledge along the back wall for the fold down seat. The fold down seat offers some unique advantages. The security of a full depth bench seat and when folded up has a naughahyde cushion fastened to the underside for use as a headrest while the bather is seated inside the tub. The fold down seat is permanently attached and is easily accessible from within or outside the tub. The tub/shower module shall be pre-drilled for a valve and a hand-held shower head when factory supplies components.

The factory supplied components are to include one 39" stainless steel horizontal grab bar, one 20" stainless steel horizontal grab bar, two 16" stainless steel vertical grab bar, a fold-up wheelchair transfer seat with white phenolic bench, and a stainless steel curtain rod.

The unit is thermoformed from a solid color Lucite XL® high gloss acrylic sheet into a one piece, totally seamless unit. This unit is reinforced on the back with a composite matrix which has a backside fire rating of "A" and a flame spread of 25.

- **A 6032.21G R/L**

Same as above without fold-up seat.

NOTES

- Anti-skid floor treatment meets performance requirements of ASTM F-462-78.
- The basic tub/shower conforms to ANSI Z124.1.
- Nominal Dimensions: Inside: 54" x 31"
Outside: 60 3/4" x 33 1/4"
Roughing-In: 61 3/4" x 33 3/4"
- Factory installed components are provided with additional back reinforcements to provide code complying structural integrity. In addition, these components are sealed from the backside.

OPTIONS

- Pressure balanced, single lever mixing valve with stops. (185AA)
- Thermostatically controlled single lever mixing valve with stops. (T167AA)
- Hand-held shower with swivel fitting, 69" flexible stainless steel hose, and in-line vacuum breaker. (H11)
- 24" slide guide. (For hand-held shower attachment.) (H12)
- Dome light. (ATP1)
- Hydrotherapy whirlpool six jet system features a high performance 1 HP motor with an on/off air switch button and self draining pump. (A 6032.21W R/L)
- Shower curtain. (C6)
- Lucite® acrylic sheet containing Microban® antimicrobial product protection. Available in white and bone only. (MBP)


Lucite is a registered trademark of INEOS Acrylics, Inc. Microban is a registered trademark of Microban Products Company, Huntersville, NC.



9 INSTITUTIONAL TUB/SHOWER MODULE **A 6032.21F**

One Piece Cast Acrylic Institutional Tub/Shower Module

A 6032.21FR - Right Hand Drain
A 6032.21FL - Left Hand Drain

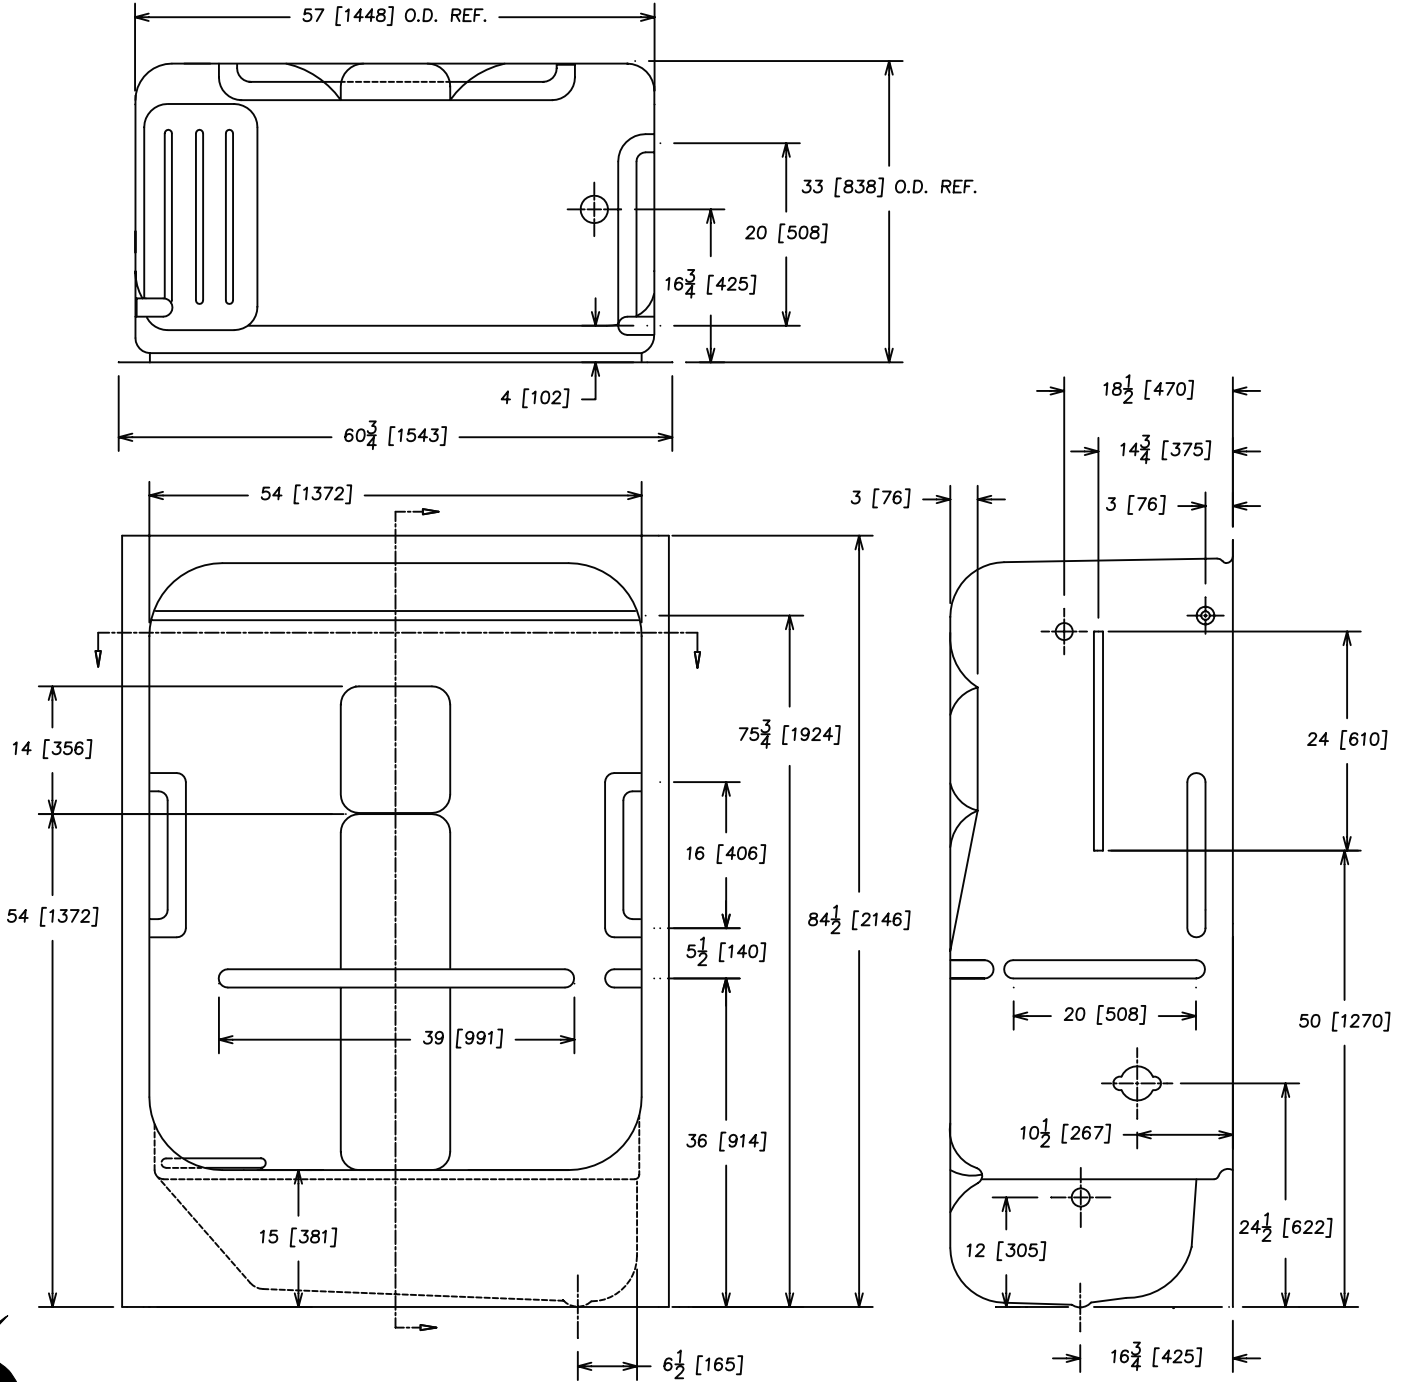

IMPORTANT: Roughing-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice.
 No responsibility is assumed for use of superseded or voided leaflets.