



**Concealed Arm Carrier
Wall Mounted Lavatory**
Vitreous China

FEATURES

• **1165V Norwich™**

1165V Norwich™ (4" centerset) 20" x 18" vitreous china lavatory with rectangular basin, splash lip, front overflow, and two soap depressions. Drilled for carrier with concealed arms.

• **1165S Norwich™**

1165S Norwich™ (8" centerset) 20" x 18" vitreous china lavatory with rectangular basin, splash lip, front overflow, and two soap depressions. Drilled for carrier with concealed arms.

• **1165H Norwich™**

1165H Norwich™ (one hole centerset) 20" x 18" vitreous china lavatory with rectangular basin, splash lip, front overflow, and two soap depressions. Drilled for carrier with concealed arms.

Supports: *Built-in wall or chair carrier with concealed arms.

Trim:

Waste:


Supplies:

Trap:

NOTES

- Fixture conforms to ANSI/ASME A112.19.2M standard.
- Size: Lavatory 20" x 18", Basin 14 3/4" x 10 1/4"
- Meets ADA requirements when top of lavatory rim is mounted at 34" maximum height.



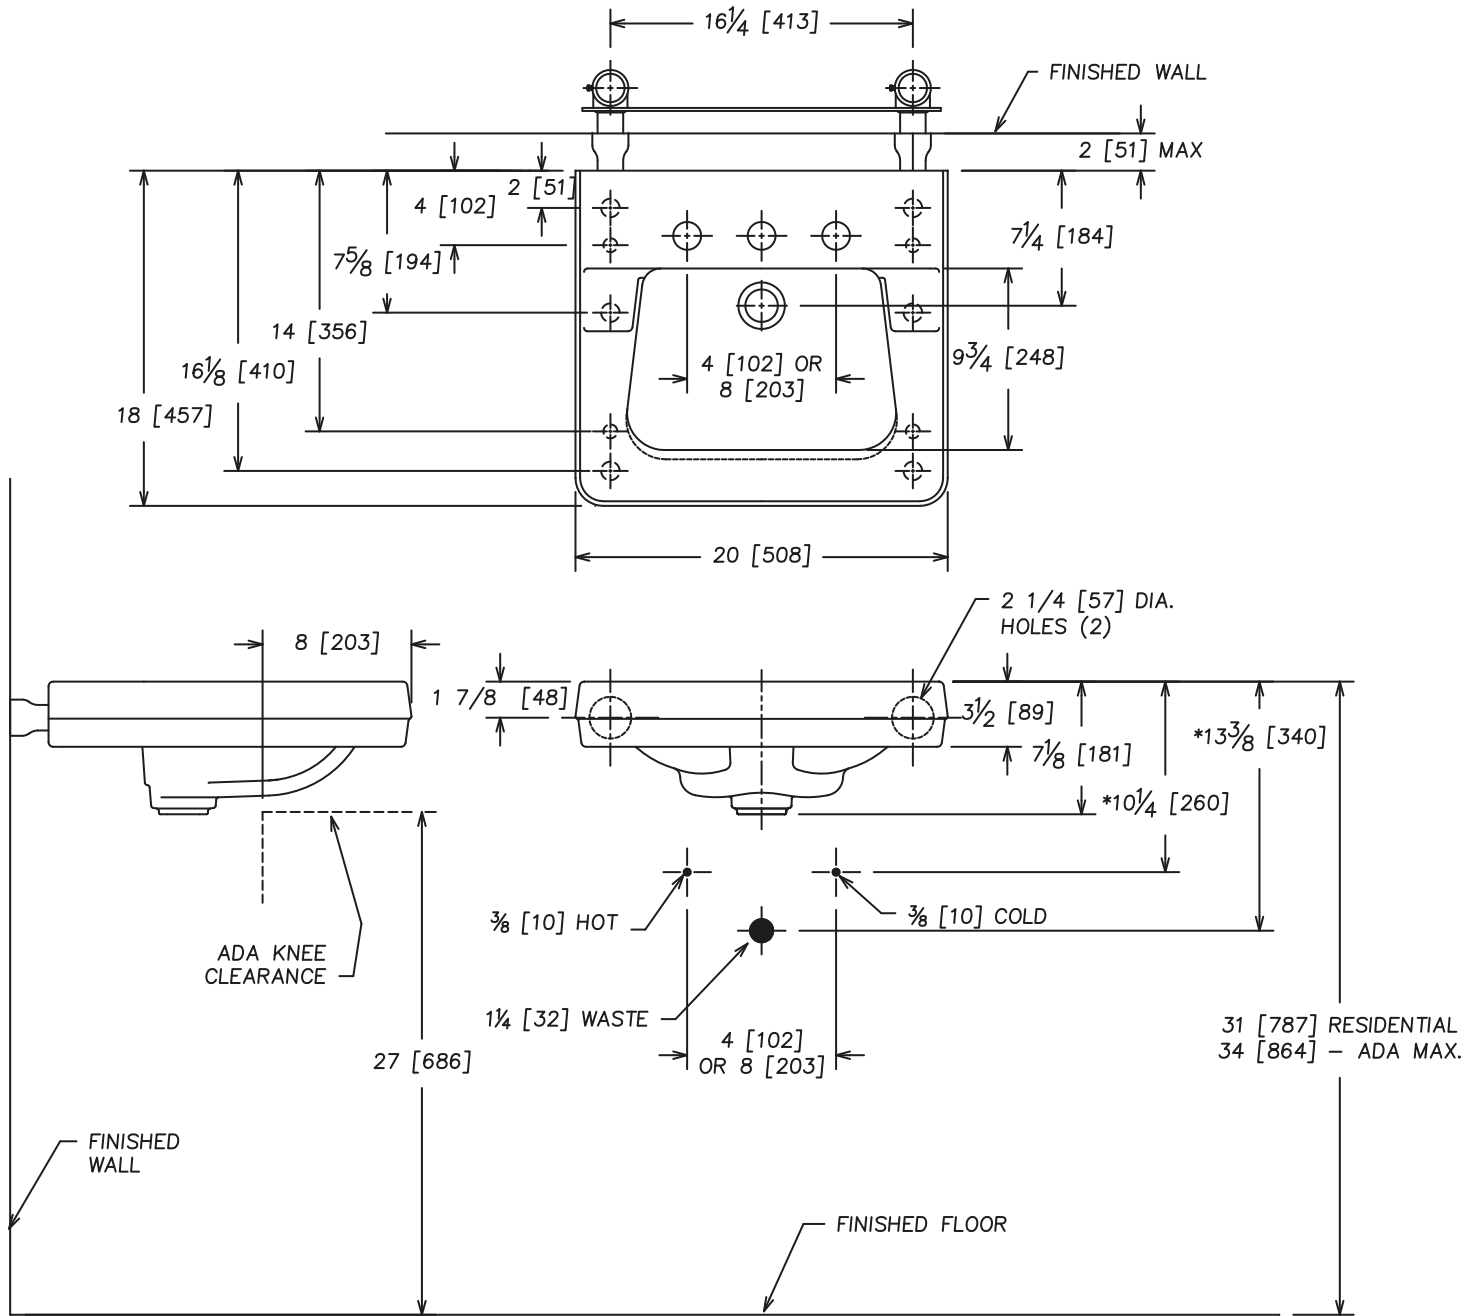

NOTE: ROUGHING-IN ON CHAIR CARRIER TO BE OBTAINED DIRECT FROM THE MANUFACTURER
 * SUGGESTED DIMENSION-VARIABLE DEPENDING UPON TYPE OF SUPPLY AND WASTE.
 ** FIXTURE COMPLIES WITH AMERICANS WITH DISABILITIES ACT WHEN THE LAVATORY IS MOUNTED AT RIM HEIGHT OF 34" MAXIMUM.

IMPORTANT: Roughing-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice.
 No responsibility is assumed for use of superseded or voided leaflets.