

Eco Richland[™]

7120Top Spud, Washout,
Wall Hung Urinal



Features

- Environmentally Friendly
- Low Water Consumption .5 gpf / 1.9 lpf 1.0 gpf / 3.8 lpf
- Qualifies for Two [2] LEED Points
- Designed with Exposed Trap and Strainer
- Wall Mounted Design Complete with Concealed Hangers
- Vitreous China Construction
- Available in White
- Limited Lifetime Warranty



Model #	Description
7120	Washout wall hung urinal with 3/4" [19 mm] top spud with exposed trap and strainer, and concealed hangers. Less flush valve







Eco Richland™ 7120

Specifications

Water Pressure Range: 25 to 80 P.S.I.

Flush System: Washout

Water Usage: .5 gpf / 1.9 lpf - 1 gpf / 3.8 lpf


Top Spud: 3/4" [19 mm]

Bottom Spud: 1-1/2" [38 mm] **Shipping Cubes:** 1.8 cf. [.05 m³] Shipping Weight: 29 lbs. [13.2 kg]

Warranty:

Vitreous China - Limited Lifetime

Parts - One Year Limited

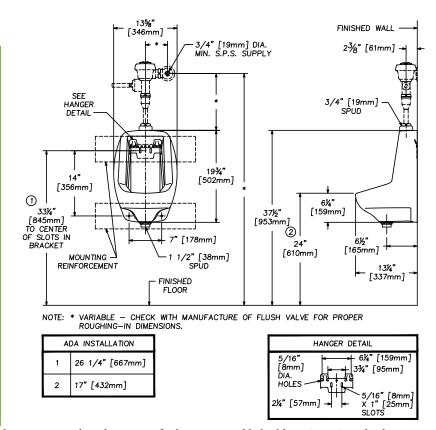

IMPORTANT: These dimensions are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2

Customer Service United States 41 Cairns Road Mansfield, OH 44903 Email: customerservice@craneplumbing.com

Customer Service Canada 15 Crane Ave. Stratford, ON N5A 6T3 Email: sales@craneplumbing.ca

www.craneplumbing.ca

