



**17 1/4" High, Low Consumption,
Wall Outlet Water Closet Bowl
Vitreous China**

FEATURES

• **31080 Sanwalton™**

Bowl: 31080 Sanwalton™ (1.6 gpf / 6.0 lpf) vitreous china, elongated rim, angle flange, 1 1/2" top spud wall outlet 17 1/4" bowl.

Valve:* Flushvalve with vacuum breaker, 1" screwdriver angle stop and flush connection. Suggested (1.6 gpf / 6.0 lpf) flushvalves are:

- Sloan "Royal" #111
- Delany "Flushboy" #F402-1.6
- Zurn "Aquaflush" #Z-6000-WS-1

Supply:

Seat:

Color:

• **31081 Sanwalton™**

Bowl: 31081 Sanwalton™ (1.6 gpf / 6.0 lpf) vitreous china, elongated rim, angle flange, 1 1/2" top spud wall outlet 17 1/4" bowl with bedpan lug.

Valve:* Flushvalve with vacuum breaker, 1" screwdriver angle stop and flush connection. Suggested (1.6 gpf / 6.0 lpf) flushvalves are:

- Sloan "Royal" #111
- Delany "Flushboy" #F402-1.6
- Zurn "Aquaflush" #Z-6000-WS-1

Supply:

Seat:

Color:


NOTES

- Fixture conforms to ANSI/ASME A112.19.2M standard.
- **For efficient operation of the bowl, a minimum flowing water pressure of 25 P. S. I. is required at the valve.
- Fully glazed trapway.

WATER ECONOMY FACTS

Average Gallons Per Flush	**25 PSI	50 PSI	80 PSI
3480 Elongated Rim	1.54	1.56	1.55
3480 Elongated Rim	1.54	1.56	1.55
TRAPWAY.....	2"		
WATER SURFACE.....	12" x 10"		
WATER SEAL.....	2 1/4"		



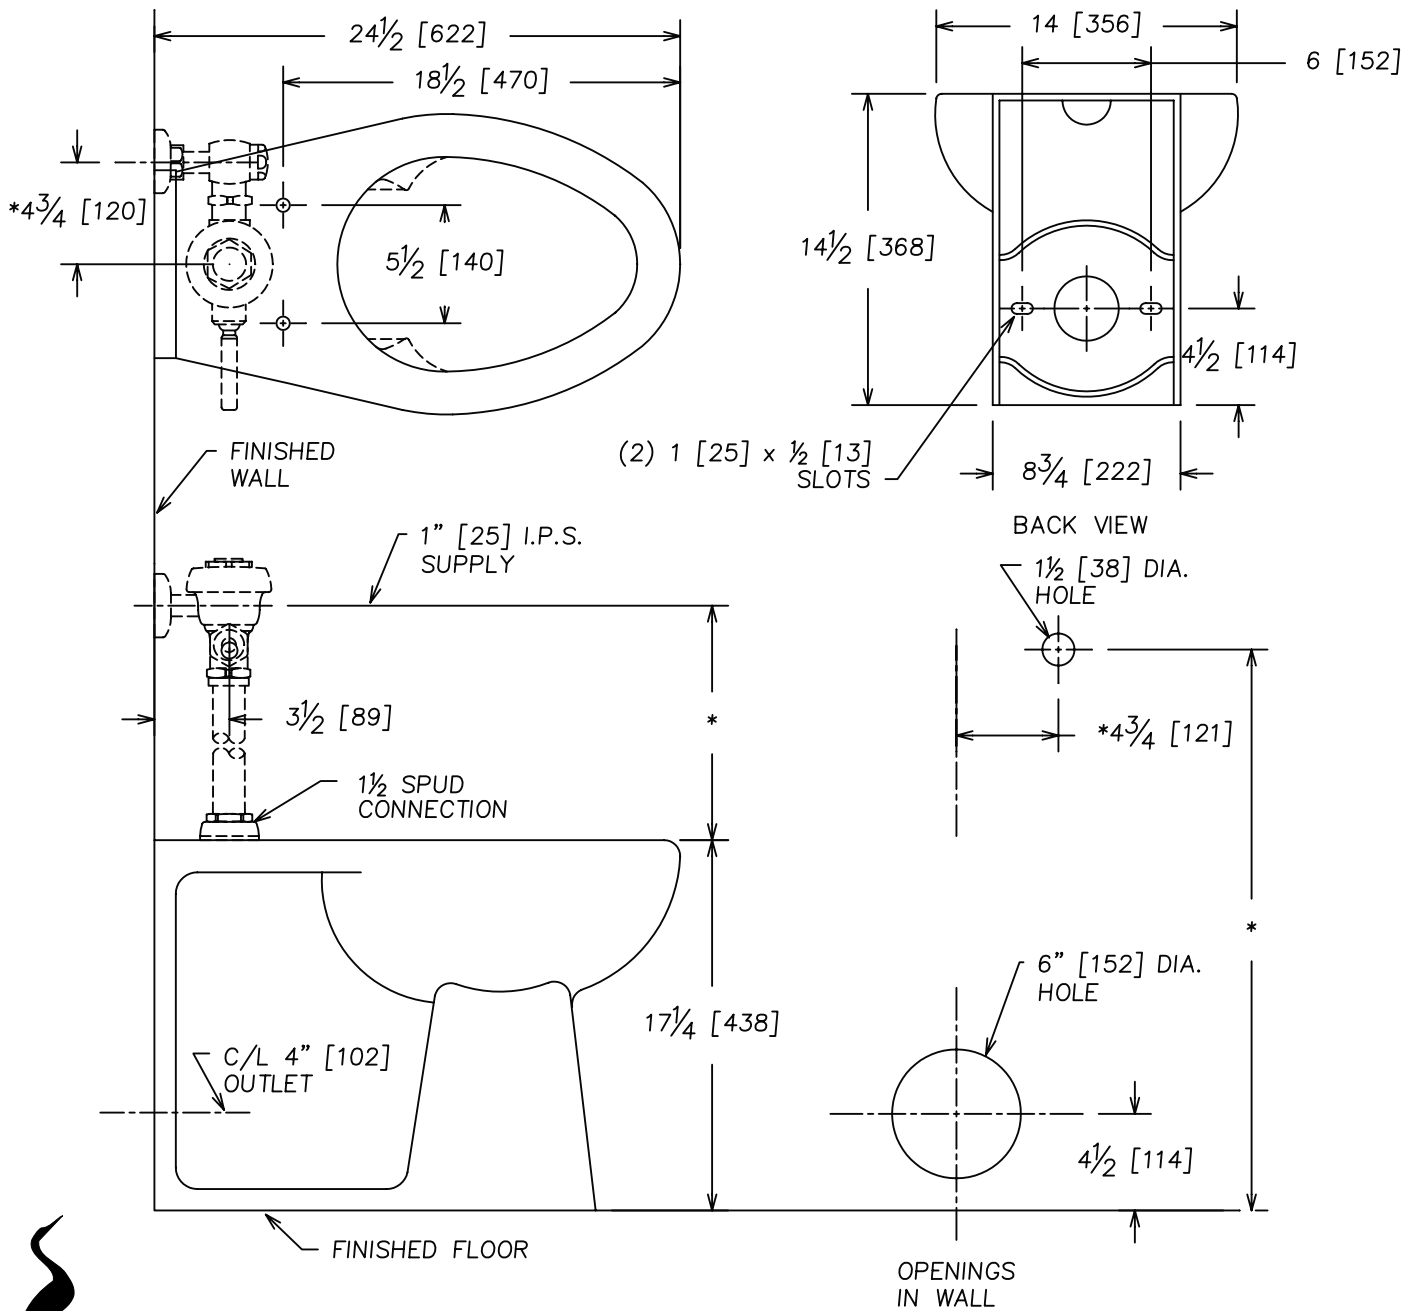

NOTE: * VARIABLE-CHECK WITH MANUFACTURER OF FLUSHVALVE FOR PROPER ROUGHING-IN DIMENSION.

IMPORTANT: Roughing-in dimensions may vary 1/2" and are subject to change or cancellation without prior notice. No responsibility is assumed for use of superseded or voided leaflets.