



17 1/4" High Low Consumption, Wall Outlet Water Closet Bowl Vitreous China

FEATURES

• 31082 Sanwalton™

Bowl: 31082 Sanwalton™ (1.6 gpf) siphon jet, elongated rim, angle flange, 1 1/2" back spud wall, outlet 17 1/4" bowl with integral seat.

Valve:* Flushvalve with vacuum breaker, 1" screwdriver angle stop and flush connection. Suggested (1.6 gpf) flushvalves are:

Sloan "Royal"	#1431.5
Delany "Flushboy"	#F534-1.6
Zurn "Aquaflush"	#Z-6143WS-1

• 31083 Sanwalton™

Bowl: 31083 Sanwalton™ (1.6 gpf) siphon jet, elongated rim, angle flange, 1 1/2" back spud wall, outlet 17 1/4" bowl punched with seat post holes.

Valve:* Flushvalve with vacuum breaker, 1" screwdriver angle stop and flush connection. Suggested (1.6 gpf) flushvalves are:

Sloan "Royal"	#143-1.5
Delany "Flushboy"	#F534-1.6
Zurn "Aquaflush"	#Z-6143-WS-1

Supply:

Seat:

Color:

NOTES

- Fixture conforms to ANSI/ASME A112.19.2M standard.
- ** For efficient operation of the bowl, a minimum flowing water pressure of 25 P.S.I. is required at the valve.
- Fully glazed trapway.

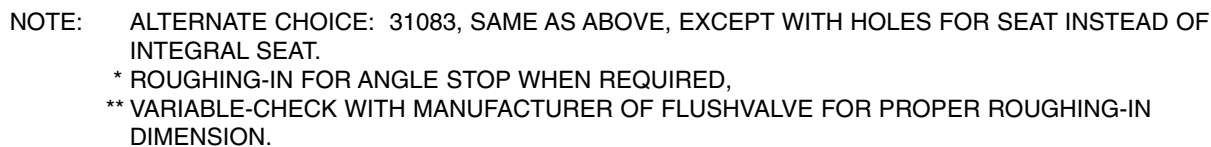
WATER ECONOMY FACTS

Average Gallons Per Flush	**25 PSI	50 PSI	80 PSI
31082 Elongated Rim (gpf)	1.54	1.56	1.55
31083 Elongated Rim (gpf)	1.54	1.56	1.55
TRAPWAY.....	2"		
WATER SURFACE.....	12" x 9 1/4"		
WATER SEAL.....	2 1/4"		





31083

**Universal-Rundle**

IMPORTANT: Roughing-in dimensions may vary ½" and are subject to change or cancellation without prior notice.
No responsibility is assumed for use of superseded or voided leaflets. CR/PL© 04/03 Pri

CR/PL© 04/03 Printed in U.S.A.