

Eco Whirlton™

3325

Elongated Front, 10" [254 mm] -
12" [305 mm] Flush Valve Bowl



Features

- Environmentally Friendly
- This model meets ANSI requirements using:
 - 1.28 gpf / 4.8 lpf Single Function Flush Valve
 - 1.6 gpf / 6.0 lpf Single Function Flush Valve
 - 1.1 gpf / 4.0 lpf to 1.6 gpf / 6.0 lpf Dual Function Flush Valve
- Qualifies for One [1] LEED Points when Using a 1.28 gpf / 4.5 lpf Single Function Flush Valve or a 1.1 gpf / 4.0 lpf to 1.6 gpf / 6.0 lpf Dual Function Flush Valve
- Large Water Surface Area
- 10" [254 mm] to 12" [305 mm] Rough-in
- 2" [51 mm] Fully Glazed Trapway
- Available in White, Bone and Biscuit
- Limited Lifetime Warranty




Model # Description

Model #	Description
3325	Elongated front, flush valve toilet. 10" [254 mm] or 12" [305 mm] rough-in. 1-1/2" [38 mm] top spud. Less toilet seat and flushometer.

EcoSolutions®
The Green Choice

High Efficiency Toilet
HET



The Green Building / LEED programs was created to provide contractors, building engineers, developers and architects with incentives or rewards for utilizing energy saving and water conservation products in the construction or renovation of their buildings. The LEED program provides points or credits that can be used to offset elements of the construction that would be debits against the property. Using a 1.6 gpf / 6.0 lpf toilets as the baseline, a HET toilet or HEU urinal that has a minimum average water savings of 20% can earn one [1] LEED point, or a minimum water savings of 32% can earn two [2] LEED points.

This fixture qualifies according to ASME test procedures as a high efficiency toilet (HET) with an average consumption of 1.28 gpf/ 4.8 lpf or less with a minimum water savings of 20%.

Specifications

Water Pressure Range: 35 to 80 P.S.I.

Flush System: Environmentally Friendly
Flushing Technology

Water Usage: 1.28 gpf / 4.8 lpf Single Function
1.6 gpf / 6.0 lpf Single Function
1.1 gpf / 4.0 lpf to 1.6 gpf / 6.0 lpf
Dual Function

Water Surface Area: 12" x 10"
[305 mm x 254 mm]


Trap Diameter: 2" [51 mm]

Water Seal: 3" [76 mm]

Shipping Cubes: 4.0 ft³ [.11 m³]

Shipping Weight: 44 lbs [20 kg]

Warranty: Limited Lifetime

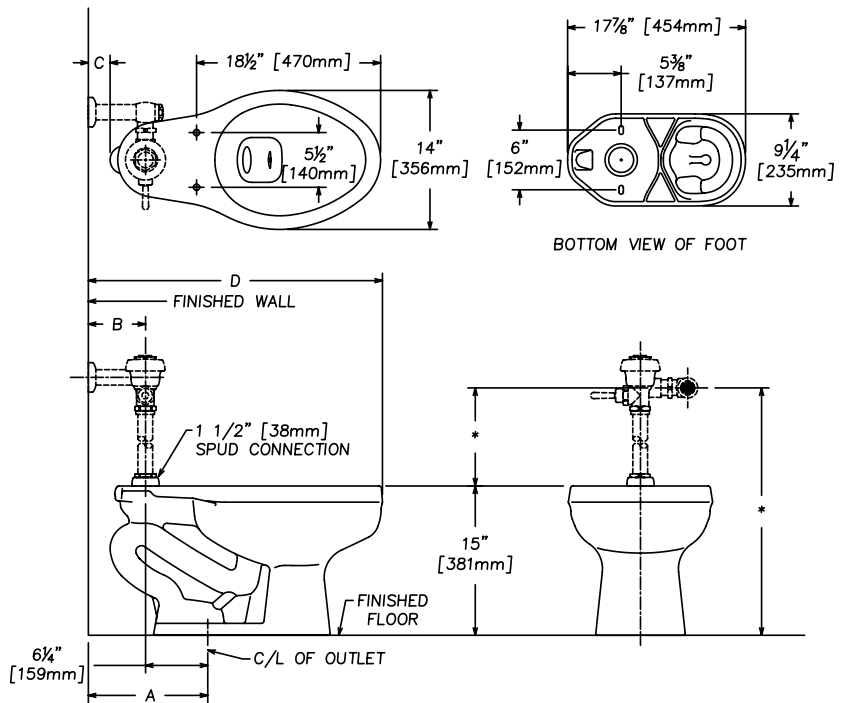

NOTE: * VARIABLE — CHECK WITH MANUFACTURER OF FLUSH VALVE FOR PROPER ROUGHING-IN DIMENSIONS.

DIM.	10" [254mm] R.I.	12" [305mm] R.I.
A	10" [254mm] MIN.	12" [305mm]
B	3 3/4" [95mm]	5 3/4" [146mm]
C	3/16" [5mm]	2 3/16" [56mm]
D	27 5/8" [702mm]	29 5/8" [752mm]

IMPORTANT: These dimensions are nominal and may vary within the range of tolerances established by ASME Standard A 112.19.2.

Customer Service United States
41 Cairns Road
Mansfield, OH 44903
Email: customerservice@craneplumbing.com

Customer Service Canada
15 Crane Ave.
Stratford, ON N5A 6T3
Email: sales@craneplumbing.ca

www.cranepumbing.com

www.cranepumbing.ca