

**General:**



Precast terrazzo one piece products are made of black and white marble chips cast in white portland cement to produce a compressive strength of not less than 3000 P.S.I., seven days after casting. The terrazzo surface is ground and polished with all air holes and/or pits grouted and the excess removed. Wheelchair receptors are available in custom sizes.

Receptor to have integral stainless steel entry cap. For wheelchair accessibility, receptor threshold entry height shall be 1/2" (13) complying with the barrier free requirements of ANSI Standard A-117.1—1980. Tiling flange cast integral shall be galvanized-bonderized steel and shall extend not less than 1" (25) above shoulder. Shoulder shall not be less than 4" (102) high inside, 6" (152) high outside and not less than 3" (76) wide.

Drain body shall be stainless steel cast integral, and shall provide for a caulked lead connection not less than 1" (25) deep to a 2" (51) pipe, or a quick drain connection using a QDC-4 connector and shall include a removable stainless steel or brass strainer plate. It is recommended that a floor drain at or near the entrance to the shower also be included.

**Installation:**

Establish 1/4" (6) clearance between shower floor and building wall. It is required that the entire area between the receptor and the building floor has a 1/2" (13) layer of mortar in order that the shower floors be level.

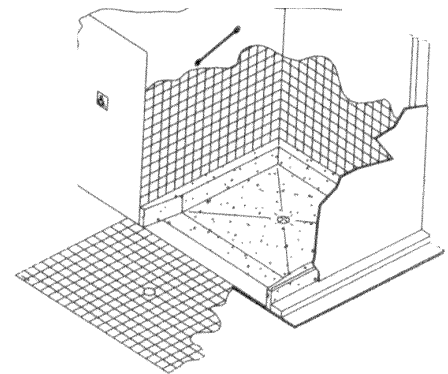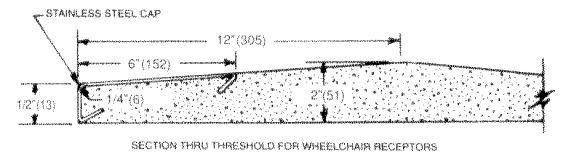

With Stainless Steel Threshold Only							
MODEL	SIZE	APPROX. SHIP WT.	A	B	C	D	E
WTR-4990	36 x 36	350 lbs/159 kg	36(914)	36(914)	18(457)	12(305)	12(305)
WTR-4995	39 x 39	365 lbs/166 kg	39(991)	39(991)	19½ (495)	12(305)	12(305)
WTR-5000	48 x 48	603 lbs/274 kg	48(1219)	48(1219)	24(610)	18(457)	12(305)
WTR-5001	60 x 48	623 lbs/283 kg	60(1524)	48(1219)	30(762)	18(457)	12(305)
WTR-5002	60 x 60	855 lbs/388 kg	60(1524)	60(1524)	30(762)	24(610)	12(305)
WTR-5003	42 x 70	800 lbs/363 kg	42(1067)	70(1778)	21(533)	9(229)	12(305)
WTR-5004	48 x 70	880 lbs/399 kg	48(1219)	70(1778)	24(610)	9(229)	12(305)
WTR-5005	60 x 70	1250 lbs/567 kg	60(1524)	70(1778)	30(762)	9(229)	12(305)
WTR-5006	60 x 30	590 lbs/268 kg	60(1524)	30(762)	30(762)	12(305)	12(305)
WTR-5007	60 x 36	600 lbs/272 kg	60(1524)	36(914)	30(762)	12(305)	12(305)