



Mumbo

MU LED

Features & benefits

Standard

Lamp

9.0 system watt LED, 3500K LED provides **high light output**

Power Supply

700 MA constant current class II or LPS rated - certified

Cord

9' cord from fixture to power supply. 8' cord with molded straight plug and detachable power supply for **easy installation**

Cord color

Black

City code

~

Switch

Silver toggle switch located on head

Optic

Conditioning optic w/diffuser

Arm


Single-articulating arm

Finish

Silver body with black head and base or silver body with white head and base

Mounting

Freestanding weighted base is supplied as the standard unless another base is specified



Certification

UL, CUL
Made in USA

Optional

Dimmable module - 100% to 15% dimming range

3.00" wide x 1.25" tall x 1.4" deep

ABS Plastic, Platinum finish

12' un-stretched coiled cord

Slide control to dim-slide right to left

The dimmer plugs into the Trillium LED power supply

Steel spring clip surface mounting bracket

~

7' cord with Railite™ or magnet-mount

~

Chicago (Railite™ mounting only)

~

~

~

~

Clamp-mount allows the Mumbo to be mounted to most freestanding or hanging work surfaces

Panel-mount allows the Mumbo to be mounted to various office furniture system panels

Railite™ allows the Mumbo to slide **silently along a rail** mounted under a bin or shelf

Magnet-mount allows the Mumbo to be mounted under metal bins or shelves




Light

enlightening the workspace.

Mumbo

MU LED

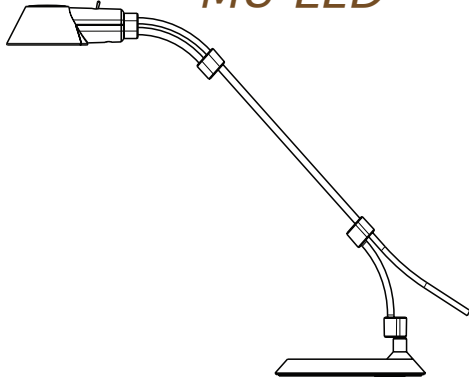

The **Mumbo LED** personal task light is an adjustable LED product consuming minimal levels of power, yet delivering warm 3500K illumination. This LED fixture adjusts to place a large pool of light where the user desires, with a flexible 18" articulating arm and five mounting choices. Available in white or black finish with chrome arms, the Mumbo is a cost effective solution for both open and private offices.

Base models

base number	watts
MU LED	9 system 6.5 fixture 2.17 per LED

Performance test installation data


base number	MU S
light source	LED
power supply	700 MA constant current, class II or LPS
power factor	NPF
optic	conditioning optic w/diffuser
measured plane	36" length x 24" width
face of light to work surface	15"

Photometric Information


Footcandles

		18"	15"	12"	9"	6"	3"	CL	3"	6"	9"	12"	15"	18"
Number of LEDs 3	12"	4	6	8	13	18	22	26	22	18	13	8	6	4
	9"	5	8	12	20	31	41	47	41	31	20	12	8	5
	6"	6	10	17	30	48	67	75	67	48	30	17	10	6
LED Wattage 2.17/ea 6.51 total	3"	7	12	21	40	66	93	104	93	66	40	21	12	7
	CL	7	14	24	44	74	103	115	103	74	44	24	14	7
	3"	7	12	21	40	66	93	104	93	66	40	21	12	7
Fixture Wattage 6.51	6"	6	10	17	30	48	67	75	67	48	30	17	10	6
	9"	5	8	12	20	31	41	47	41	31	20	12	8	5
	12"	4	6	8	13	18	22	26	22	18	13	8	6	4
System Wattage 9														

Footcandle ISO Plot

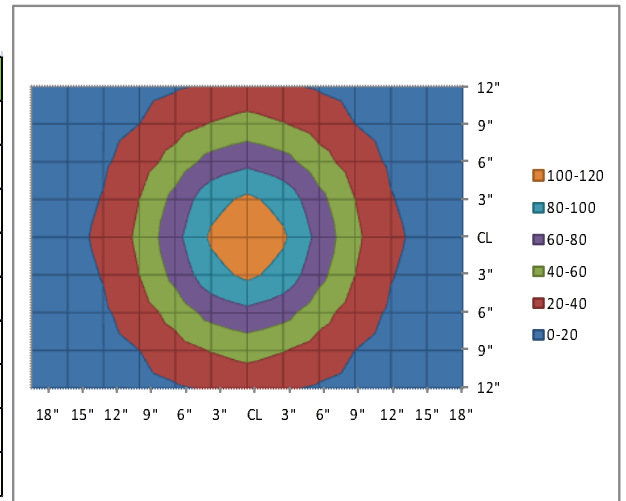

Mumbo MU Recyclability

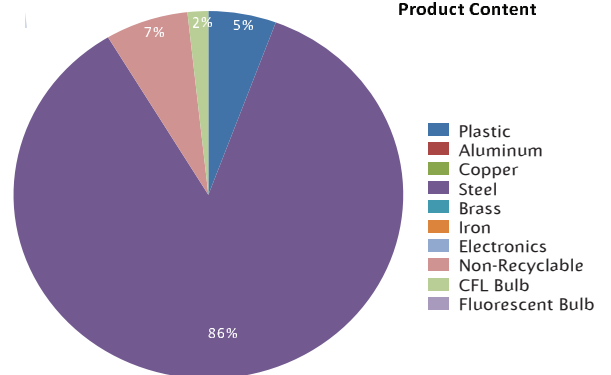

Light

enlightening
the workspace.

49417-8969
616.842.5100 phone
800.544.4899 free
616.846.2144 fax
www.lightcorp.com