

SIMPLEX® CEILINGS

255 Montpelier, St. Laurent
(Montreal) QC, Canada H4N 2G3
Tel: (800) 638-5726 Fax (514) 744-2716
www.simplexceilings.com

Specifications

Snap-In Series - Interior


Panels: Provide Simplex **Snap-In** system manufactured from 0.032" (0,81mm), 0.040" (1.0 mm), thick aluminum, galvanized steel, and stainless steel. Panel dimensions will be as shown on drawings. Panels to be un-perforated or perforated with a un-perforated border, using pattern defined by the architect. Panels can be un-scored or scored to form 12" x 12" (305 mm x 305 mm) modules.

Finish: Select from Simplex Ceiling standards for panels. Custom colors available upon request.

Suspension: Suspension shall be Snap Tee Bar direct or indirect

Perimeter: Provide Box Mould with Hold down Clips as required in finish to match panels.

Acoustical: For perforated panels, provide a 0.008" (0.2mm) thick Simplex "T" non-woven acoustical textile to be bonded to the inside face of the panels. Can also be provided in 1-1/2" (38 mm) thick x 3/4 lb/cu.ft (12 kg/m³) density glass wool fiber completely sealed in an incombustible bag and installed with accordion pad spacers placed between the panel back and acoustical pad.



Standard Sizes:	12" x 12"	12" x 24"	12" x 36"	12" x 48"
	12" x 60"	24" x 24"	24" x 48"	
Metric Sizes (mm):	305 x 305	305 x 610	305 x 914	305 x 1219
	305 x 1524	610 x 610	610 x 1219	

(Other custom sizes available upon request)

Features:


Concealed grid
Downward demountable
ISI - Point accessible
CF/SOB Inaccessible
Square edge
Beveled edge


Benefits:

Monolithic appearance
Low plenum heights
Easy above ceiling accessibility
Security ceilings or exterior soffits
Butt joint
Hides alignment variances

Interior Snap-In 24" x 24" (610 mm x 610mm)

Interior Snap-In 12" x 24" (305 mm x 610mm) with Optional Scoring to simulate 12" x 12" (305 mm x 305mm) modules

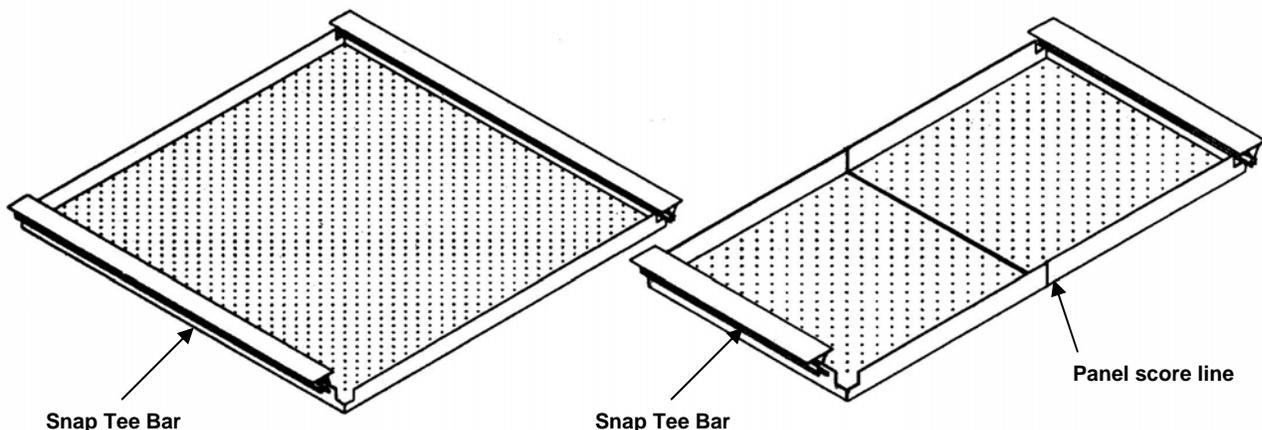



SIMPLEX® CEILINGS

255 Montpelier, St. Laurent
(Montreal) QC, Canada H4N 2G3
Tel: (800) 638-5726 Fax (514) 744-2716
www.simplexceilings.com

Specifications


Snap-In Series - Interior

Snap Tee Bar Suspension for Interior system

Indirect Suspension: Galvanized steel Snap Tee Bar 10' (3 m) attached perpendicular to 1-1/2" (38 mm) black iron channels (by others) with Snap Tee Bar Wire Clip. Snap Tee Bars should be in parallel to the length of the panel center and level to within 1/4" (6 mm) in 10' (3 m). Panels are then snapped into Tee Bar.

When to use:

- Hanger spacing can be varied in both directions.
- Easy panel removal.

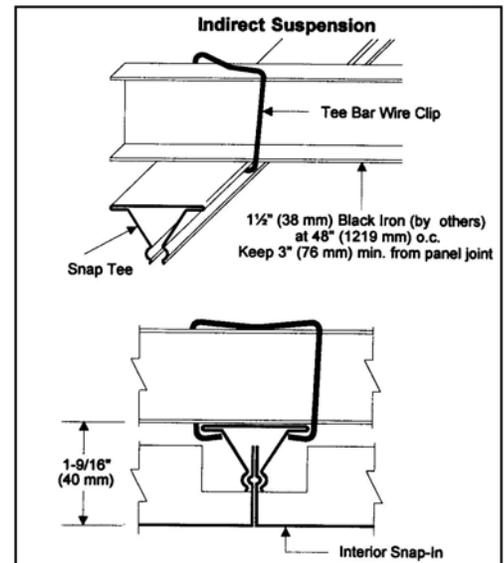

Direct (contact) Suspension: Galvanized steel Snap Tee Bar 10' (3 m) used with Space Miser Clip and/or Tee Bar Bottom Hanger attached to overhead structure. Space clips to 48" (1219 mm) on center maximum, in line to receive galvanized steel Snap Tee Bar. Install galvanized steel Snap Tee Bar system parallel to the length of the panel and level to within 1/4" (6 mm) in 10' (3 m).

When to use:

- Enables ceiling to be hung in as little as 1-9/16" (40 mm). Can be used on wall surfaces.
- Easy panel removal.
- When suspending ceiling from exposed wood beam use Tee Bar Bottom Hanger.

